



01/05/IT Low Profile Dual Wheel Swivel Casters - Up to 400lb

- Provide the highest possible weight capacity at the lowest overall height
- Dual wheels for best mobility with maximum load capacity
- Modular kingpin available in various stems
- NSF Listed and RoHS Compliant
- Broad range of mounting options
- Double ball bearings raceway
- Zinc Plated or Black Finish

05HR20AB8106YY



01RK30AI8206SY



01HR20AB8168YY



01PO20AB8191YY



Thumb Screw Brake(R)	Black Finish(X)	Side Lock Brake(S)	Vertical Top Lock Brake(V)

Applications:

Vending Machines

Commercial Appliance

Reach-in Coolers & Freezer Units

Computer Racks

Fastening Options (Replace ** in part number with desired plate or stem code)				
Plate Code	Overall Size	Bolt Hole Pattern		Mounting Bolt Size
06	2-3/8" x 3-5/8"	1-3/4" x 2-7/8" slotted to 3"		5/16"
11	3-1/8" x 4-1/8"	1-3/4" x 2-15/16" to 2-3/8" x 3-3/8"		5/16"
17	4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"		3/8"
Series	Wheel Dia.	Wheel Code	Overall Height	Swivel Radius
01	2"	20	2-7/8"	1-7/8"
05	2"	20	2-31/32"	1-7/8"
01	3"	30	4"	2-1/4"
		32		2-1/2"
		31		2-7/8" (Extended Radius to allow V-BRAKE)

*Reduce Overall Height by 1/8" for stem casters.



Stems Available for Modular kingpin(ZZ)						Standard Stem					
Stem Code	Size	Modular Stem Part #	Stem Type			Stem Code	Size	Stem Type			
91	7/16" x 1-3/8"	07STG91	Grip ring			91	7/16" x 1-3/8"	Grip Ring			
92	5/8" x 2-3/16"	07STG92				Threaded					
93	13/16" x 2-3/16"	07STG93									
95	0.846" x 2-3/16"	07STG95									
48	0.865" x 2-1/2"	07STG48									
85	1" x 2-3/16"	07STG85									
82	1-1/8" x 2-3/16"	07STG82									
22	1-1/4" x 2-3/16"	07STG22									
23	1-3/8" x 2-3/16"	07STG23									
51	3/4" x 2"	07STS51					89	5/8"-11x1-1/4"			
41	7/8" x 2-1/4"	07STO41					87	3/4" - 10 x 1-3/4"			
43	9/16" x 2-15/16"	07STS43									
55	7/8" x 2"	07STS55	Square Stem, w/ 3 CX								
79	7/16" - 14 x 2-1/4"	07STT79	Threaded Stem								
33	7/16" -14 x 1-1/2"	07STT33									
C8	1/2" -13 x 3-1/8"	07STTC8									
C1	1/2" - 13 x 4"	07STTC1									
80	5/8" - 11 x 1"	07STT80									
C2	5/8" - 11 x 4"	07STTC2									
87	3/4" -10 x 1-3/4"	07STT87									
C3	3/4" - 10 x 6"	07STTC3									
M1	M10-1.5x1-1/2"	07SSM1015									
M3	M12 - 1.75 x 1-3/4"	07STM12-134									
M6	M16 - 2 x 1-1/2"	07STM16-112									
M7	M20 - 2.5 x 1-3/4"	07STM20-134									
70	1/2" - 13 x 2-3/4"	07STT70									
71	.720" - .851"					Rounded Expandable Adaptor					
7B	.920" - .980"										
72	.852" - .919"										
73	.935" - 1.029"										
7A	1.020" - 1.100"										
74	1.030" - 1.14"										
75	1.110" - 1.180"										
76	1.426" - 1.589"										
77	1.790" - 1.850"										
78	1.178" - 1.303"										
R1	.720" - .851"		Expandable Adaptor for Squared Tubing								
R2	.852" - .927"										
R3	.928" - 1.029"										
R4	1.030" - 1.140"										
R5	1.360" - 1.425"										
R6	1.426" - 1.589"										
Wheel Diameter	Tread Width		Wheel Type	Load Capacity	Bearing Type	Part #	Available Fastening Pattern (Replace ** with desired fastening Options)				
2"	13/16" x 2	Hard Rubber	225	Plain	01HR20AB81**YY	06, 62, 67, 68					
		Polyolefin	250	Plain	01PO20AB81**YY	06, 62, 67, 68, 91					
		Hard Rubber	250	Plain	05HR20AB81**YY	06, 89					
		Glass Filled Nylon	400	Plain	05MA20AO81**YY	06,89					
		Ploy-Pro™	300	B. Bearing	05PP20OI4981YY	P0,80					
3"	7/8" x 2	Hard Rubber	350	Plain	01HR31AB81**YY	06, 11, 17, 35, 59, 61, 62, 66, 67, 68, 81, 87, ZZ					
			250	Plain	01HR30AB82**YY	06, 11					
			250	Plain	01HR32AB82**YY	06, 11					
		Grayrok™	350	Plain	01RK31AB81**YY	06, 11, 17, 35, 59, 61, 62, 66, 67, 68, 81, 87, ZZ					
			350	Plain	01RK30AI82**YY	06, 11					
			350	Plain	01RK32AI82**YY	06, 11					



03/04/05 Low Profile Casters - Up to 500lb

- Provide the highest possible weight capacity at the lowest overall height
- Double ball bearings raceway
- NSF Listed and RoHS Compliant
- Broad range of mounting options
- Zinc Plated or Black Finish

03PH30IB3659YY



03MA20IB8106YY



03PO30IB8267YY



04PH30IB3606YY



03PM30IB6206YY



03PO30IB8268VY



03PO30IB8268RY



03UX25IO6206YY



Thumb Screw Brake (R)

Black Finish (X)

Side Lock Brake (S)

Vertical Top Lock Brake (V)



Applications:

Vending Machines

Commercial Appliances

Reach-in Coolers and Freezer Units

Computer Racks

Fastening Options (Replace ** in part number with desired plate or stem code)

Plate Code	Overall Size	Bolt Hole Pattern		Mounting Bolt Size
06	2-3/8" x 3-5/8"	1-3/4" x 2-7/8" slotted to 3"		5/16"
11	3-1/8" x 4-1/8"	1-3/4" x 2-15/16" to 2-3/8" x 3-3/8"		5/16"
17	4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"		3/8"
Series	Wheel Dia.	Wheel Code	Overall Height	Swivel Radius
03	1-7/16"	16	2-1/4"	1-1/2"
	2"	20	2-7/8"	1-7/8"
	2.5"	25	3-1/2"	2-1/4"
	2.5"	24		2-1/2"
05	2"	20	2-31/32"	1-7/8"
03	3"	30	4"	2-1/4"
		32		2-1/2"
		31		2-7/8"

*Reduce Overall Height by 1/8" for stem casters.



Stems Available for Modular Kingpin(ZZ)				Standard Stem		
Code	Size	Part #	Stem Type	Code	Size	Stem Type
B1	1.49" x 1-7/8"	07STGB1	Adjustable 1.875" - 3" for 1.5" I.D. Tubing	91	7/16" x 1-3/8"	Grip Ring
E1	2-3/8" x 3-5/8"	07STAE1	Adjustable range 1.75" - 2.375"	61	3/8"-16 x 1"	Threaded
E2		07STAE2	Adjustable range 1.875" - 2.5"	62	3/8-16 x 1-1/2"	
E3		07STAE3	Adjustable range 3.5" - 4.125"	35	1/2"-13 x 1/2"	
E4		07STAE4	Adjustable range 3.5" - 5"	66	1/2"-13 x 3/4"	
91	7/16" x 1-3/8"	07STG91	Grip Ring	67	1/2"-13 x 1"	
92	5/8" x 2-3/16"	07STG92		68	1/2"-13 x 1-1/2"	
93	13/16" x 2-3/16"	07STG93		59	1/2"-13 x 1-3/4"	
95	0.846" x 2-3/16"	07STG95		89	5/8"-11 x 1-1/4"	
48	0.865" x 2-1/2"	07STG48		81	5/8"-11 x 1-3/4"	
85	1" x 2-3/16"	07STG85		88	3/4"-10 x 1"	
82	1-1/8" x 2-3/16"	07STG82		87	3/4"-10 x 1-3/4"	
22	1-1/4" x 2-3/16"	07STG22				
23	1-3/8" x 2-3/16"	07STG23				
41	0.875" x 2-1/4"	07STO41	Octagon Stem, w/ Grip Ring and CRX 5/16"			
51	3/4" x 2"	07STS51	Octagon Stem, w/ 3 CRX DRL 5/16"			
43	9/16" x 2-15/16"	07STS43	Square Stem, w/ 2 CRX DRL 5/16"			
55	7/8" x 2"	07STS55	Square Stem, w/ 3 CRX DRL 1/4"			
79	7/16" - 14 x 2-1/4"	07STT79	Threaded Stem			
33	7/16" -14 x 1.5"	07STT33				
C8	1/2" -13 x 3-1/8"	07STTC8				
C1	1/2" - 13 x 4"	07STTC1				
80	5/8" - 11 x 1"	07STT80				
C2	5/8" - 11 x 4"	07STTC2				
87	3/4" -10 x 1-3/4"	07STT87				
84	3/4" - 10 x 4"	07STT84				
C3	3/4" - 10 x 6"	07STTC3				
M10	M10-1.5 x 1.5"	07SSM1015				
M3	M12 - 1.75 x 1-3/4"	07STTM12-134				
M6	M16 - 2 x 1-1/2"	07STTM16-112				
M7	M20 - 2.5 x 1-3/4"	07STTM20-134				
70	1/2"-13 x 2-3/4"	07STT70				
71	.720" - .851"	ADP7134	Rounded Expandable Adaptor			
7B	.920" - .980"	ADP7992				
72	.852" - .919"	ADP7278				
73	.935" - 1.029"	ADP7310				
7A	1.020" - 1.100"	ADP7A16				
74	1.100" - 1.180"	ADP7418				
75	1.360" - 1.425"	ADP7538				
76	1.426" - 1.589"	ADP7615				
77	1.790" - 1.850"	ADP7717				
78	1.178" - 1.303"	ADP7814				
R1	.720" - .851"	ADS7134	Expandable Adaptor for Squared Tubing			
R2	.852" - .927"	ADS7278				
R3	.928" - 1.029"	ADS7310				
R4	1.030" - 1.140"	ADS7418				
R5	1.360" - 1.425"	ADS7538				
R6	1.426" - 1.589"	ADS7615				
R7	1.790" - 1.850"	ADS7717				



Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Bearing Type	Swivel Part #	Rigid Part #	Available Fastening Options (Replace ** with desired fastening Options)
1-7/16"	1-11/16"	Polyolefin	300	Plain	03PO16IB81**YY		06,11,68
2"	1-3/4"	Glass Filled Nylon	300	Roller	03MA20IB29**YY	04MA20IB29**YY	06
			300	Plain	03MA20IB81**YY	04MA20IB81**YY	06
		Glass Filled Nylon	300	Roller	03MA20IB29**YY		62,67,68
			300	Plain	03MA20IB81**YY		62,67,68
		Grayrok™	300	Plain	03RK20II81**YY	04RK20II81**YY	06
		Grayrok™	300	Plain	03RK20II81**YY		62,67,68
		Polyolefin	300	Plain	03PO20IB81**YY	04PO20IB81**YY	06
		Polyolefin	300	Plain	03PO20IB81**YY		59,62,67,68,91
		Glass Filled Nylon	400	Roller	05MA20IB29**YY		06,89
			400	Plain	05MA20IB81**YY		06,89
2"	1-3/4"	Polyolefin	300	Plain	05PO20IB81**YY		06,89
2-1/2"	1-3/4"	Glass Filled Nylon	400	Roller	03MA25IB08**YY	04MA25IB08**YY	06,11,17
			400	Bushing	03MA25IB90**YY	04MA25IB90**YY	06,11,17
		Ironman™	400	Pre. Ball	03NX25IB62**YY	04NX25IB62**YY	06,11,17
		Polyolefin	350	Roller	03PO25IB08**YY	04PO25IB36**YY	06,11,17
			350	Bushing	03PO25IB82**YY	04PO25IB82**YY	06,11,17
		Ultraflex™	200	Pre. Ball	03UX25IO62**YY	04UX25IO62**YY	06,11,17
		Glass Filled Nylon	400	Roller	03MA25IB08**YY		59,67,68,81,ZZ
			400	Bushing	03MA25IB90**YY		59,67,68,81,ZZ
		Ironman™	400	Pre. Ball	03NX25IB62**YY		59,67,68,81,ZZ
		Polyolefin	350	Roller	03PO25IB08**YY		59,67,68,81,ZZ
			350	Bushing	03PO25IB90**YY		59,67,68,81,ZZ
3"	1-3/4"	Glass Filled Nylon	500	Roller	03MA30IB08**YY		35,61,62,66,59,67,68,81,87,ZZ
			500	Pre. Ball	03MA30IB62**YY		35,61,62,66,59,67,68,81,87,ZZ
			500	Bushing	03MA30IB90**YY		35,61,62,66,59,67,68,81,87,ZZ
		Phenolic	500	Roller	03PH30IB08**YY		35,61,62,66,59,67,68,81,87,ZZ
		Ironman™	500	Pre. Ball	03NX30IB63**YY		35,61,62,66,59,67,68,81,87,ZZ
		Polyolefin	450	Pre. Ball	03PO30IB62**YY		35,61,62,66,59,67,68,81,87,ZZ
			450	Roller	03PO30IB08**YY		35,61,62,66,59,67,68,81,87,ZZ
			450	Bushing	03PO30IB90**YY		35,61,62,66,59,67,68,81,87,ZZ
			450	Plain	03PO30IB82**YY		35,61,62,66,59,67,68,81,87,ZZ
			460	Plain	03PO30II82**YY		35,61,62,66,59,67,68,81,87,ZZ
		Polymadic™	300	Pre. Ball	03PM30IM62**YY		35,61,62,66,59,67,68,81,87,ZZ
		Ultraflex™	250	Pre. Ball	03UX30IO62**YY		35,61,62,66,59,67,68,81,87,ZZ
		Glass Filled Nylon	500	Roller	03MA30IB08**YY	04MA30IB08**YY	06,11,17
			500	Pre. Ball	03MA30IB62**YY	04MA30IB62**YY	06,11,17
			500	Bushing	03MA30IB90**YY	04MA30IB90**YY	06,11,17
		Phenolic	500	Roller	03PH30IB08**YY	04PH30IB08**YY	06,11,17
		Ironman™	500	Pre. Ball	03NX30IB63**YY	04NX30IB63**YY	06,11,17
		Polyolefin	450	Pre. Ball	03PO30IB62**YY	04PO30IB62**YY	06,11,17
			450	Roller	03PO30IB08**YY	04PO30IB08**YY	06,11,17
			450	Bushing	03PO30IB90**YY	04PO30IB90**YY	06,11,17
			450	Plain	03PO30IB82**YY	04PO30IB82**YY	06,11,17
			450	Plain	03PO30II82**YY	04PO30II82**YY	06,11,17
		Ultraflex™	250	Pre. Ball	03UX30IO62**YY	04UX30IO62**YY	06,11,17
		Glass Filled Nylon	500	Roller	03MA31IB36**YY	04MA30IB36**YY	06,11,17
			500	Pre. Ball	03MA31IB62**YY	04MA30IB62**YY	06,11,17
			500	Bushing	03MA31IB90**YY	04MA30IB90**YY	06,11,17
		Phenolic	500	Roller	03PH31IB08**YY	04PH30IB08**YY	06,11,17
		Ironman™	500	Pre. Ball	03NX31IB63**YY	04NX30IB63**YY	06,11,17
		Polyolefin	450	Pre. Ball	03PO31IB62**YY	04PO30IB62**YY	06,11,17
			450	Roller	03PO31IB36**YY	04PO30IB36**YY	06,11,17
			450	Bushing	03PO31IB90**YY	04PO30IB90**YY	06,11,17
			450	Plain	03PO31IB82**YY	04PO30IB82**YY	06,11,17
			460	Plain	03PO31II82**YY	04PO30II82**YY	06,11,17
		Polymadic™	300	Pre. Ball	03PM30IM62**YY	04PM30IM62**YY	06,11,17
		Ultraflex™	250	Pre. Ball	03UX31IO62**YY	04UX30IO62**YY	06,11,17
		Glass Filled Nylon	500	Roller	03MA32IB08**YY	04MA30IB08**YY	06,11
			500	Pre. Ball	03MA32IB62**YY	04MA30IB62**YY	06,11
			500	Bushing	03MA32IB90**YY	04MA30IB90**YY	06,11
		Phenolic	500	Roller	03PH32IB36**YY	04PH30IB36**YY	06,11
		Ironman™	500	Pre. Ball	03NX32IB63**YY	04NX30IB63**YY	06,11
		Polyolefin	450	Pre. Ball	03PO32IB62**YY	04PO30IB62**YY	06,11
			450	Roller	03PO32IB08**YY	04PO30IB08**YY	06,11
			450	Bushing	03PO32IB90**YY	04PO30IB90**YY	06,11
			450	Plain	03PO32IB82**YY	04PO30IB82**YY	06,11
			460	Plain	03PO32II82**YY	04PO30II82**YY	06,11
		Ultraflex™	250	Pre. Ball	03UX32IO62**YY	04UX30IO62**YY	06,11

05 Low Profile Casters - Up to 1200lb

- Provide the highest possible weight capacity at the lowest overall height
- NSF Listed and RoHS Compliant
- Double ball bearings raceway
- Zinc Plated or Black Finish
- 1/2" axle

05MA30IB3612XY

05PO3AIB8367TY

05PO30IB8359RY



Thumb Screw Brake (R)	Black Finish (X)	Top Lock Brake (T)

Applications:

Vending Machines
Commercial Appliance
Reach-in Coolers & Freezer Units
Computer Racks
Business Machinery
NFS Listed

Fastening Options (Replace ** in part number with desired plate or stem code)			
Plate Code	Overall Size	Bolt Hole Pattern	Mounting Bolt Size
12	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	5/16"
17	4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"
Stem Code	Pattern	Stem Type	
67	1/2"-13"x1"	Threaded	
59	1/2" - 13" X 1-3/4"		
81	5/8" - 11" X 1-3/4"		
Wheel Dia.	Wheel Code	Overall Height	Swivel Radius
3"	30	4-5/32"	2-3/8"
	3A	4-5/16"	2-3/4"

*Reduce Overall Height by 3/16" for stem casters



Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Bearing Type	Swivel Part #	Rigid Part #	Available Fastening Options (Replace ** with desired fastening Options)
3"	1-13/16"	Glass Filled Nylon	1100	Roller	05MA30IB36**YY	06MA30IB36**YY	12, 7,59,81
			1100	Pre. Ball	05MA30IB63**YY	06MA30IB63**YY	
			1100	Plain Bore	05MA30IB83**YY	06MA30IB83**YY	
		Phenolic	1000	Roller	05PH30IB36**YY	06PH30IB36**YY	
		Ironman™	1200	Pre. Ball	05NX30IB63**YY	06NX30IB63**YY	
		Polyolefin	500	Pre. Ball	05PO30IB63**YY	06PO30IB63**YY	
			500	Roller	05PO30IB36**YY	06PO30IB36**YY	
			500	Plain	05PO30IB83**YY	06PO30IB83**YY	
		Gray Polyolefin	500	Plain	05PO30IIB83**YY	06PO30IIB83**YY	
		Ultraflex™	450	Pre. Ball	05UX30IO62**YY	06UX30IO62**YY	
3"	1-13/16"	Glass Filled Nylon	1100	Roller	05MA3AIB36**YY	06MA3AIB36**YY	17,67
			1100	Pre. Ball	05MA3AIB63**YY	06MA3AIB63**YY	
			1100	Plain Bore	05MA3AIB83**YY	06MA3AIB83**YY	
		Phenolic	1000	Roller	05PH3AIB36**YY	06PH3AIB36**YY	
		Ironman™	1200	Pre. Ball	05NX3AIB63**YY	06NX3AIB63**YY	
		Polyolefin	500	Pre. Ball	05PO3AIB63**YY	06PO3AIB63**YY	
			500	Roller	05PO3AIB36**YY	06PO3AIB36**YY	
			500	Plain	05PO3AIB83**YY	06PO3AIB83**YY	
		Gray Polyolefin	500	Plain	05PO3AII83**YY	06PO3AII83**YY	
		Ultraflex™	450	Pre. Ball	05UX3AIO62**YY	06UX3AIO62**YY	

Notes

5A Low Profile Casters - Up to 1200lb

- Provide the highest possible weight capacity at the lowest overall height
- Zinc Plated or Black Coating Finish
- NSF Listed and RoHS Compliant
- Double ball bearings raceway
- 1/2" Axle

5AMA3AIB0812YY

5AMA30IB0812XY

5BMA30IB0812YY



Applications:

Vending Machines
Commercial Appliance
Business Machinery
Computer Racks
Reach-in Coolers & Freezer Units

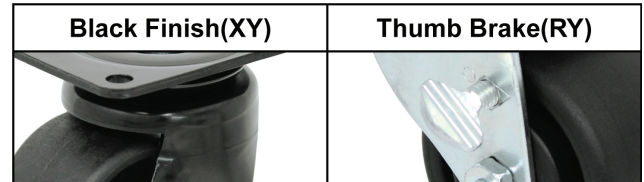


Plate Code	Overall Size		Bolt Hole Pattern	Mounting Bolt Size	
12	3-1/8" x 4-1/8"		2-3/8" x 3-3/8"	5/16"	
Wheel Dia.	Caster Type	Overall Height	Swivel Radius		
3"	5A	4-3/32"	2-3/4"		
	5B		2-1/4"		
Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Bearing Type	Swivel Part #
3"	1-13/16"	Polymadic™	350	Precision	5APM30IM6212YY
		Glass Filled Nylon	1100	Roller	5AMA30IB0812YY
			1100	Precision	5AMA30IB6212YY
			1100	Plain	5AMA30IB8312YY
		Phenolic	1000	Roller	5APH30IB3612YY
		Ironman™	1200	Precision	5ANX30IB6212YY
		Polyolefin	500	Precision	5APO30IB6212YY
			500	Roller	5APO30IB0812YY
			500	Plain	5APO30IB8312YY
			500	Plain	5APO30IB8312YY

LB Low Profile Shock Absorbing - Up to 500lb

- Shore A 85 Ergonomic Polyurethane wheel provides a cushioned ride with minimal force to operate
- Double ball bearings raceway
- Zinc Plated
- 1/2" axle

LBUX30IO6312YY



Applications:

Shock sensitive machinery

Fastening Options (Replace ** in part number with desired plate or stem code)								
Plate Code		Overall Size			Bolt Hole Pattern		Mounting Bolt Size	
12		3-1/8" x 4-1/8"			2-3/8" x 2-3/8"		5/16"	
Wheel Dia.	Wheel Width	Wheel Type	Load Capacity	Part #	Overall Height	Swivel Radius	Maximum Load to full compression(lb)	Height at full Compression
3"	1-7/8"	Ultraflex	500	LBUX30IO6312YY	4-23/32"	2-3/8"	125	4-7/16"



5H Low Profile Casters - Up to 1760lb

- Provide the highest weight capacity at the lowest overall height
- NSF Listed and RoHS Compliant
- Hardened Dual Raceway
- 1/2" grade 8 bolt
- Zinc Plated

5HNX25JB0917YY



5HNX25JB0912YY



Applications:

Conveyer Stands
Computer Cabinets

Any equipment where low height is critical while requiring heavy load rating

Plate Code	Overall Size		Bolt Hole Pattern				Mounting Bolt Size	
7X	4" x 4-1/2"		2-13/16" x 3-5/16"				3/8"	
12	3-1/8" x 4-1/8"		2-3/8" x 3-3/8"				5/16"	
Wheel Dia.	Tread Width	Wheel Type	Load Capacity	Bearing Type	Swivel Part #	Rigid Part #	Overall Height	Swivel Radius
2.5"	2"	Ironman™	1760	Caged Roller	5HNX25JB097XYY	6HNX25JB097XYY	3-11/16"	1-3/4"
			1200		5HNX25JB0912YY	6HNX25JB0912YY	3-5/8"	2-1/4"

LV SERIES


- AC Rubber leveling cushion pad for constant pressure and temperature change
- Rear accessible thumb wheel to adjust the leveling pad
- Aluminum Die-Cast rig, Powder coating finish
- NSF Listed and RoHS Compliant
- Forged Steel Plate, Zinc Plated
- Double Ball Bearings Raceways
- High quality Nylon wheel

Applications:


Telecom/Broadcasting Console
LAB/Research Equipment
Medical Equipment
Office Business Equipment
Electronic Equipment
Food/Retail Equipment
Conveyer Stands
Work Stations
Assembly Machinery




Top plate diagram of ALL 8 sizes, dimension, bolt hole patterns including info of plate and mounting bolt diameter




LV0050V1




LV0050V2




LV0600V3




LV0300V4




LV0600V4



LV0300V5



LV1000V6



LV1000V7

Wheel Dia.	Tread Width	Wheel Type	Swivel Caster #	Static Load Capacity	Overall Height	Adjustment Range	Fastening Specificaiton	Attaching Bolts Size
42mm(1.65")	18mm(0.71")	Nylon	LV0050V1	110	2.8"	+0.47"	Plate 2.16" SQ. Hole Space 1.65" SQ	1/4"
			LV0050V2				Threaded Hollow Kingpin	M8-1.25
50mm(1.97")	22mm(0.87")		LV0300V4	600	3.23"	+0.47"	Plate 2.87" SQ. Hole space 2.8" SQ	1/4"
			LV0300V5				Threaded Hollow Kingpin	M12-1.75
62mm(2.44")	29mm(1.14")		LV0600V3	1300	4.02"	+0.59"	Plate 3.54" SQ Hole space 2.77" SQ	5/16"
			LV0600V4				Threaded Hollow Kingpin	M12-1.75
72mm(2.83")	31mm(1.22")		LV1000V6	2200	4.72"	+0.79"	Plate 3.54" SQ. Hole Space 2.77" SQ	5/16"
			LV1000V7				Threaded Hollow Kingpin	M12-1.75