

DURABLE SUPERIOR CASTERS

STAINLESS SERIES

2020



1-800-848-4517

www.durableusa.com

Table of Contents


Introduction	2
Manufacturer's Limited Warranty Policy	5
Top Plates	6
Threaded Stems	7
Grip Ring and Cross Drilled Stems	8
Part Number Reference Guide	8
15/16	15
S7/S8/S9	22
73/74/7T	28
MT/MD/MV	34
RZ/RT/RB	40
B1/B2/B3	44
31/32/TS	50
S5/S6	55
4S	60
SS Floor Locks	65
S57/S58	66
S61/S62	68
SS LV-Leveling Series	70
Conductive Wheels	71
Hardware	76



DURABLE USA INC.

Durable Superior Casters first opened its doors in 1991 and has become one of the most trusted and dependable caster and wheel companies in North America. We are privately owned and offer both field sales support and engineering support. Through a process of continuous growth, we now have assembly plants in CA, TX, OH and WA as well as our newly opened Mexico assembly plant. Our products and services are broadly sold throughout North America, Mexico and South America. Our customer base includes many international OEMs in various industries such as automotive, aerospace, technology, medical, foodservice, retail etc.

With a total of over 750,000 square feet of warehouse space in CA, TX, OH, WA and Mexico, we are the largest in-stock caster supplier in Northern America able to provide prompt volume delivery requirements.

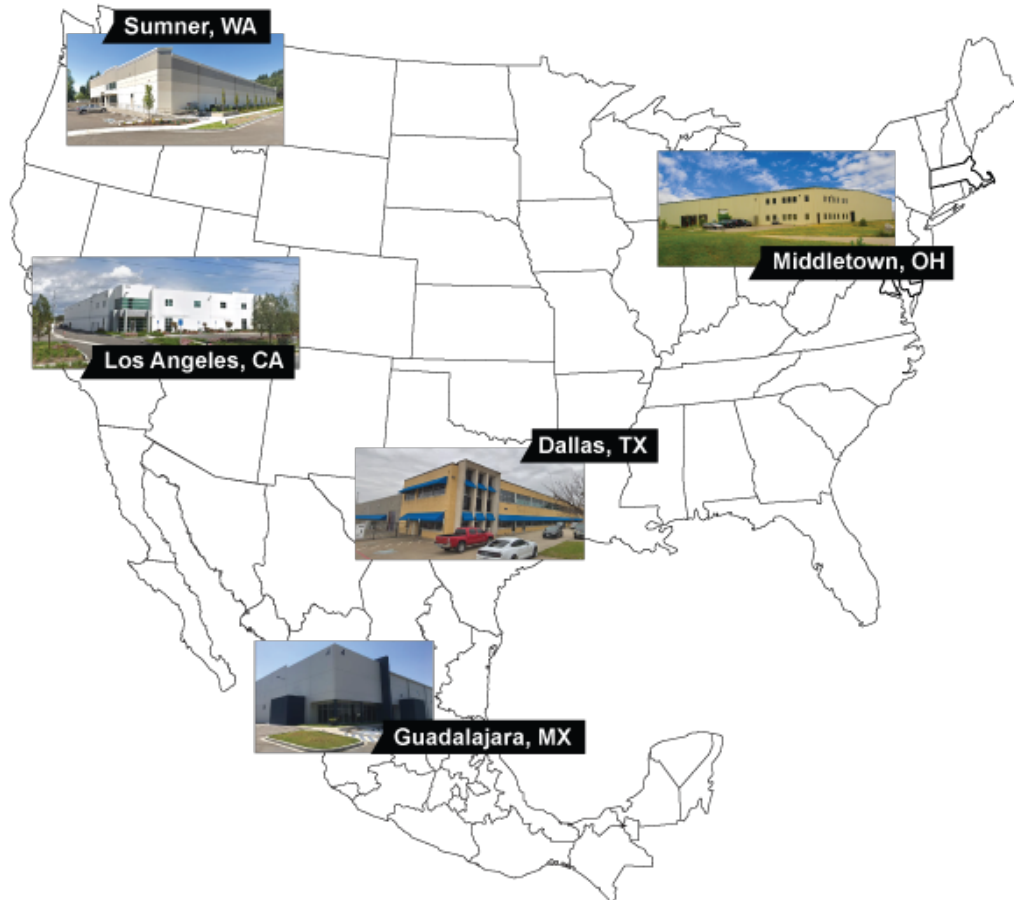

Only Superior Casters are Durable! 2




Durable has the largest and most sophisticated testing and design facilities in the US and North America. Our engineering capacity and strength provides an assurance of quality as well as ongoing innovation of products to provide custom solutions for any caster needs in unique applications. All casters are tested to meet or exceed the criteria established by the ICWM (Institute of Caster & Wheel Manufacturers) a prominent Division of MHI.

Durable has over one million different standard casters to meet all load requirements, with capacities ranging from 50 lbs to 40,000 pounds per caster. We offer load heights (OAH) from 2" to 25". Durable also offers a number of finishes, including stainless, zinc, brass, nickel, and chrome finish as well as non-metal options, such as composite casters. We can also handle towing requirements up to 10 miles per hour. We are proud of our record of continuous development and expansion of new product innovations to meet our customers need for different and challenging applications.

We continuously adapt to innovative automation to assure quality consistency and improve cost structure.

Our committed and experienced customer service team has earned many long-term business partners. We are committed to taking care of every customer's unique needs. We have significantly grown our lines of ergonomically efficient caster products in order to meet industries increased focus in this area.

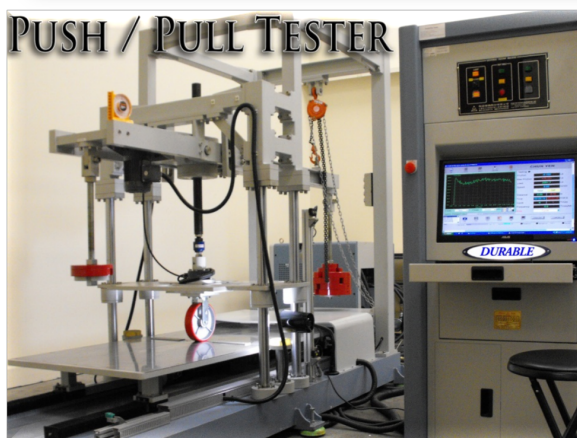



Our committed and experienced customer service team has earned many long-term business partners. We are committed to taking care of every customer's unique needs. We have significantly grown our lines of ergonomically efficient caster products in order to meet industries increased focus in this area.

Through the continual implementation of the latest technologies, Durable Casters has been able to sustain both cost efficiency and maximum quality consistency, allowing for continued growth and leadership in the caster industry.



Only Superior Casters are Durable! 4



We Are Always Around!

Since first opening our doors over 25 years ago, Durable Superior Casters has become one of the best known caster and wheel companies in North America thanks to quality manufacturing, competitive pricing, responsive customer service, and relentless pursuit of innovation in new product development.

Manufacturer's Limited Warranty Policy










Durable Superior Casters® number one pledge is Quality. Our comprehensive Engineering Test Lab performs product tests to meet the standards of the Institute of Caster and Wheel Manufacturers (ICWM), the National Sanitation Foundation (NSF), Restriction of Hazardous Substance (RoHS) and the special requirements of virtually all manufacturers. Durable Superior Casters® products are warranted against defects in material and workmanship for different periods of time from the date of purchase. This warranty does not cover damages caused by misapplication, misuse, abuse, modification, improper installation, or lack of regular lubrication maintenance. Any product that is claimed to be defective and is returned to any one of Durable Superior Casters® warehouses with prior approval will be repaired or replaced free of charge (excluding freight and installation). This warranty is exclusive and there are no other warranties, express or implied, such as an implied warranty of merchantability or fitness for particular purpose. This remedy is the sole remedy in contract, tort or otherwise, and Durable Superior is not liable for incidental, consequential or special damages.





Three-Year Warranty:


We offer a three year limited warranty on complete casters only; assembled and shipped by us in the following series: 45/46, 47/48, 49/50, 57/58, 61/62, 63/64, 65/66, D1/R1, D2/R2, D3/R3, and D4/R4 with Forged Steel, Ductile, Ultra-Poly, ErgoLastomer, Solid Steel, Solid Steel V-Groove, Champion and PolyFlexon wheels, equipped with either precision ball bearings or tapered bearings. Warranty does not apply on any hybrid casters using a combination of Durable Superior Casters® parts with any other manufacturer's parts.

General Warranty:

All Durable Superior Casters® products not mentioned above are covered with a one-year limited warranty from the date of purchase. Durable's engineering department has been building a library of 3D models and 2D drawings for our customer's use. If you have a requirement please contact your distributor or Durable customer service representative. Engineering Services, Continued Improvement and Innovation We Are Always Around! Since first opening our doors over 25 years ago, Durable Superior Casters has become one of the best known caster and wheel companies in North America thanks to quality manufacturing, competitive pricing, responsive customer service, and relentless pursuit of innovation in new product development.

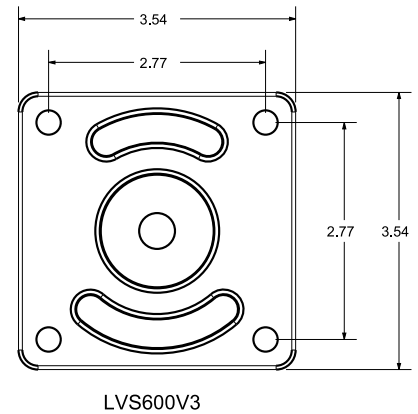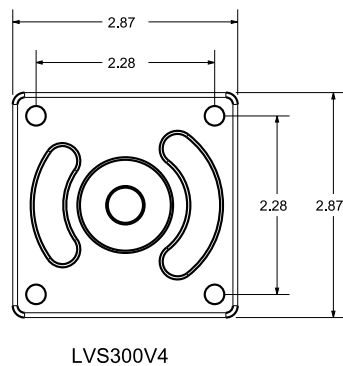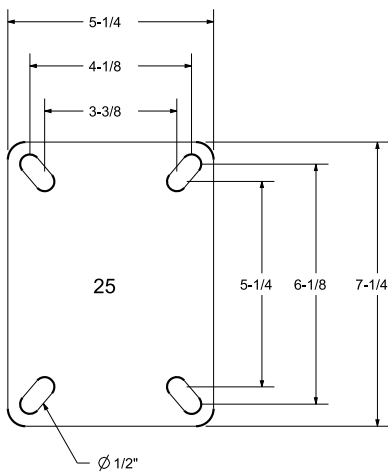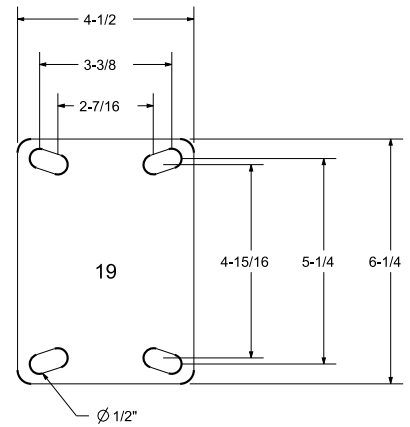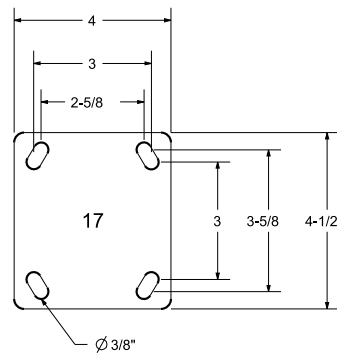

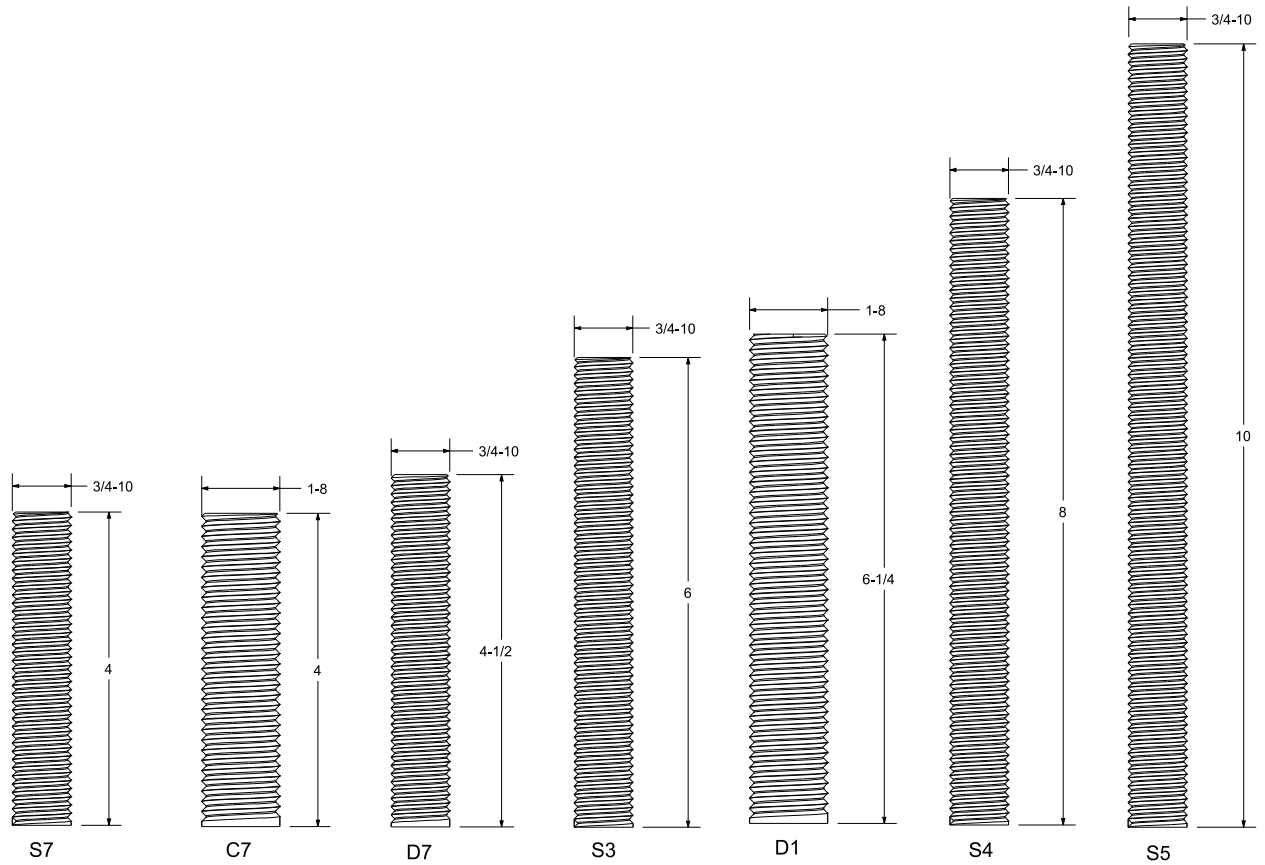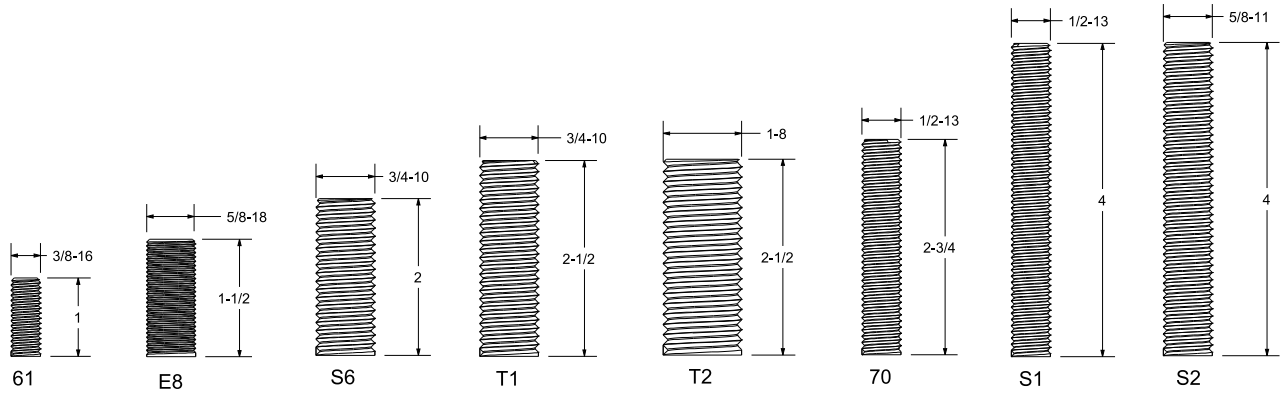

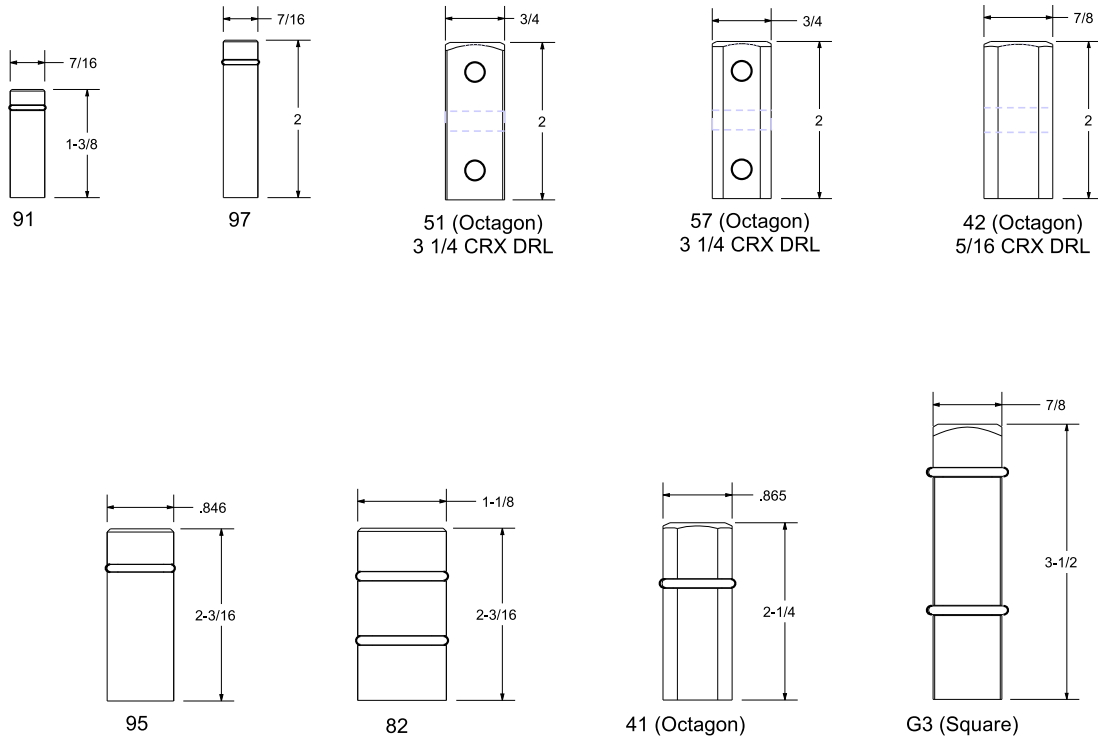

CASTER PART # EXAMPLE

15 TP 50 G I 4S 06 TY

1

2

3

4

5

6

7

8

WHEEL PART # EXAMPLE

Wheel
Type

Wheel
Width

Bearing
Options

Caster
Options

Caster
Series

Wheel
Diameter

Wheel
Color

Fastening
Options

Only Superior Casters are Durable! 8

**1 - CASTER SERIES**

CODE	DESCRIPTION	PAGE
15/16	STAINLESS SERIES – 350 LB	9
S7/S8/S9	STAINLESS SERIES – 350 LB	16
73/74/7T	STAINLESS SERIES – 350 LB	22
MD/MT/MV	MT/MD/MV Stainless Caster Series - 350LB	28
RZ/RT/RB	RZ/RT/RB Stainless Casters - 350lb	33
B1/B2/B3	B1/B2/B3 Highly Polished Stainless Steel Casters - 1250LB	38
31/32/TS	STAINLESS SERIES – 1250 LB	44
S5/S6	STAINLESS SERIES – 1250 LB	49
4S	STAINLESS MODULAR SERIES – 1500 LB	54
SS Floor Locks	Stainless Steel Floor Locks	59
S57/S58	STAINLESS HEAVY DUTY FORGED SERIES – 6,000 LB	60
S61/S62	STAINLESS HEAVY DUTY KINGPINLESS SERIES – 7,000 LB	62
SS LV - Leveling Series	Stainless LV-LEVELING SERIES	64
Conductive Wheels	CONDUCTIVE STAINLESS WHEELS	65

2 - WHEEL TYPE

CODE	Name or Wheel Type
SR	SOFT TREAD SOLID RUBBER
HR	SOLID HARD RUBBER
RK	GRAYROK
NR	RUBBER ON NYLON
RD	RODIE
SF	SUPER-SOFT
CR	CUSHION RIDE
BC	DURA-CUSHION
RA	RUBBER ON ALUMINUM
RS	CAST IRON MOLD-ON RUBBER
RH	SUPREME RUBBER
LP	LOW PROFILE MOLD-ON RUBBER
EN	NEO-ENERGIZER
CN	CONDUCTIVE THERMO RUBBER
CT	CONDUCTIVE SOLID RUBBER WHEELS
EL	ELEMENT
NM	NOMADIC
TP	THERMO-PRO
PP	POLY-PRO
PM	POLYMADIC
MU	POLYON MAXROK
PR	POLYON-C
CP	CHAMPION
PA	POLYON-AL
PU	POLYON
RP	POLYFLEXON



UA	POLYFLEXON
UD	D-POLYON
UX	SUPER ELASTOMER
EX	ULTRA-POLY
PX	TITAN POLYMER
SW	ENERGY SAVER POLYON
SU	DURALASTOMER
SX	ELASTOMER
HU	ERGOLASTOMER
UN/US	WELDED DISC™ POLYURETHANE
DW	DUAL-WHEEL
PO/HP	POLYOLEFIN
MA	MAXROK™
NY	NYLON
NX	IRONMAN
ET	ELITE
PH	PHENOLIC
HI	ROKHARD
GN	BRIMSTONE
OV	EPOXY WHEELS
HT	HIGH-TEMP PHENOLIC
BF/SL	STEROLLIZER
FP	FULL PNEUMATIC TIRES
SN	SEMI-PNEUMATIC TIRES WITH METAL HUB
FF	FOAM-FILLED PNEUMATIC TIRES
ER	TIRES™ EVER-ROLL
LS	XTREME WHEEL
RT	ELASTORIDE
SN	TIRES™ ECO-RUBBER
PC/PS	PALLET JACK
BR	BOGEY AND NOSE ROLLERS
SS	SEMI-STEEL
HS	SEMI-STEELHEAVY-DUTY
SI	SINTERED IRON
DS	DUCTILE STEEL WHEELS
CD	ENERGY SAVER DUCTILE
FS	ENERGY SAVER DUCTILE
MV	DROP-FORGED STEEL
VG	V-GROOVE™ MAXROK
DV	DUCTILE V-GROOVE
FV/SV	FORGED AND SOLID STEEL V-GROOVE



3 - WHEEL DIAMETER

Code	Diameter
16	1-5/8" OR 16"
20	2"
25	2-1/2"
30	3"
31	3"
34	3-1/4"
35	3-1/2"
40	4"
4H	4"
4Z	4"
50	5"
54	5"
5H	5"
60	6"
61	6"
65	6"
66	6"
80	8"
81	8"
85	8"
89	8"
10	10"
1A	10"
12	12"
14	14"
16	1-5/8" OR 16"
18	18"
20	20"

4 - WHEEL WIDTH

Code	Measurement
0	3/4"
A	13/16"
B	7/8"
C	15/16"
D	1"
E	1-3/4"
F	1-1/4" W/1-15/16" HL
G	1-1/4"
H	1-1/2"
I	1-13/16"
J	2"
K	2-1/2"
L	3"
M	3-1/2"
N	4"
O	5"
P	1-5/8"
Q	2-1/2" W/ 3-1/4" HL
R	1-1/4" W 1-13/16" HL
S	PHENOLIC STRAIGHT SIDED
T	2" STRAIGHT SIDE
V	1-3/8"
U	2-3/4"
W	11/16"
V	1-3/8"
S	1-1/2" TREAD WIDTH, 1-1/2" HL

5 - WHEEL COLOR

Code	Color	Code	Color
A	BLACK/GRAY	O	ORANGE HIGH TEMPERATURE
B	BLACK	P	PURPLE/GRAY
C	BLACK/BLACK	P	GRAY PU/BLACK/CROWN
C	CENTERED HUBPNEUMATIC	Q	BROWN
D	RED/GRAY	R	RED
E	WHITE	S	SILVER-STEEL
F	BLACK/BRASS	S	ROYAL BLUE/GRAY
F	DARK BLUE/GRAY	T	GRAY/BEIGE/FLAT
G	DARK GRAY/WHITE	T	7/8 GROOVE
H	GRAY/BLACK	U	BLUE/BLACK
I	GRAY/GRAY	V	RED/SILVER
J	WHITE/DONUT	V	1-3/4 V GROOVE
K	RED/BLACK	W	GRAY/GRAY OFFSET
L	BLUE	W	RED/WHITE
M	MAROON	W	1-3/8 GROOVE
N	GREEN	X	GRAY/DONUT
O	ORANGE	Y	GRAY/BEIGE/DONUT
O	ORANGE PNEU. OFFSET HUB	Z	BLACK/CROWN



6 - BEARING OPTIONS

B5	Bronze Bearing	2pc3/4 X 1-3/16
B1	Bronze Bearing	3/4 X 1-3/16 X 2-3/16
B8	Bronze Bearing	1" x 1-15/16" x 3-1/4"
B2	Bronze Bearing	SS 6202 Substitutue 1/2" I.D.
12	Delrin	1-pc - 1/2" x 1-3/16" x 2-3/16"
55	Delrin	2pc - 3/8" x 1-1/8"
57	Delrin	2pc- 3/4" x 1-3/16"
58	Delrin	1pc - 1" x 1-15/16" x 2-3/4"
5A	Delrin	2PCS- 1/2" x 1-1/8"
82	Plain Bore	3/8" ID
90	Plain Bore	1/2" Plain bore w/ Delrin bushing
97	Plain bore	1/2" plain bore w/ S.S. T.H. to 3/8"
9S	Plain Bore	1/2" Plain bore w/ S.S. bushing
44	Precision Brg	3/8" I.D. w/ full TG
47	Precision Brg	3/8" I.D. w/ small TG
A3	S.S. B. Brg	Customized BRG for US wheel
61	S.S. Prec. B. Brg	SS6201, Spanner to 3/8"
72	S.S. Prec. B. Brg	SS6203, SS T.H. to 1/2"
2S	S.S. Prec. B. Brg	2PC - 3/8" x 1-1/8"
3S	S.S. Prec. B. Brg	SS 6203, SS T.H. to 3/4"
4S	S.S. Prec. B. Brg	3/8" I.D. w/ full TG
6S	S.S. Prec. B. Brg	2pc - Flanged 1/2" x 1-3/16"
P4	S.S. Prec. B. Brg	2PC- 3/8" x 1-1/8" w/ Epoxy cap for heat insolation
S2	S.S. Prec. B. Brg	SS 6202, W/ SS Bushing to 1/2"
S4	S.S. Prec. B. Brg	SS 6204, W/ S.S. T.H. to 1/2"
S5	S.S. Prec. B. Brg	SS 6205, W/ S.S. T.H. to 3/4"
S6	S.S. Prec. B. Brg	SS 6206, w/ Alu. T.H. to 3/4"
41	S.S. Roller	1" x 1-15/16" x 3"

7 - CASTER FASTENING PATTERN - PLATE

Code	Plate Dimension	Bolt Hole Patter	Mount. Bolt
01	1-1/4 X 2-1/16	13/16 X 1-9/16	3/16"
P4	1-1/2 X 1-1/2	1 X 1	7/32"
09	1-1/2 X 2-1/8	15/16 X 1-5/8	3/16"
8S	1-1/2 X 2-12	1 X 2	1/4"
00	1-1/2 X 2-21/32	15/16 X 2-1/8	1/4"
05	1-3/4 X 3	1 X 2-1/4	1/4"
08	1-3/4 X 3	1 X 2-3/16 TO 2-5/16	5/16"
02	1-7/8 X 2-9/16	15/16 X 2-1/8	1/4"
P5	2-1/16 X 2-9/16	1-5/8 X 2	1/4"
03	2-1/4 X 4-7/16	1-1/16 X 3-1/2	1/4"
04	2-1/4 X 5-1/8	1-3/16 X 4	1/4"
P2	2-3/8 X 2-3/8	1-1/2 X 1-1/2 TO	5/16"
06	2-3/8 X 3-5/8	1-3/4 X 2-7/8 TO 3	5/16"
07	2-5/8 X 3-11/16	1-3/4 X 3	1/4"
14	3-1/4 X 4-5/8	2-3/8 X 3-3/8	5/16"
16	3-1/2 X 3-1/2	2-5/8 X 2-5/8 TO 2-3/4 X 2-3/4	5/16"
U1	3-1/2 X 3-1/2	1-3/4 X 2-7/8 AND 2-7/8 X 2-7/8	5/16"
15	3-1/4 X 6-1/4	1-3/4 X 5	3/8"
MS	3-1/8 X 3-3/4	1-5/8 X 3 TO 2-5/16 X 3-1/8	5/16"
12	3-1/8 X 4-1/8	2-3/8 X 3-3/8	1/4"
11	3-1/8 X 4-1/8	1-3/4 X 2-15/16 TO 2-3/8 X 3-3/8	3/8"
13	3-3/4 X 4-1/2	2-5/8 X 3-5/8 TO 3 X 3	3/8"
P3	3-3/8 X 4-1/8	2-1/8 X 2-7/8 TO 2-5/8 X 3-3/8	5/16"
17	4 X 4-1/2	2-5/8 X 3-5/8 TO 3 X 3	3/8"
18	4 X 5	3 X 4	1/4"
19	4-1/2 X 6-1/4	2-7/16 X 4-15/16 TO 3-3/8 X 5-1/4	1/2"
A7	4-3/8 X 3-13/16	2-5/8 X 3-5/8 TO 3 X 3	3/8"
20	5 X 5-1/2	4-1/8 X 4-1/2	3/8"
25	5-1/4 X 7-1/4	3-3/8 X 5-1/4 TO 4-1/8 X 6-1/8	1/2"
P1	5-15/16 X 6-11/16	4-1/8 X 5-1/2	1/2"
29	6 X 7-1/2	4-1/2 X 6 TO 4-1/8 X 6-1/8	1/2" OR 9/16"
30	6-1/4 X 7-1/2	4-1/2 X 6 TO 4-1/8 X 6-1/8	1/2" OR 9/16"
10	78MM X 99MM	60MM X 80MM	5/16"
21	79MM X 104MM	60MM X 86MM TO 88MM	5/16"
45	8-1/2 X 8-1/2	7 X 7	5/8"
DP	DIAMOND 3-1/32 X 4-3/8	3-1/2	7/16"
99	PENTAGON PLATE 2 X 5-1/2 X 5-1/2 X 2		5/16"
A2	3-1/8 X 4-1/8		
ZZ	HOLLOW KINGPIN	1/2" DIAMETER	



7 - CASTER FASTENING PATTERN STEMS					
THREADED STEMS (UNC)		GRIP RING STEMS		ADAPTER STEMS	
Code	Stem	Code	Stem	Code	Stem
83	1/4 - 20 X 1/2	54	ROUND 3/8 X 1 - 1 RING	71	WITH ADAPTER ADP7134
32	5/16 - 18 X 3/4	F9	ROUND 7/16 X 3/4 - 1 RING	72	WITH ADP7278
31	5/16 - 18 X 1	53	ROUND 7/16 X 7/8 - 1 RING	7B	WITH ADP7992
34	5/16 - 18 X 1-1/2	9A	ROUND 7/16 X 7/8 - 1 RING	73	WITH ADP7310
63	3/8 - 16 X 1/2	90	ROUND 7/16 X 1-3/16 - 1 RING	7A	WITH ADP7A16
60	3/8 - 16 X 3/4	91	ROUND 7/16 X 1-3/8 - 1 RING	74	WITH ADP7418
61	3/8 - 16 X 1	49	ROUND 7/16 X 1-3/4 - 1 RING	78	WITH ADP7814
58	3/8 - 16 X 1-1/4	97	ROUND 7/16 X 2 - RING	75	WITH ADP7538
64	3/8 - 16 X 1-3/8	96	ROUND 13/16 X 1-3/4 - 1 RING	76	WITH ADP7615
62	3/8 - 16 X 1-1/2	93	ROUND 13/16 X 2-3/16 - 2 RING	77	WITH ADP7717
6A	3/8 - 16 X 2	94	ROUND 27/32 X 2-1/2 - 1 RING	R1	WITH ADS7134
3A	7/16 - 14 X 3/4	95	ROUND 0.846 X 2-3/16 - 1 RING	R2	WITH ADS7278
33	7/16 - 14 X 1-1/2	92	ROUND 5/8 X 2-3/16 2 RING	R3	WITH ADS7310
7A	7/16 - 14 X 1-3/4	48	ROUND 0.865 X 2-1/4 - 2 RINGS	R4	WITH ADS7418
79	7/16 - 14 X 2-1/4	G4	ROUND 7/8 X 1.875 - 1 RING	R5	WITH ADS7538
C6	7/16 - 14 X 5	85	ROUND 1 X 2-3/16 - 2 RINGS	R6	WITH ADS7615
6S	1/2 - 13 X 3/8	A6	ROUND 1-1/8 X 2-3/16 - 2 RINGS	R7	WITH ADS7717
35	1/2 - 13 X 1/2	22	ROUND 1.25 X 2-3/16 - 2 RINGS	U2	WITH ADR7278
66	1/2 - 13 X 3/4	23	ROUND 1-3/8 X 2-3/16 - 2 RINGS	U5	WITH ADR7538
67	1/2 - 13 X 1	43	SQUARE 9/16 X 2-15/16, 2 X 5/16" CRX DRL	D2	WITH ADT7278
68	1/2 - 13 X 1-1/2	51	OCTAGON 3/4 X 2 W/3 X 1/4" CRX DRL	T2	WITH ATR7278
6M	1/2-13 X 1-9/16	52	OCTAGON 3/4 X 2-3/16 W/3 X 1/4" CRX DRL	S2	WITH ASP7278
59	1/2 - 13 X 1-3/4	55	SQUARE 7/8 X 2 CRX SEC. 1.087" 3 CRX DRILL	S3	WITH ASP7310
69	1/2 - 13 X 2	56	OCTAGON 7/8 X 2 CRX SEC. 0.983, 3 CRX DRILL	S6	WITH ASP7615
6B	1/2 - 13 X 2-1/2	42	OCTAGON 7/8 X 2 W/ 5/16 CRX DRL	86	PIPE THREAD 3/4-10 X 1-1/4 FOR PIPE O. D. 1"
70	1/2 - 13 X 2-3/4	41	OCTAGON 0.875 X 2-1/4 - 1 RING	L1	LADDER STEM 9/16 X 2 BASE, 5/16 -18 X 3-3/4 UPPER
C4	1/2 - 13 X 2-3/4	40	SQUARE 7/8 X 3.5 -2 RINGS	SC	1/2 - 13 X 7/8 W/ KEY LOCK BASE FOR SHOPPING CART
C8	1/2 - 13 X 3-1/8	D5	ROUND 1 X 2.5, 3/8" CRX DRL 1" FROM BOTTOM E12	LM	0.70" X 1.72 W/ TWO 0.27" HOLE, 0.88" IN BETWEEN, FITS 7/8" ROUND TUBULAR CARTS
C1	1/2 - 13 X 4	50	ROUND 7/8 X 1-7/8, CRX DRL 29/32 UP	L2	PLAIN STEM 3/4 X 4
36	1/2 - 20 X 2-1/4	57	SS OCTAGON 3/4 X 2 W/3 1/4" CRX DRL	L3	PLAIN STEM 7/8 X 4
80	5/8 -11 X 1	G3	SS SQUARE 7/8 X 3-1/2 - 2 RINGS	L4	PLAIN STEM 1 X 4
89	5/8 -11 X 1-1/4	S7	SS ROUND 1-18 X 2-3/16 - 2 RINGS CROSS DRILLED STEM	L5	PLAIN STEM 1-3/8 X 4
81	5/8 -11 X 1-3/4	43	SQUARE 9/16 X 2.92, 5/16" CRX DRL,		
38	5/8 - 11 X 2	51	OCTAGON 3/4 X 2 W/3 1/4" CRX DRL		
C5	5/8 - 11 X 2.25	52	OCTAGON 3/4 X 2-3/16 W/3 1/4" CRX DRL		
39	5/8 - 11 X 2-11/16	55	SQUARE 7/8 X 2 CRX SEC. 1.087" 3 CRX DRILL		
C2	5/8 - 11 X 4	56	OCTAGON 7/8 X 2 CRX SEC. 0.983, 3 CRX DRILL		
88	3/4 - 10 X 1	42	OCTAGON 7/8 X 2 W/ 5/16 CRX DRL		
F8	3/4 - 16 X 1 (UNF)	41	OCTAGON 0.875 X 2-1/4 - 1 RING		
8Q	3/4-10 X 1-1/4	40	SQUARE 7/8 X 3.5 -2 RINGS		
87	3/4 - 10 X 1-3/4	D5	ROUND 1 X 2.5, 3/8" CRX DRL 1" FROM BOTTOM E12		
T1	3/4 - 10 X 2-1/2	50	ROUND 7/8 X 1-7/8, CRX DRL 29/32 UP		
C9	3/4 -10 X 3	57	SS OCTAGON 3/4 X 2 W/ 1/4" 3 CRX DRL		
84	3/4 - 10 X 4	7R	SS ROUNDED 3/4 X 2 W/ 17/16 3 CRX DRL		
S7	3/4 - 10 X 4.25	G3	SS SQUARE 7/8 X 3-1/2 - 2 RINGS		
37	3/4-10 X 5.5 (2" THREAD)	S7	SS ROUND 1-18 X 2-3/16 - 2 RINGS		
C3	3/4 - 10 X 6				
T2	1 - 8 X 2-1/4				
C7	1 - 8 X 4				
D6	1 -12 X 2.5				
89	M12 X 3/4 (METRIC)				
65	M12 X 2 (METRIC)				
M7	M24 X 4 (METRIC)				
S1	SS 1/2 - 13 X 4				
S2	SS 5/8 - 11 X 4				
S5	SS 3/4 - 10 X 10				
S6	SS 3/4 - 10 X 2				
S3	SS 3/4 - 10 X 6				
S4	SS 3/4 - 10 X 8				




8 - CASTER OPTIONS	
Code	Options
P3	4PSL AND PLASTIC T. G.
P4	4PSL AND TOE GUARD
XY	BLACK OXIDE
NY	CANTILEVER DUAL WHEEL
YYM	CHROME
DY	DUAL WHEEL
F4	FACE CONTACT BRAKE AND TOE GUARD
FP4	FACE CONTACT BRAKE, 4PSL AND TOE GUARD
QY	FOOD GRADE GREASE
1Y	LOW TEMP GREASE
2Y	NEOPRENE RACEWAY SEAL
YYN	NICKEL
IY	NO. SEAL, NO. GREASE, NO ZERK
3Y	PLASTIC T. G.
PH	PLASTIC TKP
L3	RACEWAY SEAL AND PLASTIC T. G.
5Y	SCREWDRIVER GROOVE AT STEM
OY	SINGLE POSITIONAL LOCK AT TRAILING
99	SS SPANNER, 4PSL, PLASTIC GUARD, SS BRAKE
T3	TLB AND PLASTIC T. G.
TP3	TLB, 4PSL AND PLASTIC T. G.
4Y	TOE GUARD
UY	UNPLATED TOP PLATE
UU	UNPLATED WHOLE CASTER
VN	VITON SEAL
PY	W/ 4 POSITIONAL LOCK
AY	W/ A CAM BRAKE
AL	W/ A CAM BRAKE AND RACEWAY SEAL
CY	W/ CAM BRAKE
CL	W/ CAM BRAKE AND RACEWAY SEAL
FY	W/ FACE CONTACT BRAKE
JY	W/ FOOT OPERATED 4 POSITIONAL LOCK
KY	W/ HIGHT TEMP GREASE
KK	W/ HIGHT TEMP GREASE AND ZERK
KL	W /HI-TEMP SEAL AND ZERK
BY	W/ LOWER RACEWAY CAP
LY	W/ RACEWAY SEAL
SY	W/ SIDE LOCK
SP	W/ SIDE LOCK AND 4PSL
SL	W/ SIDE LOCK AND RACEWAY SEAL
HY	W/ TECH LOCK
GY	W/ THREAD GUARDS
RY	W/ THUMB SCREW BRAKE
TY	W/ TOP LOCK BRAKE
TL	W/ TOP LOCK BRAKE AND RACEWAY SEAL
VY	W/ VERTICAL BRAKE
EY	W/ ZERK AND RACEWAY SEAL
ZY	W/ ZERK AXLE
ZZ	W/ ZERK ON RACEWAY, ZERK AXLE, NO SEAL
YC	YELLOW ZINC CHROMED



15/16 Stainless Caster - 350LB

- Constructed with S304 Stainless Steel
- Dual ball bearing raceway
- 3/8" axle and nut
- Electrolytic shining finish
- Economically efficient for most applications
- Large selection of wheels and options for various application
- Different brake options available
- NSF and ROHS Compliant
- High-Temp grease available upon request(K)

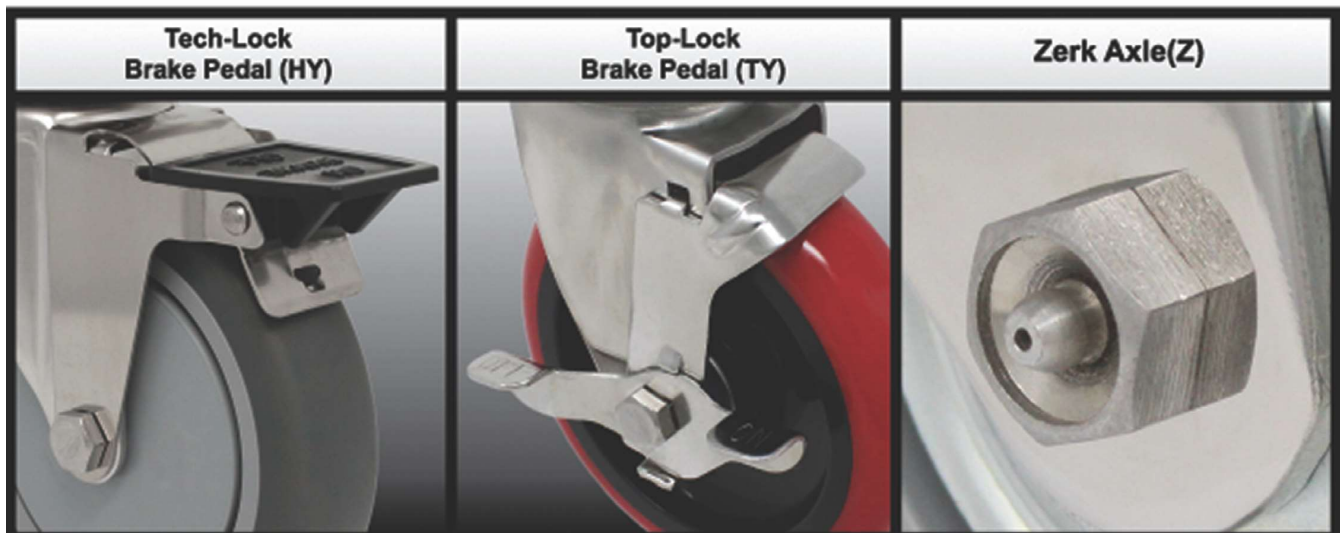



15/16 Stainless Caster - 350LB

Fastening Options (Replace ** in part number with desired plate or stem code)

Plate Code	Overall Size	Bolt Hole Pattern	Mounting Bolt Size
06	2-3/8 x 3-5/8	1-3/4 x 2-7/8 slotted to 3	5/16
X6	2-3/8 x 3-5/8	1-3/4 x 3 to 2-3/16 x 2-3/4	5/16
11	3-1/8 x 4-1/8	1-3/4 x 2-15/16 to 2-3/8 x 3-3/8	3/8
17	4 x 4-1/2	2-5/8 x 3-5/8 to 3 x 3	3/8

Order the modular stem installed with code - or uninstalled by part #

Permanently attached Stem

Stem Code	Size	Modular Stem Part #	Stem Type	Stem Code	Size	Stem Type
ZZ	1/2		Hollow Kingpin-No Fastener	91	7/16 x 1-3/8	Grip Ring
61	3/8 - 16 x 1	S7STS61	Threaded	68	1/2 - 13 x 1-1/2	Threaded
S1	1/2 - 13 x 4	S7STTS1		70	1/2 - 13 x 2-3/4	
S2	5/8 - 11 x 4	S7STTS2		71	.720 - .851	Rounded Expandable Adaptor
E8	5/8-18 x 1-1/2"	S7STTE8				
S6	3/4 - 10 x 2	S7STTS6		7B	.920 - .980	
S7	3/4 - 10 x 4	S7STTS7		72	.852 - .927	
S3	3/4 - 10 x 6	S7STTS3		73	.928 - 1.029	
S4	3/4 - 10 x 8	S7STTS4		7A	1.020 - 1.100	
S5	3/4 - 10 x 10	S7STTS5		74	1.030 - 1.14	
91	7/16 x 1-3/8	S7STG91	Grip Ring	75	1.360 - 1.425	Rounded Expandable Adaptor w/ stainless knurl nuts
97	7/16 x 2	S7STG97		76	1.426 - 1.589	
95	.846 x 2-3/16	S7STG91		77	1.790 - 1.850	
57	3/4 x 2	S7STR57	Rounded w/ 3 cross drilled holes	78	1.178 - 1.303	
82	1-1/8 x 2-3/16	S7STG82	Rounded Grip Ring (2 rings)	72S	.852 - .927	
51	3/4 x 2	S7STS51	Squared w/ 3 cross drilled holes	73S	.928 - 1.029	Expandable Adaptor for squared tubing
42	7/8 x 2			76S	1.426 - 1.589	
41	.865 x 2-1/4	S7STO41	Octagon w/ Grip Ring	R1	.720 - .851	
G3	7/8 x 3-1/2	S7STGG3	Squared Grip Rings (2 rings)	R2	.852 - .927	
				R3	.928 - 1.029	
				R4	1.030 - 1.140	
				R5	1.360 - 1.425	
				R6	1.426 - 1.589	
				R7	1.790 - 1.850	

Size	Overall Height	Swivel Radius
3	4-1/8	3
3-1/2	4-5/8	3-1/16
4	5-1/8	3-1/2
4A	5	3-7/16
5	6-1/8	4

*Reduce Overall Height 1/8" for stem casters

Only Superior Casters are Durable! 16



15/16 Stainless Caster - 350LB

WHEELS



TP-Thermo-Pro™					PP-Poly-Pro™								
A44	C44	I44	T83	Y83	A83	B82	D44	I44	K42	P47	P42	S44	W42

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Swivel Caster Part #	Rigid Caster Part #
3"	1-1/4"	Yoke only				15ZZ30GZ82**YY	16ZZ30GZ82**YY
		Soft Rubber	300		Plain	15SR30GB82**YY	16SR30GB82**YY
		Thermo-Pro™	210	T,Y	^Precision	15TP30GI44**YY	16TP30GI44**YY
						15TP30G+47**YY	16TP30G+47**YY
					SS Sleeve	15TP30G+9S**YY	16TP30G+9S**YY
					SS Prec. BB	15TP30GI4S**YY	16TP30GI4S**YY
					Plain	15TP30GI82**YY	16TP30GI82**YY
		Nomadic™	300	I,L	Delrin	15NM30G+5A**YY	16NM30G+5A**YY
					SS Prec. BB	15NM30G+4S**YY	16NM30G+4S**YY
		Element™	210		Delrin	15EL30GI5A**YY	16EL30GI5A**YY
		Poly-Pro™	300	A,D,I,K,S	^Precision	15PP30G+44**YY	16PP30G+44**YY
				T,Y	^Precision	15PP30G+47**YY	16PP30G+47**YY
					SS Sleeve	15PP30G+9S**YY	16PP30G+9S**YY
				K,W,P	SS BB	15PP30G+2S**YY	16PP30G+2S**YY
					Delrin	15PP30G+55**YY	16PP30G+55**YY
					SS Prec. BB	15PP30GI4S**YY	16PP30GI4S**YY
		Polymadic™	300		Delrin	15PM30GM5A**YY	16PM30GM5A**YY
		DuraLastomer™	300		SS Sleeve	15SU30GL9S**YY	16SU30GL9S**YY
		Hard Rubber	275		Plain	15HR30GB82**YY	16HR30GB82**YY
		Polyolefin	250	B,Z	Plain	15PO30G+82**YY	16PO30G+82**YY
			300	J,Z	SS Sleeve	15PO30G+9S**YY	16PO30G+9S**YY
			300		SS BB	15PO30GZ2S**YY	16PO30GZ2S**YY
		H.D. Polyolefin	250	B,E	Plain	15HP30G+82**YY	16HP30G+82**YY
		Nylon	300		SS Sleeve	15NY30GE9S**YY	16NY30GE9S**YY
					SS Prec. BB	15NY30GE4S**YY	16NY30GE4S**YY
		Phenolic	300		SS Top Hat	15PH30GB97**YY	16PH30GB97**YY
		H.T. Phenolic	200		SSTop Hat	15HT30GQ97**YY	16HT30GQ97**YY
		BrimStone™	350		SS Top Hat	15GN30GQ97**YY	16GN30GQ97**YY
	1-1/2"	Phenolic	350		SS Sleeve	15PH30HB9S**YY	16PH30HB9S**YY

17 Only Superior Casters are Durable!



15/16 Stainless Caster - 350LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Swivel Caster Part #	Rigid Caster Part #
3-1/2	1-1/4"	Yoke only				15ZZ35GZ82**YY	16ZZ35GZ82**YY
		Soft Rubber	300		Plain	15SR35GB82**YY	16SR35GB82**YY
		Thermo-Pro™	230	T,Y	^Precision	15TP35GI44**YY	16TP35GI44**YY
						15TP35G+47**YY	16TP35G+47**YY
					SS Sleeve	15TP35G+9S**YY	16TP35G+9S**YY
					Plain	15TP35GI82**YY	16TP35GI82**YY
		Nomadic™	300	I,L	Delrin	15NM35G+5A**YY	16NM35G+5A**YY
		Element™	220		Delrin	15EL35GI5A**YY	16EL35GI5A**YY
		Poly-Pro™	300	A,D,I,K,S	^Precision	15PP35G+44**YY	16PP35G+44**YY
				T,Y		15PP35G+47**YY	16PP35G+47**YY
					K,W,P	SS Sleeve	15PP35G+9S**YY
				SS BB		15PP35G+2S**YY	16PP35G+2S**YY
				Delrin		15PP35G+55**YY	16PP35G+55**YY
					SS Prec. BB	15PP35GI4S**YY	16PP35GI4S**YY
		Polymadic™	325		Delrin	15PM35GM5A**YY	16PM35GM5A**YY
		Stainless Disc	250		Ball	15US35GLA3**YY	16US35GLA3**YY
		Hard Rubber	300		Plain	15HR35GB82**YY	16HR35GB82**YY
		Polyolefin	300	J,Z	Plain	15PO35G+82**YY	16PO35G+82**YY
		Nylon	325		Plain	15NY35GE82**YY	16NY35GE82**YY
					SS Prec. BB	15NY35GE4S**YY	16NY35GE4S**YY
		Phenolic	350		SS Top Hat	15PH35GB97**YY	16PH35GB97**YY

Notes



15/16 Stainless Caster -350LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Swivel Caster Part #	Rigid Caster Part #
4"	1-1/4"	Yoke only				15ZZ40GZ82**YY	16ZZ40GZ82**YY
		Soft Rubber	350		Plain	15SR40GB82**YY	16SR40GB82**YY
		Thermo-Pro™	250	T,Y	^Precision	15TP40GI44**YY	16TP40GI44**YY
						15TP40G+47**YY	16TP40G+47**YY
					SS Sleeve	15TP40G+9S**YY	16TP40G+9S**YY
					SS Prec. BB	15TP40GI4S**YY	16TP40GI4S**YY
					Plain	15TP40GI82**YY	16TP40GI82**YY
		Nomadic™	300	I,L	Delrin	15NM40G+5A**YY	16NM40G+5A**YY
					SS Prec. BB	15NM40G+4S**YY	16NM40G+4S**YY
		Element™	240		Delrin	15EL40GI5A**YY	16EL40GI5A**YY
		Poly-Pro™	350	A,D,I,S,C	^Precision	15PP40G+44**YY	16PP40G+44**YY
				T,Y		15PP40G+47**YY	16PP40G+47**YY
				K,W,P	SS Sleeve	15PP40G+9S**YY	16PP40G+9S**YY
					SS BB	15PP40G+2S**YY	16PP40G+2S**YY
					Delrin	15PP40G+55**YY	16PP40G+55**YY
						SS Prec. BB	15PP40GI4S**YY
		Polymadic™	350		Delrin	15PM40GM5A**YY	16PM40GM5A**YY
		Stainless Disc	270		Ball	15US40GLA3**YY	16US40GLA3**YY
		Conductive	250		^Precision	15CN40GH44**YY	16CN40GH44**YY
					Precision	15CN40GH4S**YY	16CN40GH4S**YY
		SteROLLizer™	300		SS Top Hat	15BF40GC97**YY	16BF40GC97**YY
						15SL40GC97**YY	16SL40GC97**YY
		DuraLastomer™	350		SS Sleeve	15SU40GL9S**YY	16SU40GL9S**YY
		Hard Rubber	350		Plain	15HR40GB82**YY	16HR40GB82**YY
		Polyolefin	300	B,Z	Plain	15PO40G+82**YY	16PO40G+82**YY
			350	J,Z	SS Sleeve	15PO40G+9S**YY	16PO40G+9S**YY
			350		SS BB	15PO40GZ2S**YY	16PO40GZ2S**YY
		H.D. Polyolefin	350	B,E	Plain	15HP40G+82**YY	16HP40G+82**YY
		Nylon	350		SS Sleeve	15NY40GE9S**YY	16NY40GE9S**YY
					SS Prec. BB	15NY40GE4S**YY	16NY40GE4S**YY
		Phenolic	350		SS Top Hat	15PH40GB97**YY	16PH40GB97**YY
		H.T. Phenolic	250		SS Top Hat	15HT40GQ97**YY	16HT40GQ97**YY
		BrimStone™	300		SS Top Hat	15GN40GQ97**YY	16GN40GQ97**YY
	1-1/2"	H.T. Phenolic	350		SS Sleeve	15HT40HQ9S**YY	16HT40HQ9S**YY
		BrimStone™	350		SS Sleeve	15GN40HQ9S**YY	16GN40HQ9S**YY
		Epoxy	350		SS BB	15OV40HQP4**YY	16OV40HQP4**YY
					SS Sleeve	15OV40HQ9S**YY	16OV40HQ9S**YY
		SteROLLizer™	350		SS Prec. BB	15BF40HC61**YY	16BF40HC61**YY
						15SL40HC61**YY	16SL40HC61**YY



15/16 Stainless Caster - 350LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Swivel Caster Part #	Rigid Caster Part #
4"	1-1/4"	Yoke only				15ZZ4AGZ81**YY	16ZZ4AGZ81**YY
		Soft Rubber	350		Plain	15SR4AGB82**YY	16SR4AGB82**YY
		Thermo-Pro™	250	T,Y	^Precision	15TP4AGI44**YY	16TP4AGI44**YY
						15TP4AG+47**YY	16TP4AG+47**YY
					SS Sleeve	15TP4AG+9S**YY	16TP4AG+9S**YY
					SS Prec. BB	15TP4AGI4S**YY	16TP4AGI4S**YY
					Plain	15TP4AGI82**YY	16TP4AGI82**YY
		Nomadic™	300	I,L	Delrin	15NM4AG+5A**YY	16NM4AG+5A**YY
					SS Prec. BB	15NM4AG+4S**YY	16NM4AG+4S**YY
		Element™	240		Delrin	15EL4AGI5A**YY	16EL4AGI5A**YY
		Poly-Pro™	350	A,D,I,S,C	^Precision	15PP4AG+44**YY	16PP4AG+44**YY
						15PP4AG+47**YY	16PP4AG+47**YY
				T,Y	SS Sleeve	15PP4AG+9S**YY	16PP4AG+9S**YY
					SS BB	15PP4AG+2S**YY	16PP4AG+2S**YY
				K,W,P	Delrin	15PP4AG+55**YY	16PP4AG+55**YY
					SS Prec. BB	15PP4AGI4S**YY	16PP4AGI4S**YY
		Polymadic™	350		Delrin	15PM4AGM5A**YY	16PM4AGM5A**YY
		Stainless Disc	270		Ball	15US4AGLA3**YY	16US4AGLA3**YY
		Conductive	250		^Precision	15CN4AGH44**YY	16CN4AGH44**YY
					Precision	15CN4AGH4S**YY	16CN4AGH4S**YY
		SteROLLizer™	300		SS Top Hat	15BF4AGC97**YY	16BF4AGC97**YY
						15SL4AGC97**YY	16SL4AGC97**YY
		DuraLastomer™	350		SS Sleeve	15SU4AGL9S**YY	16SU4AGL9S**YY
		Hard Rubber	350		Plain	15HR4AGB82**YY	16HR4AGB82**YY
		Polyolefin	300	B,Z	Plain	15PO4AG+82**YY	16PO4AG+82**YY
			350	J,Z	SS Sleeve	15PO4AG+9S**YY	16PO4AG+9S**YY
			350		SS BB	15PO4AGZ2S**YY	16PO4AGZ2S**YY
		H.D. Polyolefin	350	B,E	Plain	15HP4AG+82**YY	16HP4AG+82**YY
		Nylon	350		SS Sleeve	15NY4AGE9S**YY	16NY4AGE9S**YY
					SS Prec. BB	15NY4AGE4S**YY	16NY4AGE4S**YY
		Phenolic	350		SS Top Hat	15PH4AGB97**YY	16PH4AGB97**YY
		H.T. Phenolic	250		SS Top Hat	15HT4AGQ97**YY	16HT4AGQ97**YY
		BrimStone™	300		SS Top Hat	15GN4AGQ97**YY	16GN4AGQ97**YY
	1-1/2"	H.T. Phenolic	350		SS Sleeve	15HT4AHQ9S**YY	16HT4AHQ9S**YY
		BrimStone™	350		SS Sleeve	15GN4AHQ9S**YY	16GN4AHQ9S**YY
		Epoxy	350		SS BB	15OV4AHQP4**YY	16OV4AHQP4**YY
					SS Sleeve	15OV4AHQ9S**YY	16OV4AHQ9S**YY
		SteROLLizer™	350		SS Prec. BB	15BF4AHC61**YY	16BF4AHC61**YY
						15SL4AHC61**YY	16SL4AHC61**YY

Only Superior Casters are Durable! 20




15/16 Stainless Caster - 350LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Swivel Caster Part #	Rigid Caster Part #
5"	1-1/4"	Yoke only				15ZZ50GZ82**YY	16ZZ50GZ82**YY
		Neoprene Energizer™	300		SS Ball B.	15EN50VB2S**YY	16EN50GV2S**YY
					Delrin	15EN50VB55**YY	16EN50GV55**YY
		SteROLLizer™	300		SS Ball B.	15BG50VO2S**YY	16BG50VO2S**YY
		Soft Rubber	250		Plain	15SR50GB82**YY	16SR50GB82**YY
		Thermo-Pro™	300	T,Y	^Precision	15TP50GI44**YY	16TP50GI44**YY
						15TP50G+47**YY	16TP50G+47**YY
					SS Sleeve	15TP50G+9S**YY	16TP50G+9S**YY
					Delrin	15TP50GI5A**YY	16TP50GI5A**YY
					SS Prec. BB	15TP50GI4S**YY	16TP50GI4S**YY
				Nomadic™	325	I,L	Delrin
		SS Prec. BB	15NM50G+4S**YY				16NM50G+4S**YY
		Element™	250		Delrin	15EL50GI5A**YY	16EL50GI5A**YY
		Poly-Pro™	300	I,A,D,S	^Precision	15PP50G+44**YY	16PP50G+44**YY
				B		15PP50GB82**YY	16PP50GB82**YY
				T,Y		15PP50G+47**YY	16PP50G+47**YY
					SS Sleeve	15PP50G+9S**YY	16PP50G+9S**YY
				K,W,P	SS BB	15PP50G+2S**YY	16PP50G+2S**YY
					Delrin	15PP50G+55**YY	16PP50G+55**YY
					SS Prec. BB	15PP50GI4S**YY	16PP50GI4S**YY
		Polymadic™	350		Delrin	15PM50GM5A**YY	16PM50GM5A**YY
		Stainless Disc	300		Ball	15US50GLA3**YY	16US50GLA3**YY
		Conductive	275		^Precision	15CN50GH44**YY	16CN50GH44**YY
		DuraLastomer™	350		SS Sleeve	15SU50GL9S**YY	16SU50GL9S**YY
		Hard Rubber	350		Plain	15HR50GB82**YY	16HR50GB82**YY
		Polyolefin	350	B,Z	Plain	15PO50G+82**YY	16PO50G+82**YY
			350	J,Z	SS Sleeve	15PO50G+9S**YY	16PO50G+9S**YY
		H.D. Polyolefin	350	B,E	Plain	15HP50G+82**YY	16HP50G+82**YY
		Nylon	350		SS Sleeve	15NY50GE9S**YY	16NY50GE9S**YY
					SS Prec. BB	15NY50GE4S**YY	16NY50GE4S**YY
		Phenolic	350		SS Top Hat	15PH50GB97**YY	16PH50GB97**YY



S7/S8/S9 Stainless Total Lock Caster Series - 350LB

- Constructed with S304 Stainless Steel
- Electrolytic shining finish
- Dual ball bearing raceway
- High-Temp grease available upon request
- 3/8" axle and nut
- Economically efficient for most applications
- Large selection of wheels and options for various application
- NSF and RoHS Compliant

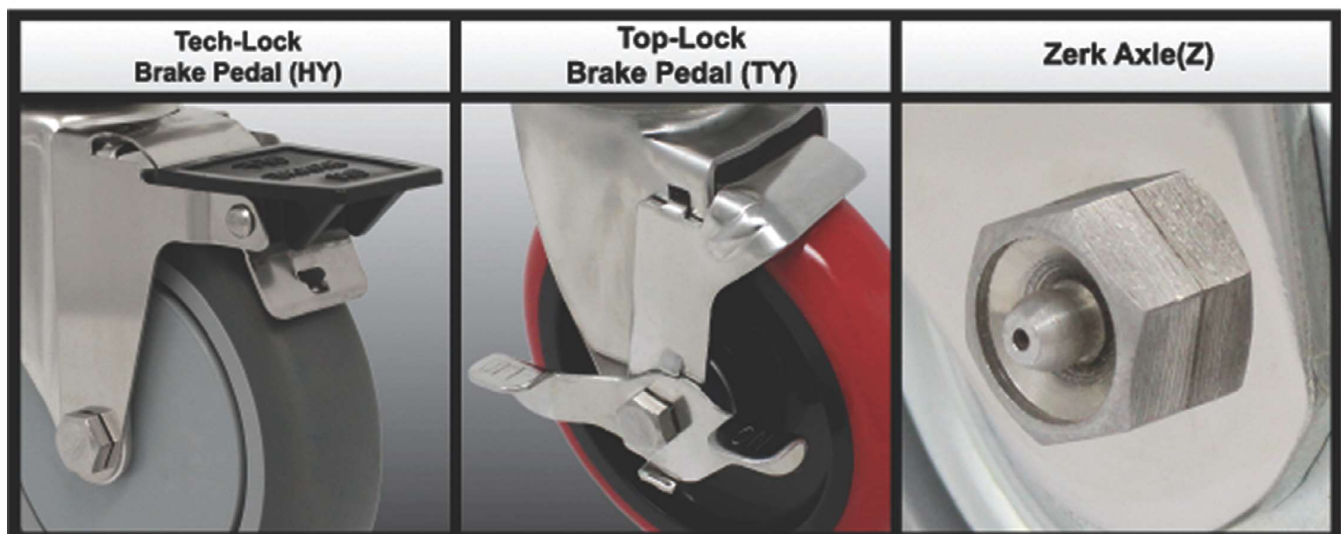


Only Superior Casters are Durable! 22



S7/S8/S9 Stainless Total Lock Caster Series - 350LB

Fastening Options (Replace ** in part number with desired plate or stem code)						
Plate Code	Overall Size		Bolt Hole Pattern	Mounting Bolt Size		
06	2-3/8 x 3-5/8		1-3/4 x 2-7/8 slotted to 3	5/16		
X6	2-3/8 x 3-5/8		1-3/4 x 3 to 2-3/16 x 3-3/4	5/16		
11	3-1/8 x 4-1/8		1-3/4 x 2-15/16 to 2-3/8 x 3-3/8	3/8		
17	4 x 4-1/2		2-5/8 x 3-5/8 to 3 x 3	3/8		
Order modular stem installed with code - or uninstalled by part #				Permanently attached Stem		
Stem Code	Size	Modular Stem Part #	Stem Type	Stem Code	Size	Stem Type
ZZ	1/2		Hollow Kingpin-No Fastener	91	7/16 x 1-3/8	Grip Ring
61	3/8 - 16 x 1	S7STS61	Threaded	95	.846 x 2-3/16	
S1	1/2 - 13 x 4	S7STTS1		67	1/2 - 13 x 1	Threaded
S2	5/8 - 11 x 4	S7STTS2		68	1/2 - 13 x 1-1/2	
E8	5/8-18 x 1-1/2"	S7STTE8				
S6	3/4 - 10 x 2	S7STTS6		70	1/2 - 13 x 2-3/4	
S7	3/4 - 10 x 4	S7STTS7		71	.720 - .851	Rounded Expandable Adaptor
S3	3/4 - 10 x 6	S7STTS3		7B	0.920 - 0.980	
S4	3/4 - 10 x 8	S7STTS4		72	.852 - .927	
S5	3/4 - 10 x 10	S7STTS5		73	.928 - 1.029	
97	7/16 x 2	S7STG97		Grip Ring	7A	1.020 - 1.100
57	3/4 x 2	S7STR57	Rounded w/3 cross drilled holes	74	1.030 - 1.14	
82	1-1/8 x 2-3/16	S7STG82	Rounded Grip Ring (2 rings)	75	1.360 - 1.425	
51	3/4 x 2	S7STS51	Square w/ 3 cross drilled holes	76	1.426 - 1.589	
42	7/8 x 2	S7ST042		77	1.790 - 1.850	
41	.875 x 2-1/4	S7STO41	Octagon w/ Grip Ring	78	1.178 - 1.303	
G3	7/8 x 3-1/2	S7STOG3	Square Grip rings(2 rings)	72S	.852 - .927	
				73S	.928 - 1.029	
				76S	1.426 - 1.589	
				R1	.720 - .851	
				R2	.852 - .927	
				R3	.928 - 1.029	
				R4	.1030 - 1.140	
				R5	1.360 - 1.425	
				R6	1.426 - 1.589	
				R7	1.790 - 1.850	

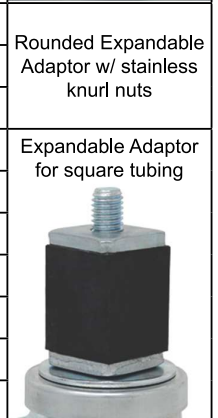

Size	Overall Height	Swivel Radius	
		S7	S9
3	4-1/4	4-1/4	2-13/16
3-1/2	4-3/4	4-1/4	3-1/16
4	5-1/4	4-1/4	3-5/16
5	6-1/4	4-1/4	3-7/8

*Reduce Overall Height 1/8" for stem casters



S7/S8/S9 Stainless Total Lock Caster Series - 350LB

WHEELS

																
																
																
TP-Thermo-Pro™				PP-Poly-Pro™												
A44	C44	I44	T83	Y83	A83	B82	D44	I44	K42	P47	P42	S44	W42			
																
Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock Caster Part #	Swivel Caster Part #		Rigid Caster Part #							
3"	1-1/4"	Yoke only				S7ZZ30GZ82**YY	S9ZZ30GZ82**YY		S8ZZ30GZ82**YY							
		Soft Rubber	300		Plain	S7SR30GB82**YY	S9SR30GB82**YY		S8SR30GB82**YY							
		Thermo-Pro™	210	T,Y	^Precision	S7TP30GI44**YY	S9TP30GI44**YY		S8TP30GI44**YY							
						S7TP30G+47**YY	S9TP30G+47**YY		S8TP30G+47**YY							
					SS Sleeve	S7TP30G+9S**YY	S9TP30G+9S**YY		S8TP30G+9S**YY							
					SS Prec. BB	S7TP30GI4S**YY	S9TP30GI4S**YY		S8TP30GI4S**YY							
		Nomadic™	300	I		Delrin	S7NM30G+5A**YY	S9NM30G+5A**YY		S8NM30G+5A**YY						
						SS Prec. BB	S7NM30G+4S**YY	S9NM30G+4S**YY		S8NM30G+4S**YY						
		Element™	210			Delrin	S7EL30GI5A**YY	S9EL30GI5A**YY		S8EL30GI5A**YY						
		Poly-Pro™	300	A,D,I,K,S	^Precision		S7PP30G+44**YY	S9PP30G+44**YY		S8PP30G+44**YY						
							S7PP30G+47**YY	S9PP30G+47**YY		S8PP30G+47**YY						
				T,Y		SS Sleeve	S7PP30G+9S**YY	S9PP30G+9S**YY		S8PP30G+9S**YY						
						SS BB	S7PP30G+2S**YY	S9PP30G+2S**YY		S8PP30G+2S**YY						
					K,W		Delrin	S7PP30G+55**YY	S9PP30G+55**YY		S8PP30G+55**YY					
						SS Prec. BB	S7PP30GI4S**YY	S9PP30GI4S**YY		S8PP30GI4S**YY						
		Polymadic™	300			Delrin	S7PM30GM5A**YY	S9PM30GM5A**YY		S8PM30GM5A**YY						
		DuraLastomer™	300				SS Sleeve	S7SU30GL9S**YY	S9SU30GL9S**YY		S8SU30GL9S**YY					
		Hard Rubber	275				Plain	S7HR30GB82**YY	S9HR30GB82**YY		S8HR30GB82**YY					
		Polyolefin	250	B,Z			SS Sleeve	S7PO30G+82**YY	S9PO30G+82**YY		S8PO30G+82**YY					
			300	J,Z			Delrin Sleeve	S7PO30G+90**YY	S9PO30G+90**YY		S8PO30G+90**YY					
							SS BB	S7PO30GZ2S**YY	S9PO30GZ2S**YY		S8PO30GZ2S**YY					
		H.D. Polyolefin	250	B,E			Plain	S7HP30G+82**YY	S9HP30G+82**YY		S8HP30G+82**YY					
		Nylon	300					SS Sleeve	S7NY30GE9S**YY	S9NY30GE9S**YY		S8NY30GE9S**YY				
								SS Prec. BB	S7NY30GE4S**YY	S9NY30GE4S**YY		S8NY30GE4S**YY				
		Phenolic	300				SS Top Hat	S7PH30GB97**YY	S9PH30GB97**YY		S8PH30GB97**YY					
		H.T. Phenolic	200				SSTop Hat	S7HT30GQ97**YY	S9HT30GQ97**YY		S8HT30GQ97**YY					
		BrimStone™	350					SS Top Hat	S7GN30GQ97**YY	S9GN30GQ97**YY		S8GN30GQ97**YY				
	1-1/2"	Phenolic	350				SS Sleeve	S7PH30HB9S**YY	S9PH30HB9S**YY		S8PH30HB9S**YY					

Only Superior Casters are Durable! 24



S7/S8/S9 Stainless Total Lock Caster Series - 350LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock Caster Part #	Swivel Caster Part #	Rigid Caster Part #
3-1/2	1-1/4"	Yoke only				S7ZZ35GZ82**YY	S9ZZ35GZ82**YY	S8ZZ35GZ82**YY
		Soft Rubber	300		Plain	S7SR35GB82**YY	S9SR35GB82**YY	S8SR35GB82**YY
		Thermo-Pro™	230	T,Y	^Precision	S7TP35GI44**YY	S9TP35GI44**YY	S8TP35GI44**YY
						S7TP35G+47**YY	S9TP35G+47**YY	S8TP35G+47**YY
					SS Sleeve	S7TP35G+9S**YY	S9TP35G+9S**YY	S8TP35G+9S**YY
					Plain	S7TP35GI82**YY	S9TP35GI82**YY	S8TP35GI82**YY
		Nomadic™	300	I,L	Delrin	S7NM35G+5A**YY	S9NM35G+5A**YY	S8NM35G+5A**YY
		Element™	220		Delrin	S7EL35GI5A**YY	S9EL35GI5A**YY	S8EL35GI5A**YY
		Poly-Pro™	300	A,D,I,K,S	^Precision	S7PP35G+44**YY	S9PP35G+44**YY	S8PP35G+44**YY
				T,Y		S7PP35G+47**YY	S9PP35G+47**YY	S8PP35G+47**YY
				K,W,P	SS Sleeve	S7PP35G+9S**YY	S9PP35G+9S**YY	S8PP35G+9S**YY
					SS BB	S7PP35G+2S**YY	S9PP35G+2S**YY	S8PP35G+2S**YY
					Delrin	S7PP35G+55**YY	S9PP35G+55**YY	S8PP35G+55**YY
					SS Prec. BB	S7PP35GI4S**YY	S9PP35GI4S**YY	S8PP35GI4S**YY
		Polymadic™	325		Delrin	S7PM35GM5A**YY	S9PM35GM5A**YY	S8PM35GM5A**YY
		Stainless Disc	250		Ball	S7US35GLA3**YY	S9US35GLA3**YY	S8US35GLA3**YY
		Hard Rubber	300		Plain	S7HR35GB82**YY	S9HR35GB82**YY	S8HR35GB82**YY
		Polyolefin	300	J,Z	Plain	S7PO35G+82**YY	S9PO35G+82**YY	S8PO35G+82**YY
		Nylon	325		Plain	S7NY35GE82**YY	S9NY35GE82**YY	S8NY35GE82**YY
					SS Prec. BB	S7NY35GE4S**YY	S9NY35GE4S**YY	S8NY35GE4S**YY
		Phenolic	350		SS Top Hat	S7PH35GB97**YY	S9PH35GB97**YY	S8PH35GB97**YY

Notes



S7/S8/S9 Stainless Total Lock Caster Series - 350LB

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock Caster Part #	Swivel Caster Part #	Rigid Caster Part #
4"	1-1/4"	Yoke only				S7ZZ40GZ82**YY	S9ZZ40GZ82**YY	S8ZZ40GZ82**YY
		Soft Rubber	350		Plain	S7SR40GB82**YY	S9SR40GB82**YY	S8SR40GB82**YY
		Thermo-Pro™	250	T,Y	^Precision	S7TP40GI44**YY	S9TP40GI44**YY	S8TP40GI44**YY
						S7TP40G+47**YY	S9TP40G+47**YY	S8TP40G+47**YY
					SS Sleeve	S7TP40G+9S**YY	S9TP40G+9S**YY	S8TP40G+9S**YY
					SS Prec. BB	S7TP40GI4S**YY	S9TP40GI4S**YY	S8TP40GI4S**YY
		Nomadic™	300	I,L	Delrin	S7NM40G+5A**YY	S9NM40G+5A**YY	S8NM40G+5A**YY
					SS Prec. BB	S7NM40G+4S**YY	S9NM40G+4S**YY	S8NM40G+4S**YY
		Element™	240		Delrin	S7EL40GI5A**YY	S9EL40GI5A**YY	S8EL40GI5A**YY
		Poly-Pro™	250	A,D,I,S,C	^Precision	S7PP40G+44**YY	S9PP40G+44**YY	S8PP40G+44**YY
				T,Y		S7PP40G+47**YY	S9PP40G+47**YY	S8PP40G+47**YY
				W,K,P	SS Sleeve	S7PP40G+9S**YY	S9PP40G+9S**YY	S8PP40G+9S**YY
					SS BB	S7PP40G+2S**YY	S9PP40G+2S**YY	S8PP40G+2S**YY
					Delrin	S7PP40G+55**YY	S9PP40G+55**YY	S8PP40G+55**YY
					SS Prec. BB	S7PP40GI4S**YY	S9PP40GI4S**YY	S8PP40GI4S**YY
		Polymadic™	350		Delrin	S7PM40GM5A**YY	S9PM40GM5A**YY	S8PM40GM5A**YY
		Stainless Disc	270		Ball	S7US40GLA3**YY	S9US40GLA3**YY	S8US40GLA3**YY
		Conductive	250		^Precision	S7CN40GH44**YY	S9CN40GH44**YY	S8CN40GH44**YY
						S7CN40GH4S**YY	S9CN40GH4S**YY	S8CN40GH4S**YY
		SteROLLizer™	300		Plain	S7BF40GC97**YY	S9BF40GC97**YY	S8BF40GC97**YY
						S7SL40GC97**YY	S9SL40GC97**YY	S8SL40GC97**YY
		DuraLastomer™	350		SS Sleeve	S7SU40GL9S**YY	S9SU40GL9S**YY	S8SU40GL9S**YY
		Hard Rubber	350		Plain	S7HR40GB82**YY	S9HR40GB82**YY	S8HR40GB82**YY
		Polyolefin	300	B,Z	Plain	S7PO40G+82**YY	S9PO40G+82**YY	S8PO40G+82**YY
			350	J,Z	SS Sleeve	S7PO40G+9S**YY	S9PO40G+9S**YY	S8PO40G+9S**YY
					SS BB	S7PO40GZ2S**YY	S9PO40GZ2S**YY	S8PO40GZ2S**YY
		H.D. Polyolefin	350	B,E	Plain	S7HP40G+82**YY	S9HP40G+82**YY	S8HP40G+82**YY
		Nylon	350		SS Sleeve	S7NY40GE9S**YY	S9NY40GE9S**YY	S8NY40GE9S**YY
					SS Prec. BB	S7NY40GE4S**YY	S9NY40GE4S**YY	S8NY40GE4S**YY
		Phenolic	350		SS Top Hat	S7PH40GB97**YY	S9PH40GB97**YY	S8PH40GB97**YY
		H.T. Phenolic	250		SS Top Hat	S7HT40GQ97**YY	S9HT40GQ97**YY	S8HT40GQ97**YY
		BrimStone™	300		SS Top Hat	S7GN40GQ97**YY	S9GN40GQ97**YY	S8GN40GQ97**YY
	1-1/2"	H.T. Phenolic	350		SS Sleeve	S7HT40HQ9S**YY	S9HT40HQ9S**YY	S8HT40HQ9S**YY
		BrimStone™	350		SS Sleeve	S7GN40HQ9S**YY	S9GN40HQ9S**YY	S8GN40HQ9S**YY
		Epoxy	350		SS BB	S7OV40HQ2S**YY	S9OV40HQ2S**YY	S8OV40HQ2S**YY
					SS Sleeve	S7OV40HQ9S**YY	S9OV40HQ9S**YY	S8OV40HQ9S**YY
		SteROLLizer™	350		SS Prec. BB	S7BF40HC6106YY	S9BF40HC6106YY	S8BF40HC61**YY
						S7SL40HC6106YY	S9SL40HC6106YY	S8SL40HC61**YY

Only Superior Casters are Durable! 26



S7/S8/S9 Stainless Total Lock Caster Series - 350LB


Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock Caster Part #	Swivel Caster Part #	Rigid Caster Part #
5"	1-1/4"	Yoke only				S7ZZ50GZ82**YY	S9ZZ50GZ82**YY	S8ZZ50GZ82**YY
		Neoprene Energizer™	300		SS Ball B.	S7EN50VB2S**YY	S9EN50VB2S**YY	S8EN50VB2S**YY
					Delrin	S7EN50VB55**YY	S9EN50VB55**YY	S8EN50VB55**YY
		Soft Rubber	250		Plain	S7SR50GB82**YY	S9SR50GB82**YY	S8SR50GB82**YY
		Thermo-Pro™	300	T,Y	^Precision	S7TP50GI44**YY	S9TP50GI44**YY	S8TP50GI44**YY
						S7TP50G+47**YY	S9TP50G+47**YY	S8TP50G+47**YY
					SS Sleeve	S7TP50G+9S**YY	S9TP50G+9S**YY	S8TP50G+9S**YY
					Delrin	S7TP50GI5A**YY	S9TP50GI5A**YY	S8TP50GI5A**YY
					SS Prec. BB	S7TP50GI4S**YY	S9TP50GI4S**YY	S8TP50GI4S**YY
				Nomadic™	325	I,L	Delrin	S7NM50G+5A**YY
		SS Prec. BB	S7NM50G+4S**YY				S9NM50G+4S**YY	S8NM50G+4S**YY
		Element™	250		Delrin	S7EL50GI5A**YY	S9EL50GI5A**YY	S8EL50GI5A**YY
		Poly-Pro™	350	B	Plain	S7PP50GB82**YY	S9PP50GB82**YY	S8PP50GB82**YY
				I,A,D,S	^Precision	S7PP50G+44**YY	S9PP50G+44**YY	S8PP50G+44**YY
				T,Y		S7PP50G+47**YY	S9PP50G+47**YY	S8PP50G+47**YY
					SS Sleeve	S7PP50G+9S**YY	S9PP50G+9S**YY	S8PP50G+9S**YY
				K,W,P	SS BB	S7PP50G+2S**YY	S9PP50G+2S**YY	S8PP50G+2S**YY
					Delrin	S7PP50G+55**YY	S9PP50G+55**YY	S8PP50G+55**YY
					SS Prec. BB	S7PP50GI4S**YY	S9PP50GI4S**YY	S8PP50GI4S**YY
		Polymadic™	350		Delrin	S7PM50GM5A**YY	S9PM50GM5A**YY	S8PM50GM5A**YY
		Stainless Disc	300		Ball	S7US50GLA3**YY	S9US50GLA3**YY	S8US50GLA3**YY
		Conductive	275		^Precision	S7CN50GH44**YY	S9CN50GH44**YY	S8CN50GH44**YY
		DuraLastomer™	350		SS Sleeve	S7SU50GL9S**YY	S9SU50GL9S**YY	S8SU50GL9S**YY
		Hard Rubber	350		Plain	S7HR50GB82**YY	S9HR50GB82**YY	S8HR50GB82**YY
		Polyolefin	350	B,Z	Plain	S7PO50G+82**YY	S9PO50G+82**YY	S8PO50G+82**YY
				J,Z	SS Sleeve	S7PO50G+9S**YY	S9PO50G+9S**YY	S8PO50G+9S**YY
		H.D. Polyolefin	350	B,E	Plain	S7HP50G+82**YY	S9HP50G+82**YY	S8HP50G+82**YY
		Nylon	350		SS Sleeve	S7NY50GE9S**YY	S9NY50GE9S**YY	S8NY50GE9S**YY
	SS Prec. BB				S7NY50GE4S**YY	S9NY50GE4S**YY	S8NY50GE4S**YY	
	Phenolic	350		SS Top Hat	S7PH50GB97**YY	S9PH50GB97**YY	S8PH50GB97**YY	
	1-1/2"	H.T. Phenolic	350		SS Top Hat	S7HT50HG9S**YY	S9HT50HG9S**YY	S8HT50HG9S**YY
		BrimStone™	350		SS Top Hat	S7GN50HG9S**YY	S9GN50HG9S**YY	S8GN50HG9S**YY
		SteROLLizer™	300		SS Ball B.	S7BF50HG9S**YY	S9BF50HG9S**YY	S8BF50HG9S**YY
^Precision is not stainless								



73/74/7T Highly Polished Medium Duty SS Caster - 350LB

High-temp white seal integrated with raceway, grease fitting on dust cover, mechanically polished and buffed to a smooth reflective surface. Seal temperature range is -20°F to 450°F

- Constructed with S304 Stainless Steel
- Hi-Temp seals on raceway as standard
- Modular kingpin is available for any custom fastening pattern
- Mechanically polished and buffed to a smooth reflective surface
- All stainless 304 brake mechanism
- NSF and RoHS Compliant
- Dual ball bearing raceway
- 3/8" axle and nut

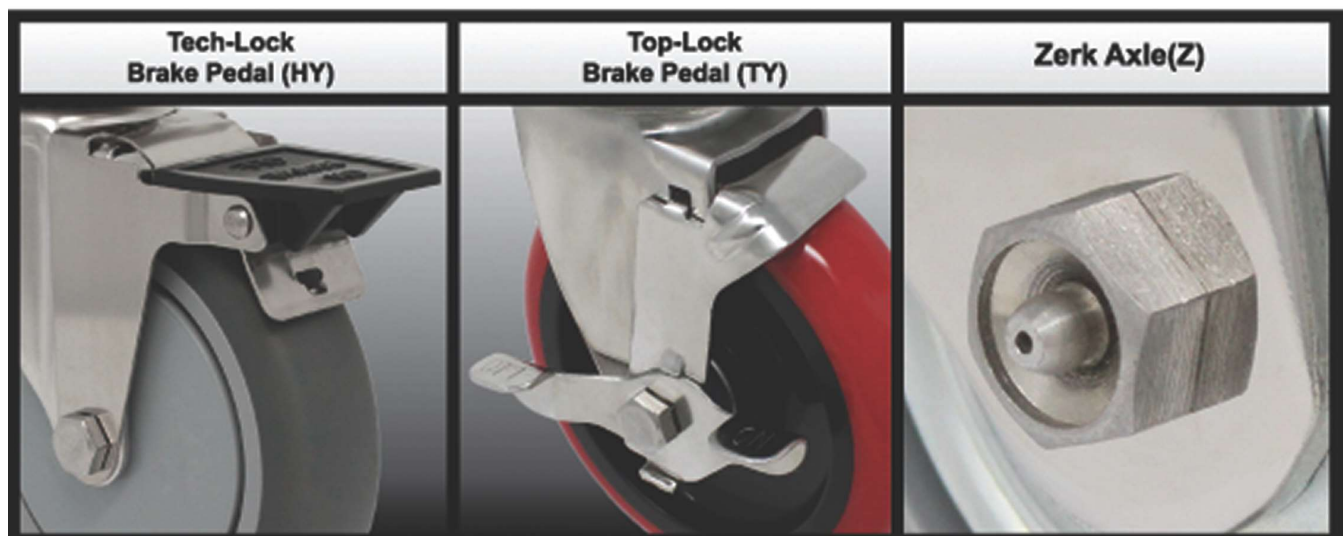

Only Superior Casters are Durable! 28



73/74/7T Highly Polished Medium Duty SS Caster - 350LB

Fastening Options (Replace ** in part number with desired plate or stem code)

Plate Code	Overall Size	Bolt Hole Pattern	Mounting Bolt Size
06	2-3/8 x 3-5/8	1-3/4 x 2-7/8 slotted to 3	5/16
X6	2-3/8 x 3-5/8	1-3/4 x 3 to 2-3/16 x 2-3/4	5/16
11	3-1/8 x 4-1/8	1-3/4 x 2-15/16 to 2-3/8 x 3-3/8	3/8
17	4 x 4-1/2	2-5/8 x 3-5/8 to 3 x 3	3/8

Order the modular stem installed with code - or uninstalled by part #

Permanently attached Stem

Stem Code	Size	Modular Stem Part #	Stem Type	Stem Code	Size	Stem Type
ZZ	1/2		Hollow Kingpin-No Fastener	91	7/16 x 1-3/8	Grip Ring
61	3/8 - 16 x 1	S7STS61	Threaded	68	1/2 - 13 x 1-1/2	Threaded
S1	1/2 - 13 x 4	S7STTS1		70	1/2 - 13 x 2-3/4	
S2	5/8 - 11 x 4	S7STTS2		71	.720 - .851	Rounded Expandable Adaptor
E8	5/8-18 x 1-1/2"	S7STTE8				
S6	3/4 - 10 x 2	S7STTS6		7B	.920 - .980	
S7	3/4 - 10 x 4	S7STTS7		72	.852 - .927	
S3	3/4 - 10 x 6	S7STTS3		73	.928 - 1.029	
S4	3/4 - 10 x 8	S7STTS4		7A	1.020 - 1.100	
S5	3/4 - 10 x 10	S7STTS5		74	1.030 - 1.14	
91	7/16 x 1-3/8	S7STG91	Grip Ring	75	1.360 - 1.425	Rounded Expandable Adaptor w/ stainless knurl nuts
97	7/16 x 2	S7STG97		76	1.426 - 1.589	
95	.846 x 2-3/16	S7STG91		77	1.790 - 1.850	
57	3/4 x 2	S7STR57	Rounded w/ 3 cross drilled holes	78	1.178 - 1.303	
82	1-1/8 x 2-3/16	S7STG82	Rounded Grip Ring (2 rings)	72S	.852 - .927	
51	3/4 x 2	S7STS51	Squared w/ 3 cross drilled holes	73S	.928 - 1.029	Expandable Adaptor for squared tubing
42	7/8 x 2			76S	1.426 - 1.589	
41	.865 x 2-1/4	S7STO41	Octagon w/ Grip Ring	R1	.720 - .851	
G3	7/8 x 3-1/2	S7STGG3	Squared Grip Rings (2 rings)	R2	.852 - .927	
				R3	.928 - 1.029	
				R4	1.030 - 1.140	
				R5	1.360 - 1.425	
				R6	1.426 - 1.589	
				R7	1.790 - 1.850	

SIZE	Overall Height	Swivel Radius	
	#73	#73	#7T
3	4-3/16	2-7/8	4-1/8
3-1/2	4-5/8	3-1/4	4-1/8
4	5-1/4	3-3/8	4-1/8
5	6-3/16	3-7/8	4-1/4
6	7-3/8	4-9/16	4-9/16

*Reduce Overall Height 1/8" for stem casters

29 Only Superior Casters are Durable!



73/74/7T Highly Polished Medium Duty SS Caster - 350LB

WHEELS

TP-Thermo-Pro™						PP-Poly-Pro™																					
A44		C44		I44		T83		Y83		A83		B82		D44		I44		K42		P47		P42		S44		W42	
Wheel Size	Tread Width	Wheel Type		Load Capacity	+Color	Bearing Type		Total Lock #		Swivel Part #		Rigid Part #															
3"	1-1/4"	Yoke only						7TZZ30GZ82**YY		73ZZ30GZ82**YY		74ZZ30GZ82**YY															
		Soft Rubber		300			Plain	7TSR30GB82**YY		73SR30GB82**YY		74SR30GB82**YY															
		Thermo-Pro™		210	T,Y		^Precision	7TTP30GI44**YY		73TP30GI44**YY		74TP30GI44**YY															
								7TTP30G+47**YY		73TP30G+47**YY		74TP30G+47**YY															
							SS Sleeve	7TTP30G+9S**YY		73TP30G+9S**YY		74TP30G+9S**YY															
							SS Prec. BB	7TTP30GI4S**YY		73TP30GI4S**YY		74TP30GI4S**YY															
							Plain	7TTP30GI82**YY		73TP30GI82**YY		74TP30GI82**YY															
		Nomadic™		300	I,L		Delrin	7TNM30G+5A**YY		73NM30G+5A**YY		74NM30G+5A**YY															
		Element™		210			SS Prec. BB	7TNM30G+4S**YY		73NM30G+4S**YY		74NM30G+4S**YY															
						Delrin	7TEL30GI5A**YY		73EL30GI5A**YY		74EL30GI5A**YY																
		Poly-Pro™		300	A,D,I,K,S	T,Y		^Precision	7TPP30G+44**YY		73PP30G+44**YY		74PP30G+44**YY														
									7TPP30G+47**YY		73PP30G+47**YY		74PP30G+47**YY														
								SS Sleeve	7TPP30G+9S**YY		73PP30G+9S**YY		74PP30G+9S**YY														
								SS BB	7TPP30G+2S**YY		73PP30G+2S**YY		74PP30G+2S**YY														
								Delrin	7TPP30G+55**YY		73PP30G+55**YY		74PP30G+55**YY														
						SS Prec. BB	7TPP30GI4S**YY		73PP30GI4S**YY		74PP30GI4S**YY																
		Polymadic™		300			Delrin	7TPM30GM5A**YY		73PM30GM5A**YY		74PM30GM5A**YY															
		DuraLastomer™		300			SS Sleeve	7TSU30GL9S**YY		73SU30GL9S**YY		74SU30GL9S**YY															
		Hard Rubber		275			Plain	7THR30GB82**YY		73HR30GB82**YY		74HR30GB82**YY															
	Polyolefin		250	B,Z		Plain	7TPO30G+82**YY		73PO30G+82**YY		74PO30G+82**YY																
			300	J,Z		SS Sleeve	7TPO30G+9S**YY		73PO30G+9S**YY		74PO30G+9S**YY																
			300			SS BB	7TPO30GZ2S**YY		73PO30GZ2S**YY		74PO30GZ2S**YY																
	H.D. Polyolefin		250	B,E		Plain	7THP30G+82**YY		73HP30G+82**YY		74HP30G+82**YY																
Nylon		300				SS Sleeve	7TNY30GE9S**YY		73NY30GE9S**YY		74NY30GE9S**YY																
						SS Prec. BB	7TNY30GE4S**YY		73NY30GE4S**YY		74NY30GE4S**YY																
Phenolic		300			SS Top Hat	7TPH30GB97**YY		73PH30GB97**YY		74PH30GB97**YY																	
H.T. Phenolic		200			SSTop Hat	7THT30GQ97**YY		73HT30GQ97**YY		74HT30GQ97**YY																	
BrimStone™		350			SS Top Hat	7TGN30GQ97**YY		73GN30GQ97**YY		74GN30GQ97**YY																	
1-1/2"	Phenolic	350			SS Sleeve	7TPH30HB9S**YY		73PH30HB9S**YY		74PH30HB9S**YY																	



73/74/7T Highly Polished Medium Duty SS Caster - 350LB

Wheel Size	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock #	Swivel Part #	Rigid Part #
3-1/2"	1-1/4"	Yoke only				7TZZ35GZ82**YY	73ZZ35GZ82**YY	74ZZ35GZ82**YY
		Soft Rubber	300		Plain	7TSR35GB82**YY	73SR35GB82**YY	74SR35GB82**YY
		Thermo-Pro™	230	T,Y	^Precision	7TTP35GI44**YY	73TP35GI44**YY	74TP35GI44**YY
					SS Sleeve	7TTP35G+47**YY	73TP35G+47**YY	74TP35G+47**YY
					SS Sleeve	7TTP35G+9S**YY	73TP35G+9S**YY	74TP35G+9S**YY
		Nomadic™	300	I,L	Delrin	7TTP35GI82**YY	73TP35GI82**YY	74TP35GI82**YY
		Element™	220		Delrin	7TNM35G+5A**YY	73NM35G+5A**YY	74NM35G+5A**YY
		Poly-Pro™	300	A,D,I,K,S	^Precision	7TEL35GI5A**YY	73EL35GI5A**YY	74EL35GI5A**YY
				T,Y	SS Sleeve	7TTP35G+44**YY	73PP35G+44**YY	74PP35G+44**YY
					SS BB	7TTP35G+47**YY	73PP35G+47**YY	74PP35G+47**YY
				K,W,P	SS Sleeve	7TTP35G+9S**YY	73PP35G+9S**YY	74PP35G+9S**YY
					SS BB	7TTP35G+2S**YY	73PP35G+2S**YY	74PP35G+2S**YY
		Polymadic™	325		Delrin	7TPP35G+55**YY	73PP35G+55**YY	74PP35G+55**YY
		Stainless Disc	250		Delrin	7TPP35GI4S**YY	73PP35GI4S**YY	74PP35GI4S**YY
		Hard Rubber	300		Ball	7TPM35GM5A**YY	73PM35GM5A**YY	74PM35GM5A**YY
		Polyolefin	300	J,Z	Plain	7TUS35GLA3**YY	73US35GLA3**YY	74US35GLA3**YY
		Nylon	325		Plain	7THR35GB82**YY	73HR35GB82**YY	74HR35GB82**YY
					SS Prec. BB	7TPO35G+82**YY	73PO35G+82**YY	74PO35G+82**YY
		Phenolic	350		Plain	7TNY35GE82**YY	73NY35GE82**YY	74NY35GE82**YY
					SS Prec. BB	7TNY35GE4S**YY	73NY35GE4S**YY	74NY35GE4S**YY
4"	1-1/4"	Yoke only				7TPH35GB97**YY	73PH35GB97**YY	74PH35GB97**YY
		Soft Rubber	350		SS Top Hat	7TZZ40GZ82**YY	73ZZ40GZ82**YY	74ZZ40GZ82**YY
		Thermo-Pro™	250	T,Y	Plain	7TSR40GB82**YY	73SR40GB82**YY	74SR40GB82**YY
					^Precision	7TTP40GI44**YY	73TP40GI44**YY	74TP40GI44**YY
					SS Sleeve	7TTP40G+47**YY	73TP40G+47**YY	74TP40G+47**YY
					SS Sleeve	7TTP40G+9S**YY	73TP40G+9S**YY	74TP40G+9S**YY
					SS Prec. BB	7TTP40GI4S**YY	73TP40GI4S**YY	74TP40GI4S**YY
		Nomadic™	300	I,L	Plain	7TTP40GI82**YY	73TP40GI82**YY	74TP40GI82**YY
		Element™	240		Delrin	7TNM40G+5A**YY	73NM40G+5A**YY	74NM40G+5A**YY
		Poly-Pro™	350	A,D,I,S,C	Delrin	7TNM40G+4S**YY	73NM40G+4S**YY	74NM40G+4S**YY
				T,Y	^Precision	7TEL40GI5A**YY	73EL40GI5A**YY	74EL40GI5A**YY
					SS Sleeve	7TPP40G+44**YY	73PP40G+44**YY	74PP40G+44**YY
				K,W,P	SS Sleeve	7TPP40G+47**YY	73PP40G+47**YY	74PP40G+47**YY
					SS BB	7TPP40G+9S**YY	73PP40G+9S**YY	74PP40G+9S**YY
					SS BB	7TPP40G+2S**YY	73PP40G+2S**YY	74PP40G+2S**YY
		Polymadic™	350		Delrin	7TPP40G+55**YY	73PP40G+55**YY	74PP40G+55**YY
		Stainless Disc	270		Delrin	7TPP40GI4S**YY	73PP40GI4S**YY	74PP40GI4S**YY
		Conductive	250		Delrin	7TPM40GM5A**YY	73PM40GM5A**YY	74PM40GM5A**YY
		SteROLLizer™	300		Ball	7TUS40GLA3**YY	73US40GLA3**YY	74US40GLA3**YY
					^Precision	7TCN40GH44**YY	73CN40GH44**YY	74CN40GH44**YY
		DuraLastomer™	350		Precision	7TCN40GH4S**YY	73CN40GH4S**YY	74CN40GH4S**YY
		Hard Rubber	350		SS Top Hat	7TBF40GC97**YY	73BF40GC97**YY	74BF40GC97**YY
		Polyolefin	300	B,Z	SS Top Hat	7TSL40GC97**YY	73SL40GC97**YY	74SL40GC97**YY
			350	J,Z	SS Sleeve	7TSU40GL9S**YY	73SU40GL9S**YY	74SU40GL9S**YY
			350		SS Sleeve	7THR40GB82**YY	73HR40GB82**YY	74HR40GB82**YY
		H.D. Polyolefin	350	B,E	Plain	7TPO40G+82**YY	73PO40G+82**YY	74PO40G+82**YY
		Nylon	350		SS Sleeve	7TPO40G+9S**YY	73PO40G+9S**YY	74PO40G+9S**YY
					SS BB	7TPO40GZ2S**YY	73PO40GZ2S**YY	74PO40GZ2S**YY
		Phenolic	350		Plain	7TPO40GZ2S**YY	73PO40GZ2S**YY	74PO40GZ2S**YY
		H.T. Phenolic	250		SS Prec. BB	7THP40G+82**YY	73HP40G+82**YY	74HP40G+82**YY
		BrimStone™	300		SS Sleeve	7TNY40GE9S**YY	73NY40GE9S**YY	74NY40GE9S**YY
		H.T. Phenolic	350		SS Prec. BB	7TNY40GE4S**YY	73NY40GE4S**YY	74NY40GE4S**YY
					SS Top Hat	7TPH40GB97**YY	73PH40GB97**YY	74PH40GB97**YY
		Phenolic	350		SS Top Hat	7THT40GQ97**YY	73HT40GQ97**YY	74HT40GQ97**YY
		BrimStone™	300		SS Top Hat	7TGN40GQ97**YY	73GN40GQ97**YY	74GN40GQ97**YY
		H.T. Phenolic	350		SS Sleeve	7THT40HQ9S**YY	73HT40HQ9S**YY	74HT40HQ9S**YY
					SS Sleeve	7TGN40HQ9S**YY	73GN40HQ9S**YY	74GN40HQ9S**YY
		Epoxy	350		SS BB	7TOV40HQP4**YY	73OV40HQP4**YY	74OV40HQP4**YY
					SS Sleeve	7TOV40HQ9S**YY	73OV40HQ9S**YY	74OV40HQ9S**YY
		SteROLLizer™	350		SS Prec. BB	7TBF40HC61**YY	73BF40HC61**YY	74BF40HC61**YY
					SS Prec. BB	7TSL40HC61**YY	73SL40HC61**YY	74SL40HC61**YY



73/74/7T Highly Polished Medium Duty SS Caster - 350LB

Wheel Size	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock #	Swivel Part #	Rigid Part #
4"	1-1/4"	Yoke only				7TZZ4AGZ81**YY	73ZZ4AGZ81**YY	74ZZ4AGZ81**YY
		Soft Rubber	350		Plain	7TSR4AGB82**YY	73SR4AGB82**YY	74SR4AGB82**YY
		Thermo-Pro™	250	T,Y	^Precision	7TTP4AGI44**YY	73TP4AGI44**YY	74TP4AGI44**YY
						7TTP4AG+47**YY	73TP4AG+47**YY	74TP4AG+47**YY
					SS Sleeve	7TTP4AG+9S**YY	73TP4AG+9S**YY	74TP4AG+9S**YY
					SS Prec. BB	7TTP4AGI4S**YY	73TP4AGI4S**YY	74TP4AGI4S**YY
					Plain	7TTP4AGI82**YY	73TP4AGI82**YY	74TP4AGI82**YY
		Nomadic™	300	I,L	Delrin	7TNM4AG+5A**YY	73NM4AG+5A**YY	74NM4AG+5A**YY
					SS Prec. BB	7TNM4AG+4S**YY	73NM4AG+4S**YY	74NM4AG+4S**YY
		Element™	240		Delrin	7TEL4AGI5A**YY	73EL4AGI5A**YY	74EL4AGI5A**YY
		Poly-Pro™	350	A,D,I,S,C	^Precision	7TPP4AG+44**YY	73PP4AG+44**YY	74PP4AG+44**YY
				T,Y		7TPP4AG+47**YY	73PP4AG+47**YY	74PP4AG+47**YY
					SS Sleeve	7TPP4AG+9S**YY	73PP4AG+9S**YY	74PP4AG+9S**YY
				K,W,P	SS BB	7TPP4AG+2S**YY	73PP4AG+2S**YY	74PP4AG+2S**YY
					Delrin	7TPP4AG+55**YY	73PP4AG+55**YY	74PP4AG+55**YY
					SS Prec. BB	7TPP4AGI4S**YY	73PP4AGI4S**YY	74PP4AGI4S**YY
		Polymadic™	350		Delrin	7TPM4AGM5A**YY	73PM4AGM5A**YY	74PM4AGM5A**YY
		Stainless Disc	270		Ball	7TUS4AGLA3**YY	73US4AGLA3**YY	74US4AGLA3**YY
		Conductive	250		^Precision	7TCN4AGH44**YY	73CN4AGH44**YY	74CN4AGH44**YY
					Precision	7TCN4AGH4S**YY	73CN4AGH4S**YY	74CN4AGH4S**YY
		SteROLLizer™	300		SS Top Hat	7TBF4AGC97**YY	73BF4AGC97**YY	74BF4AGC97**YY
						7TSL4AGC97**YY	73SL4AGC97**YY	74SL4AGC97**YY
		DuraLastomer™	350		SS Sleeve	7TSU4AGL9S**YY	73SU4AGL9S**YY	74SU4AGL9S**YY
		Hard Rubber	350		Plain	7THR4AGB82**YY	73HR4AGB82**YY	74HR4AGB82**YY
		Polyolefin	300	B,Z	Plain	7TPO4AG+82**YY	73PO4AG+82**YY	74PO4AG+82**YY
			350	J,Z	SS Sleeve	7TPO4AG+9S**YY	73PO4AG+9S**YY	74PO4AG+9S**YY
			350		SS BB	7TPO4AGZ2S**YY	73PO4AGZ2S**YY	74PO4AGZ2S**YY
		H.D. Polyolefin	350	B,E	Plain	7THP4AG+82**YY	73HP4AG+82**YY	74HP4AG+82**YY
		Nylon	350		SS Sleeve	7TNY4AGE9S**YY	73NY4AGE9S**YY	74NY4AGE9S**YY
					SS Prec. BB	7TNY4AGE4S**YY	73NY4AGE4S**YY	74NY4AGE4S**YY
		Phenolic	350		SS Top Hat	7TPH4AGB97**YY	73PH4AGB97**YY	74PH4AGB97**YY
		H.T. Phenolic	250		SS Top Hat	7THT4AGQ97**YY	73HT4AGQ97**YY	74HT4AGQ97**YY
	BrimStone™	300		SS Top Hat	7TGN4AGQ97**YY	73GN4AGQ97**YY	74GN4AGQ97**YY	
	1-1/2"	H.T. Phenolic	350		SS Sleeve	7THT4AHQ9S**YY	73HT4AHQ9S**YY	74HT4AHQ9S**YY
		BrimStone™	350		SS Sleeve	7TGN4AHQ9S**YY	73GN4AHQ9S**YY	74GN4AHQ9S**YY
		Epoxy	350		SS BB	7TOV4AHQP4**YY	73OV4AHQP4**YY	74OV4AHQP4**YY
					SS Sleeve	7TOV4AHQ9S**YY	73OV4AHQ9S**YY	74OV4AHQ9S**YY
		SteROLLizer™	350		SS Prec. BB	7TBF4AHC61**YY	73BF4AHC61**YY	74BF4AHC61**YY
7TSL4AHC61**YY						73SL4AHC61**YY	74SL4AHC61**YY	

Only Superior Casters are Durable! 32



73/74/7T Highly Polished Medium Duty SS Caster - 350LB

Wheel Size	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock #	Swivel Part #	Rigid Part #
5"	1-1/4"	Yoke only				7TZZ50GZ82**YY	73ZZ50GZ82**YY	74ZZ50GZ82**YY
		Neoprene Energizer™	300		SS Ball B.	7TEN50VB2S**YY	73EN50VB2S**YY	74EN50GV2S**YY
					Delrin	7TEN50VB55**YY	73EN50VB55**YY	74EN50GV55**YY
		SteROLLizer™	300		SS Ball B.	7TBG50VO2S**YY	73BG50VO2S**YY	74BG50VO2S**YY
		Soft Rubber	250		Plain	7TSR50GB82**YY	73SR50GB82**YY	74SR50GB82**YY
						7TSR50GB82**YY	73SR50GB82**YY	74SR50GB82**YY
		Thermo-Pro™	300	T,Y	^Precision	7TTP50GI44**YY	73TP50GI44**YY	74TP50GI44**YY
						7TTP50G+47**YY	73TP50G+47**YY	74TP50G+47**YY
					SS Sleeve	7TTP50G+9S**YY	73TP50G+9S**YY	74TP50G+9S**YY
					Delrin	7TTP50GI5A**YY	73TP50GI5A**YY	74TP50GI5A**YY
					SS Prec. BB	7TTP50GI4S**YY	73TP50GI4S**YY	74TP50GI4S**YY
		Nomadic™	325	I,L	Delrin	7TNM50G+5A**YY	73NM50G+5A**YY	74NM50G+5A**YY
					SS Prec. BB	7TNM50G+4S**YY	73NM50G+4S**YY	74NM50G+4S**YY
		Element™	250		Delrin	7TEL50GI5A**YY	73EL50GI5A**YY	74EL50GI5A**YY
		Poly-Pro™	350	I,A,D,S	^Precision	7TPP50G+44**YY	73PP50G+44**YY	74PP50G+44**YY
				B		7TPP50GB82**YY	73PP50GB82**YY	74PP50GB82**YY
				T,Y		7TPP50G+47**YY	73PP50G+47**YY	74PP50G+47**YY
				K,W,P	SS Sleeve	7TPP50G+9S**YY	73PP50G+9S**YY	74PP50G+9S**YY
					SS BB	7TPP50G+2S**YY	73PP50G+2S**YY	74PP50G+2S**YY
					Delrin	7TPP50G+55**YY	73PP50G+55**YY	74PP50G+55**YY
					SS Prec. BB	7TPP50GI4S**YY	73PP50GI4S**YY	74PP50GI4S**YY
		Polymadic™	350		Delrin	7TPM50GM5A**YY	73PM50GM5A**YY	74PM50GM5A**YY
		Stainless Disc	300		Ball	7TUS50GLA3**YY	73US50GLA3**YY	74US50GLA3**YY
		Conductive	275		^Precision	7TCN50GH44**YY	73CN50GH44**YY	74CN50GH44**YY
		DuraLastomer™	350		SS Sleeve	7TSU50GL9S**YY	73SU50GL9S**YY	74SU50GL9S**YY
		Hard Rubber	350		Plain	7THR50GB82**YY	73HR50GB82**YY	74HR50GB82**YY
						7THR50GB82**YY	73HR50GB82**YY	74HR50GB82**YY
		Polyolefin	350	B,Z	Plain	7TPO50G+82**YY	73PO50G+82**YY	74PO50G+82**YY
			350	J,Z	SS Sleeve	7TPO50G+9S**YY	73PO50G+9S**YY	74PO50G+9S**YY
		H.D. Polyolefin	350	B,E	Plain	7THP50G+82**YY	73HP50G+82**YY	74HP50G+82**YY
		Nylon	350		SS Sleeve	7TNY50GE9S**YY	73NY50GE9S**YY	74NY50GE9S**YY
					SS Prec. BB	7TNY50GE4S**YY	73NY50GE4S**YY	74NY50GE4S**YY
		Phenolic	350		SS Top Hat	7TPH50GB97**YY	73PH50GB97**YY	74PH50GB97**YY
		H.T. Phenolic	350		SS Top Hat	7THT50GQ97**YY	73HT50GQ97**YY	74HT50GQ97**YY
		BrimStone™	350		SS Top Hat	7TGN50GQ97**YY	73GN50GQ97**YY	74GN50GQ97**YY
6"	1-1/4"	Yoke only				7TZZ60GZ82**YY	73ZZ60GZ82**YY	74ZZ60GZ82**YY
		Thermo-Pro™	300	T,Y	^Precision	7TTP60GI44**YY	73TP60GI44**YY	74TP60GI44**YY
						7TTP60G+47**YY	73TP60G+47**YY	74TP60G+47**YY
					SS Sleeve	7TTP60G+9S**YY	73TP60G+9S**YY	74TP60G+9S**YY
		Poly-Pro™	350	I,A	^Precision	7TPP60G+44**YY	73PP60G+44**YY	74PP60G+44**YY
				T,Y		7TPP60G+47**YY	73PP60G+47**YY	74PP60G+47**YY
				K,W,P	SS Sleeve	7TPP60G+9S**YY	73PP60G+9S**YY	74PP60G+9S**YY
					SS BB	7TPP60G+2S**YY	73PP60G+2S**YY	74PP60G+2S**YY
		Polyolefin	350		Plain	7TPO60GZ82**YY	73PO60GZ82**YY	74PO60GZ82**YY
			350	J,Z	SS Sleeve	7TPO60G+9S**YY	73PO60G+9S**YY	74PO60G+9S**YY
6"	1-1/2"	DuraLastomer™	350		SS Sleeve	7TSU60HL9S**YY	73SU60HL9S**YY	74SU60HL9S**YY



MT/MD/MV Stainless Caster Series - 350LB

MT -- Dual Lever Total Lock

MD -- Directional Lock devise

MV -- SWIVEL



- Easy ON/OFF nylon pedal, with a unique appearance
- Constructed with S304 Stainless Steel
- Electrolytic finish for shining and smooth surface
- Dual nylon lever for brake operator
- Precision Ball Bearing raceway assures smooth ride with maintenance free device
- NSF and RoHS Compliant
- 3/8" axle and nut

Fastening Options (Replace ** in part number with desired plate or stem code)		
Plate Code	Overall Size	Bolt Hole Pattern
06	2-3/8 x 3-5/8	1-3/4 x 2-7/8 slotted to 3

Size	Overall Height*	Swivel Radius		
		MT	MD	MV
3	4-5/8	4-3/8	4-3/8	3-1/4
4	5-5/8	4-3/8	4-3/8	3-3/4
5	6-5/8	4-5/8	4-5/8	4-1/2
6	7-5/8	5	5	5

Only Superior Casters are Durable! 34



MT/MD/MV Stainless Caster Series - 350LB

Wheel Size	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock #	Directional Lock #	Swivel Caster #
3"	1-1/4"	Yoke only				MTZZ30GZ82**YY	MDZZ30GZ82**YY	MVZZ30GZ82**YY
		Soft Rubber	300		Plain	MTSR30GB82**YY	MDSR30GB82**YY	MVSR30GB82**YY
		Thermo-Pro™	210	T,Y	^Precision	MTTP30GI44**YY	MDTP30GI44**YY	MVTP30GI44**YY
						MTTP30G+47**YY	MDTP30G+47**YY	MVTP30G+47**YY
					SS Sleeve	MTTP30G+9S**YY	MDTP30G+9S**YY	MVTP30G+9S**YY
					SS Prec. BB	MTTP30GI4S**YY	MDTP30GI4S**YY	MVTP30GI4S**YY
					Plain	MTTP30GI82**YY	MDTP30GI82**YY	MVTP30GI82**YY
		Nomadic™	300	I,L	Delrin	MTNM30G+5A**YY	MDNM30G+5A**YY	MVNM30G+5A**YY
					SS Prec. BB	MTNM30G+4S**YY	MDNM30G+4S**YY	MVNM30G+4S**YY
		Element™	210		Delrin	MTEL30GI5A**YY	MDEL30GI5A**YY	MVEL30GI5A**YY
		Poly-Pro™	300	A,D,I,K,S	^Precision	MTTP30G+44**YY	MDPP30G+44**YY	MVPP30G+44**YY
						MTTP30G+47**YY	MDPP30G+47**YY	MVPP30G+47**YY
				T,Y	SS Sleeve	MTTP30G+9S**YY	MDPP30G+9S**YY	MVPP30G+9S**YY
						MTTP30G+2S**YY	MDPP30G+2S**YY	MVPP30G+2S**YY
				K,W,P	Delrin	MTTP30G+55**YY	MDPP30G+55**YY	MVPP30G+55**YY
						MTTP30GI4S**YY	MDPP30GI4S**YY	MVPP30GI4S**YY
		Polymadic™	300		Delrin	MTPM30GM5A**YY	MDPM30GM5A**YY	MVPM30GM5A**YY
		DuraLastomer™	300		SS Sleeve	MTSU30GL9S**YY	MDSU30GL9S**YY	MVSU30GL9S**YY
		Hard Rubber	275		Plain	MTHR30GB82**YY	MDHR30GB82**YY	MVHR30GB82**YY
		Polyolefin	250	B,Z	Plain	MTPO30G+82**YY	MDPO30G+82**YY	MVPO30G+82**YY
			300	J,Z	SS Sleeve	MTPO30G+9S**YY	MDPO30G+9S**YY	MVPO30G+9S**YY
			300		SS BB	MTPO30GZ2S**YY	MDPO30GZ2S**YY	MVPO30GZ2S**YY
		H.D. Polyolefin	250	B,E	Plain	MTHP30G+82**YY	MDHP30G+82**YY	MVHP30G+82**YY
		Nylon	300		SS Sleeve	MTNY30GE9S**YY	MDNY30GE9S**YY	MVNY30GE9S**YY
					SS Prec. BB	MTNY30GE4S**YY	MDNY30GE4S**YY	MVNY30GE4S**YY
		Phenolic	300		SS Top Hat	MTPH30GB97**YY	MDPH30GB97**YY	MVPH30GB97**YY
		H.T. Phenolic	200		SS Top Hat	MTHT30GQ97**YY	MDHT30GQ97**YY	MVHT30GQ97**YY
		BrimStone™	350		SS Top Hat	MTGN30GQ97**YY	MDGN30GQ97**YY	MVGN30GQ97**YY
	1-1/2"	Phenolic	350		SS Sleeve	MTPH30HB9S**YY	MDPH30HB9S**YY	MVPH30HB9S**YY



MT/MD/MV Stainless Caster Series - 350LB

Wheel Size	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock #	Directional Lock #	Swivel Caster #
3-1/2"	1-1/4"	Yoke only				MTZZ35GZ82**YY	MDZZ35GZ82**YY	MVZZ35GZ82**YY
		Soft Rubber	300		Plain	MTSR35GB82**YY	MDSR35GB82**YY	MVSR35GB82**YY
		Thermo-Pro™	230	T,Y	^Precision	MTTP35GI44**YY	MDTP35GI44**YY	MVTP35GI44**YY
						MTTP35G+47**YY	MDTP35G+47**YY	MVTP35G+47**YY
				SS Sleeve		MTTP35G+9S**YY	MDTP35G+9S**YY	MVTP35G+9S**YY
						MTTP35GI82**YY	MDTP35GI82**YY	MVTP35GI82**YY
		Nomadic™	300	I,L	Delrin	MTNM35G+5A**YY	MDNM35G+5A**YY	MVNM35G+5A**YY
		Element™	220		Delrin	MTEL35GI5A**YY	MDEL35GI5A**YY	MVEL35GI5A**YY
		Poly-Pro™	300	A,D,I,K,S	^Precision	MTPP35G+44**YY	MDPP35G+44**YY	MVPP35G+44**YY
						MTPP35G+47**YY	MDPP35G+47**YY	MVPP35G+47**YY
				T,Y	SS Sleeve	MTPP35G+9S**YY	MDPP35G+9S**YY	MVPP35G+9S**YY
						MTPP35G+2S**YY	MDPP35G+2S**YY	MVPP35G+2S**YY
				K,W,P	Delrin	MTPP35G+55**YY	MDPP35G+55**YY	MVPP35G+55**YY
						MTPP35GI4S**YY	MDPP35GI4S**YY	MVPP35GI4S**YY
		Polymadic™	325		Delrin	MTPM35GM5A**YY	MDPM35GM5A**YY	MVPM35GM5A**YY
		Stainless Disc	250		Ball	MTUS35GLA3**YY	MDUS35GLA3**YY	MVUS35GLA3**YY
		Hard Rubber	300		Plain	MTHR35GB82**YY	MDHR35GB82**YY	MVHR35GB82**YY
		Polyolefin	300	J,Z	Plain	MTPO35G+82**YY	MDPO35G+82**YY	MVPO35G+82**YY
		Nylon	325		Plain	MTNY35GE82**YY	MDNY35GE82**YY	MVNY35GE82**YY
					SS Prec. BB	MTNY35GE4S**YY	MDNY35GE4S**YY	MVNY35GE4S**YY
		Phenolic	350		SS Top Hat	MTPH35GB97**YY	MDPH35GB97**YY	MVPH35GB97**YY

Only Superior Casters are Durable! 36



MT/MD/MV Stainless Caster Series - 350LB

Wheel Size	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock #	Directional Lock #	Swivel Caster #
4"	1-1/4"	Yoke only				MTZZ40GZ82**YY	MDZZ40GZ82**YY	MVZZ40GZ82**YY
		Soft Rubber	350		Plain	MTSR40GB82**YY	MDSR40GB82**YY	MVSR40GB82**YY
		Thermo-Pro™	250	T,Y	^Precision	MTTP40GI44**YY	MDTP40GI44**YY	MVTP40GI44**YY
						MTTP40G+47**YY	MDTP40G+47**YY	MVTP40G+47**YY
					SS Sleeve	MTTP40G+9S**YY	MDTP40G+9S**YY	MVTP40G+9S**YY
				SS Prec. BB		MTTP40GI4S**YY	MDTP40GI4S**YY	MVTP40GI4S**YY
					Plain	MTTP40GI82**YY	MDTP40GI82**YY	MVTP40GI82**YY
		Nomadic™	300	I,L	Delrin	MTNM40G+5A**YY	MDNM40G+5A**YY	MVNM40G+5A**YY
					SS Prec. BB	MTNM40G+4S**YY	MDNM40G+4S**YY	MVNM40G+4S**YY
		Element™	240		Delrin	MTEL40GI5A**YY	MDEL40GI5A**YY	MVEL40GI5A**YY
		Poly-Pro™	350	A,D,I,S,C	^Precision	MTPP40G+44**YY	MDPP40G+44**YY	MVPP40G+44**YY
						MTPP40G+47**YY	MDPP40G+47**YY	MVPP40G+47**YY
				T,Y	SS Sleeve	MTPP40G+9S**YY	MDPP40G+9S**YY	MVPP40G+9S**YY
					SS BB	MTPP40G+2S**YY	MDPP40G+2S**YY	MVPP40G+2S**YY
				K,W,P	Delrin	MTPP40G+55**YY	MDPP40G+55**YY	MVPP40G+55**YY
					SS Prec. BB	MTPP40GI4S**YY	MDPP40GI4S**YY	MVPP40GI4S**YY
		Polymadic™	350		Delrin	MTPM40GM5A**YY	MDPM40GM5A**YY	MVPM40GM5A**YY
		Stainless Disc	270		Ball	MTUS40GLA3**YY	MDUS40GLA3**YY	MVUS40GLA3**YY
		Conductive	250		^Precision	MTCN40GH44**YY	MDCN40GH44**YY	MVCN40GH44**YY
					Precision	MTCN40GH4S**YY	MDCN40GH4S**YY	MVCN40GH4S**YY
		SteROLLizer™	300		SS Top Hat	MTBF40GC97**YY	MDBF40GC97**YY	MVBF40GC97**YY
						MTSL40GC97**YY	MDSL40GC97**YY	MVSL40GC97**YY
		DuraLastomer™	350		SS Sleeve	MTSU40GL9S**YY	MDSU40GL9S**YY	MVSU40GL9S**YY
		Hard Rubber	350		Plain	MTHR40GB82**YY	MDHR40GB82**YY	MVHR40GB82**YY
		Polyolefin	300	B,Z	Plain	MTPO40G+82**YY	MDPO40G+82**YY	MVPO40G+82**YY
			350	J,Z	SS Sleeve	MTPO40G+9S**YY	MDPO40G+9S**YY	MVPO40G+9S**YY
			350		SS BB	MTPO40GZ2S**YY	MDPO40GZ2S**YY	MVPO40GZ2S**YY
		H.D. Polyolefin	350	B,E	Plain	MTHP40G+82**YY	MDHP40G+82**YY	MVHP40G+82**YY
		Nylon	350		SS Sleeve	MTNY40GE9S**YY	MDNY40GE9S**YY	MVNY40GE9S**YY
					SS Prec. BB	MTNY40GE4S**YY	MDNY40GE4S**YY	MVNY40GE4S**YY
		Phenolic	350		SS Top Hat	MTPH40GB97**YY	MDPH40GB97**YY	MVPH40GB97**YY
		H.T. Phenolic	250		SS Top Hat	MTHT40GQ97**YY	MDHT40GQ97**YY	MVHT40GQ97**YY
		BrimStone™	300		SS Top Hat	MTGN40GQ97**YY	MDGN40GQ97**YY	MVGN40GQ97**YY
	1-1/2"	H.T. Phenolic	350		SS Sleeve	MTHT40HQ9S**YY	MDHT40HQ9S**YY	MVHT40HQ9S**YY
		BrimStone™	350		SS Sleeve	MTGN40HQ9S**YY	MDGN40HQ9S**YY	MVGN40HQ9S**YY
		Epoxy	350		SS BB	MTOV40HQP4**YY	MDOV40HQP4**YY	MVOV40HQP4**YY
					SS Sleeve	MTOV40HQ9S**YY	MDOV40HQ9S**YY	MVOV40HQ9S**YY
		SteROLLizer™	350		SS Prec. BB	MTBF40HC61**YY	MDBF40HC61**YY	MVBF40HC61**YY
						MTSL40HC61**YY	MDSL40HC61**YY	MVSL40HC61**YY




MT/MD/MV Stainless Caster Series - 350LB

Wheel Size	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock #	Directional Lock #	Swivel Caster #
5"	1-1/4"	Yoke only				MTZZ50GZ82**YY	MDZZ50GZ82**YY	MVZZ50GZ82**YY
		Neoprene Energizer™	300		SS Ball B.	MTEN50VB2S**YY	MDEN50VB2S**YY	MVEN50GV2S**YY
					Delrin	MTEN50VB55**YY	MDEN50VB55**YY	MVEN50GV55**YY
		SteROLLizer™	300		SS Ball B.	MTBG50VO2S**YY	MDBG50VO2S**YY	MVBG50VO2S**YY
		Soft Rubber	250		Plain	MTSR50GB82**YY	MDSR50GB82**YY	MVSR50GB82**YY
		Thermo-Pro™	300	T,Y	^Precision	MTTP50GI44**YY	MDTP50GI44**YY	MVTP50GI44**YY
						MTTP50G+47**YY	MDTP50G+47**YY	MVTP50G+47**YY
					SS Sleeve	MTTP50G+9S**YY	MDTP50G+9S**YY	MVTP50G+9S**YY
					Delrin	MTTP50GI5A**YY	MDTP50GI5A**YY	MVTP50GI5A**YY
		Nomadic™	325	I,L	Delrin	MTNM50G+5A**YY	MDNM50G+5A**YY	MVNM50G+5A**YY
					SS Prec. BB	MTNM50G+4S**YY	MDNM50G+4S**YY	MVNM50G+4S**YY
		Element™	250		Delrin	MTEL50GI5A**YY	MDEL50GI5A**YY	MVEL50GI5A**YY
		Poly-Pro™	350	I,A,D,S	^Precision	MTPP50G+44**YY	MDPP50G+44**YY	MVPP50G+44**YY
				B		MTPP50GB82**YY	MDPP50GB82**YY	MVPP50GB82**YY
				T,Y		MTPP50G+47**YY	MDPP50G+47**YY	MVPP50G+47**YY
				K,W,P	SS Sleeve	MTPP50G+9S**YY	MDPP50G+9S**YY	MVPP50G+9S**YY
					SS BB	MTPP50G+2S**YY	MDPP50G+2S**YY	MVPP50G+2S**YY
					Delrin	MTPP50G+55**YY	MDPP50G+55**YY	MVPP50G+55**YY
					SS Prec. BB	MTPP50GI4S**YY	MDPP50GI4S**YY	MVPP50GI4S**YY
		Polymadic™	350		Delrin	MTPM50GM5A**YY	MDPM50GM5A**YY	MVPM50GM5A**YY
		Stainless Disc	300		Ball	MTUS50GLA3**YY	MDUS50GLA3**YY	MVUS50GLA3**YY
		Conductive	275		^Precision	MTCN50GH44**YY	MDCN50GH44**YY	MVCN50GH44**YY
		DuraLastomer™	350		SS Sleeve	MTSU50GL9S**YY	MDSU50GL9S**YY	MVSU50GL9S**YY
		Hard Rubber	350		Plain	MTHR50GB82**YY	MDHR50GB82**YY	MVHR50GB82**YY
		Polyolefin	350	B,Z	Plain	MTPO50G+82**YY	MDPO50G+82**YY	MVPO50G+82**YY
			350	J,Z	SS Sleeve	MTPO50G+9S**YY	MDPO50G+9S**YY	MVPO50G+9S**YY
		H.D. Polyolefin	350	B,E	Plain	MTHP50G+82**YY	MDHP50G+82**YY	MVHP50G+82**YY
		Nylon	350		SS Sleeve	MTNY50GE9S**YY	MDNY50GE9S**YY	MVNY50GE9S**YY
					SS Prec. BB	MTNY50GE4S**YY	MDNY50GE4S**YY	MVNY50GE4S**YY
		Phenolic	350		SS Top Hat	MTPH50GB97**YY	MDPH50GB97**YY	MVPH50GB97**YY
		H.T. Phenolic	350		SS Top Hat	MTHT50GQ97**YY	MDHT50GQ97**YY	MVHT50GQ97**YY
		BrimStone™	350		SS Top Hat	MTGN50GQ97**YY	MDGN50GQ97**YY	MVGN50GQ97**YY
6"	1-1/4"	Yoke only				MTZZ60GZ82**YY	MDZZ60GZ82**YY	MVZZ60GZ82**YY
		Thermo-Pro™	300	T,Y	^Precision	MTTP60GI44**YY	MDTP60GI44**YY	MVTP60GI44**YY
						MTTP60G+47**YY	MDTP60G+47**YY	MVTP60G+47**YY
					SS Sleeve	MTTP60G+9S**YY	MDTP60G+9S**YY	MVTP60G+9S**YY
		Poly-Pro™	350	I,A	^Precision	MTPP60G+44**YY	MDPP60G+44**YY	MVPP60G+44**YY
				T,Y		MTPP60G+47**YY	MDPP60G+47**YY	MVPP60G+47**YY
				K,W,P	SS Sleeve	MTPP60G+9S**YY	MDPP60G+9S**YY	MVPP60G+9S**YY
					SS BB	MTPP60G+2S**YY	MDPP60G+2S**YY	MVPP60G+2S**YY
		Polyolefin	350		Plain	MTPO60GZ82**YY	MDPO60GZ82**YY	MVPO60GZ82**YY
			350	J,Z	SS Sleeve	MTPO60G+9S**YY	MDPO60G+9S**YY	MVPO60G+9S**YY



RZ/RT/RB Stainless Casters - 350lb

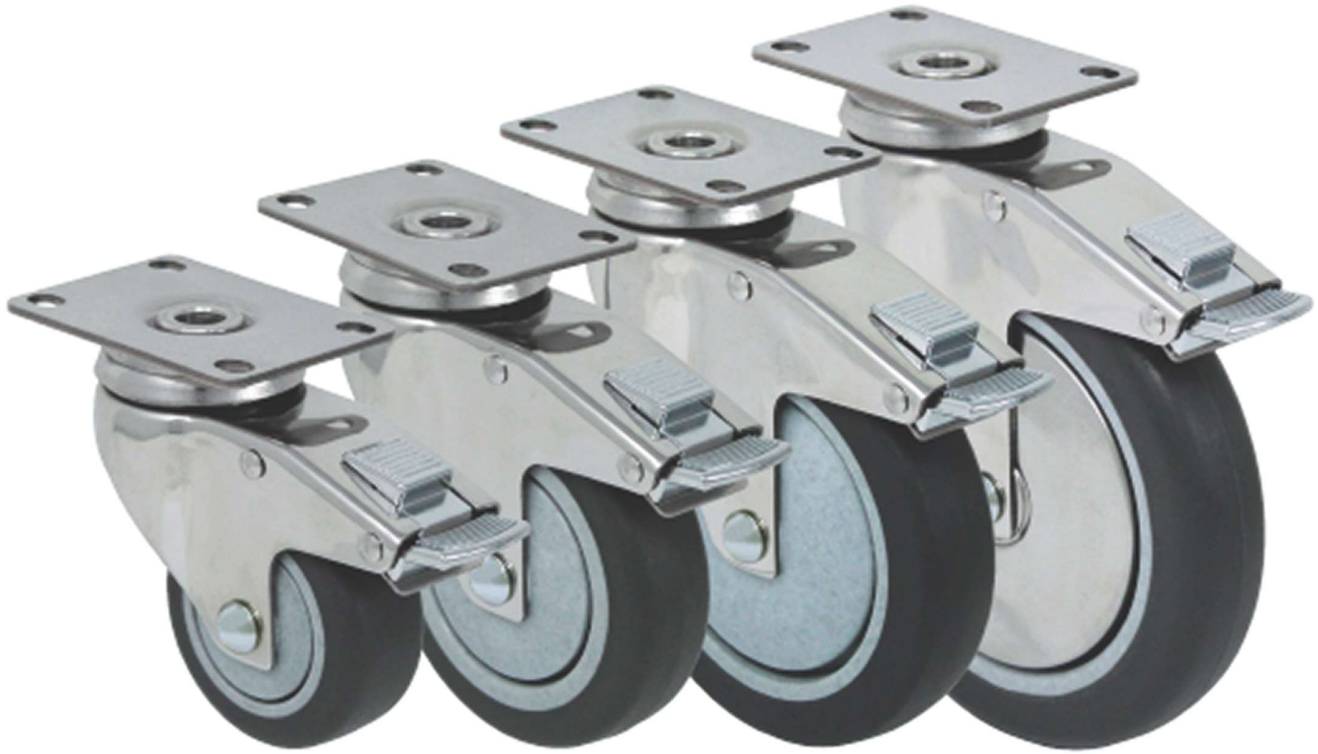

RZ -- Free Swivel Caster

RT -- Total lock Caster, lock swivel and wheel simultaneously

RB -- Directional Lock, lock swivel to steer straight

- Constructed with S304 Stainless Steel
- Mechanically polished and buffed to a smooth reflective surface
- All-304 SS brake mechanism
- Dual ball bearings raceway
- 3/8" axle and nut
- NSF and RoHS Compliant
- #06 Plate with hollow kingpin



RZ/RT/RB Stainless Casters - 350lb

Fastening Options (Replace ** in part number with desired plate or stem code)			
Plate Code	Overall Size	Bolt Hole Pattern	Mounting Bolt Size
06	2-3/8 x 3-5/8	1-3/4 x 2-7/8 slotted to 3	5/16
6M	c	1.88 x 2.24 to 2 x 2.40	5/16

				Permanently attached Stem		
Stem Code	Size	Modular Stem Part #	Stem Type	Stem Code	Size	Stem Type
ZZ	1/2		Hollow Kingpin-No Fastener	91	7/16 x 1-3/8	Grip Ring
61	3/8 - 16 x 1	S7STS61	Threaded	68	1/2 - 13 x 1-1/2	Threaded
S1	1/2 - 13 x 4	S7STTS1		70	1/2 - 13 x 2-3/4	
S2	5/8 - 11 x 4	S7STTS2		71	.720 - .851	Rounded Expandable Adaptor
S6	3/4 - 10 x 2	S7STTS6		7B	.920 - .980	
S7	3/4 - 10 x 4	S7STTS7		72	.852 - .927	
S3	3/4 - 10 x 6	S7STTS3		73	.928 - 1.029	
S4	3/4 - 10 x 8	S7STTS4		7A	1.020 - 1.100	
S5	3/4 - 10 x 10	S7STTS5		74	1.030 - 1.14	
91	7/16 x 1-3/8	S7STG91	Grip Ring	75	1.360 - 1.425	Rounded Expandable Adaptor w/ stainless knurl nuts
97	7/16 x 2	S7STG97		76	1.426 - 1.589	
95	.846 x 2-3/16	S7STG95		77	1.790 - 1.850	
57	3/4 x 2	S7STR57	Rounded w/ 3 cross drilled holes	78	1.178 - 1.303	
82	1-1/8 x 2-3/16	S7STG82	Rounded Grip Ring (2 rings)	72S	.852 - .927	Rounded Expandable Adaptor w/ stainless knurl nuts
51	3/4 x 2	S7STS51	Squared w/ 3 cross drilled holes	73S	.928 - 1.029	
42	7/8 x 2			76S	1.426 - 1.589	Expandable Adaptor for squared tubing
41	.865 x 2-1/4	S7STO41	Octagon w/ Grip Ring	R1	.720 - .851	
G3	7/8 x 3-1/2	S7STGG3	Squared Grip Rings (2 rings)	R2	.852 - .927	
Order the modular stem installed with code - or uninstalled by part #				R3	.928 - 1.029	
				R4	1.030 - 1.140	
				R5	1.360 - 1.425	
				R6	1.426 - 1.589	

		Swivel Radius	
Size	Overall Height	Swivel Caster	Total Lock/Directional Lock
3	4-7/16	2-29/32	4-1/4
4	5-7/16	3-19/32	4-17/32
5	6-3/16	4-1/4	4-27/32
6	7-7/16	4-5/8	4-15/16

*Reduce Overall Height 1/8" for stem casters

Only Superior Casters are Durable! 40



RZ/RT/RB Stainless Casters - 350lb

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock Caster #	Directional Lock Caster #	Swivel Caster #
3"	1-1/4"	Yoke only				RTZZ30GZ82**YY	RBZZ30GZ82**YY	RZZZ30GZ82**YY
		Soft Rubber	300		Plain	RTSR30GB82**YY	RBSR30GB82**YY	RZSR30GB82**YY
		Thermo-Pro™	210	T,Y	^Precision	RTTP30GI44**YY	RBTP30GI44**YY	RZTP30GI44**YY
						RTTP30G+47**YY	RBTP30G+47**YY	RZTP30G+47**YY
					SS Sleeve	RTTP30G+9S**YY	RBTP30G+9S**YY	RZTP30G+9S**YY
					SS Prec. BB	RTTP30GI4S**YY	RBTP30GI4S**YY	RZTP30GI4S**YY
					Plain	RTTP30GI82**YY	RBTP30GI82**YY	RZTP30GI82**YY
		Nomadic™	300	I,L	Delrin	RTNM30G+5A**YY	RBNM30G+5A**YY	RZNM30G+5A**YY
					SS Prec. BB	RTNM30G+4S**YY	RBNM30G+4S**YY	RZNM30G+4S**YY
		Element™	210		Delrin	RTEL30GI5A**YY	RBEL30GI5A**YY	RZEL30GI5A**YY
		Poly-Pro™	300	A,D,I,K,S	^Precision	RTPP30G+44**YY	RBPP30G+44**YY	RZPP30G+44**YY
				T,Y	^Precision	RTPP30G+47**YY	RBPP30G+47**YY	RZPP30G+47**YY
					SS Sleeve	RTPP30G+9S**YY	RBPP30G+9S**YY	RZPP30G+9S**YY
				K,W,P	SS BB	RTPP30G+2S**YY	RBPP30G+2S**YY	RZPP30G+2S**YY
					Delrin	RTPP30G+55**YY	RBPP30G+55**YY	RZPP30G+55**YY
					SS Prec. BB	RTPP30GI4S**YY	RBPP30GI4S**YY	RZPP30GI4S**YY
		Polymadic™	300		Delrin	RTPM30GM5A**YY	RBPM30GM5A**YY	RZPM30GM5A**YY
		DuraLastomer™	300		SS Sleeve	RTSU30GL9S**YY	RBSU30GL9S**YY	RZSU30GL9S**YY
		Hard Rubber	275		Plain	RTHR30GB82**YY	RBHR30GB82**YY	RZHR30GB82**YY
		Polyolefin	250	B,Z	Plain	RTPO30G+82**YY	RBPO30G+82**YY	RZPO30G+82**YY
			300	J,Z	SS Sleeve	RTPO30G+9S**YY	RBPO30G+9S**YY	RZPO30G+9S**YY
			300		SS BB	RTPO30GZ2S**YY	RBPO30GZ2S**YY	RZPO30GZ2S**YY
		H.D. Polyolefin	250	B,E	Plain	RTHP30G+82**YY	RBHP30G+82**YY	RZHP30G+82**YY
		Nylon	300		SS Sleeve	RTNY30GE9S**YY	RBNY30GE9S**YY	RZNY30GE9S**YY
					SS Prec. BB	RTNY30GE4S**YY	RBNY30GE4S**YY	RZNY30GE4S**YY
		Phenolic	300		SS Top Hat	RTPH30GB97**YY	RBPH30GB97**YY	RZPH30GB97**YY
		H.T. Phenolic	200		SS Top Hat	RTHT30GQ97**YY	RBHT30GQ97**YY	RZHT30GQ97**YY
		BrimStone™	350		SS Top Hat	RTGN30GQ97**YY	RBGN30GQ97**YY	RZGN30GQ97**YY



RZ/RT/RB Stainless Casters - 350lb

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock Caster #	Directional Lock Caster #	Swivel Caster #
4"	1-1/4"	Yoke only				RTZZ40GZ82**YY	RBZZ40GZ82**YY	RZZZ40GZ82**YY
		Soft Rubber	350		Plain	RTSR40GB82**YY	RBSR40GB82**YY	RZSR40GB82**YY
		Thermo-Pro™	250	T,Y	^Precision	RTTP40GI44**YY	RBTP40GI44**YY	RZTP40GI44**YY
						RTTP40G+47**YY	RBTP40G+47**YY	RZTP40G+47**YY
					SS Sleeve	RTTP40G+9S**YY	RBTP40G+9S**YY	RZTP40G+9S**YY
					SS Prec. BB	RTTP40GI4S**YY	RBTP40GI4S**YY	RZTP40GI4S**YY
					Plain	RTTP40GI82**YY	RBTP40GI82**YY	RZTP40GI82**YY
		Nomadic™	300	I,L	Delrin	RTNM40G+5A**YY	RBNM40G+5A**YY	RZNM40G+5A**YY
					SS Prec. BB	RTNM40G+4S**YY	RBNM40G+4S**YY	RZNM40G+4S**YY
		Element™	240		Delrin	RTEL40GI5A**YY	RBEL40GI5A**YY	RZEL40GI5A**YY
		Poly-Pro™	350	A,D,I,S,C	^Precision	RTPP40G+44**YY	RBPP40G+44**YY	RZPP40G+44**YY
				T,Y		RTPP40G+47**YY	RBPP40G+47**YY	RZPP40G+47**YY
					SS Sleeve	RTPP40G+9S**YY	RBPP40G+9S**YY	RZPP40G+9S**YY
				K,W,P	SS BB	RTPP40G+2S**YY	RBPP40G+2S**YY	RZPP40G+2S**YY
					Delrin	RTPP40G+55**YY	RBPP40G+55**YY	RZPP40G+55**YY
					SS Prec. BB	RTPP40GI4S**YY	RBPP40GI4S**YY	RZPP40GI4S**YY
		Polymadic™	350		Delrin	RTPM40GM5A**YY	RBPM40GM5A**YY	RZPM40GM5A**YY
		Stainless Disc	270		Ball	RTUS40GLA3**YY	RBUS40GLA3**YY	RZUS40GLA3**YY
		Conductive	250		^Precision	RTCN40GH44**YY	RBCN40GH44**YY	RZCN40GH44**YY
					Precision	RTCN40GH4S**YY	RBCN40GH4S**YY	RZCN40GH4S**YY
		SteROLLizer™	300		SS Top Hat	RTBF40GC97**YY	RBBF40GC97**YY	RZBF40GC97**YY
						RTSL40GC97**YY	RBSL40GC97**YY	RZSL40GC97**YY
		DuraLastomer™	350		SS Sleeve	RTSU40GL9S**YY	RBSU40GL9S**YY	RZSU40GL9S**YY
		Hard Rubber	350		Plain	RTHR40GB82**YY	RBHR40GB82**YY	RZHR40GB82**YY
		Polyolefin	300	B,Z	Plain	RTPO40G+82**YY	RBPO40G+82**YY	RZPO40G+82**YY
			350	J,Z	SS Sleeve	RTPO40G+9S**YY	RBPO40G+9S**YY	RZPO40G+9S**YY
			350		SS BB	RTPO40GZ2S**YY	RBPO40GZ2S**YY	RZPO40GZ2S**YY
		H.D. Polyolefin	350	B,E	Plain	RTHP40G+82**YY	RBHP40G+82**YY	RZHP40G+82**YY
		Nylon	350		SS Sleeve	RTNY40GE9S**YY	RBNY40GE9S**YY	RZNY40GE9S**YY
					SS Prec. BB	RTNY40GE4S**YY	RBNY40GE4S**YY	RZNY40GE4S**YY
		Phenolic	350		SS Top Hat	RTPH40GB97**YY	RBPH40GB97**YY	RZPH40GB97**YY
		H.T. Phenolic	250		SS Top Hat	RTHT40GQ97**YY	RBHT40GQ97**YY	RZHT40GQ97**YY
		BrimStone™	300		SS Top Hat	RTGN40GQ97**YY	RBGN40GQ97**YY	RZGN40GQ97**YY

Only Superior Casters are Durable! 42



RZ/RT/RB Stainless Casters - 350lb

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	+Color	Bearing Type	Total Lock Caster #	Directional Lock Caster #	Swivel Caster #
5"	1-1/4"	Yoke only				RTZZ50GZ82**YY	RBZZ50GZ82**YY	RZZZ50GZ82**YY
		Neoprene Energizer™	300		SS Ball B.	RTEN50VB2S**YY	RBEN50GV2S**YY	RZEN50GV2S**YY
					Delrin	RTEN50VB55**YY	RBEN50GV55**YY	RZEN50GV55**YY
		SteROLLizer™	300		SS Ball B.	RTBG50VO2S**YY	RBBG50VO2S**YY	RZBG50VO2S**YY
		Soft Rubber	250		Plain	RTSR50GB82**YY	RBSR50GB82**YY	RZSR50GB82**YY
		Thermo-Pro™	300	T,Y	^Precision	RTPP50GI44**YY	RBTP50GI44**YY	RZTP50GI44**YY
						RTPP50G+47**YY	RBTP50G+47**YY	RZTP50G+47**YY
					SS Sleeve	RTPP50G+9S**YY	RBTP50G+9S**YY	RZTP50G+9S**YY
					Delrin	RTPP50GI5A**YY	RBTP50GI5A**YY	RZTP50GI5A**YY
		Nomadic™	325	I,L	SS Prec. BB	RTPP50GI4S**YY	RBTP50GI4S**YY	RZTP50GI4S**YY
					Delrin	RTNM50G+5A**YY	RBNM50G+5A**YY	RZNM50G+5A**YY
		Element™	250		SS Prec. BB	RTNM50G+4S**YY	RBNM50G+4S**YY	RZNM50G+4S**YY
		Poly-Pro™	350	I,A,D,S	^Precision	RTEL50GI5A**YY	RBEL50GI5A**YY	RZEL50GI5A**YY
				B		RTPP50G+44**YY	RBPP50G+44**YY	RZPP50G+44**YY
				T,Y		RTPP50GB82**YY	RBPP50GB82**YY	RZPP50GB82**YY
				K,W,P	Delrin	RTPP50G+47**YY	RBPP50G+47**YY	RZPP50G+47**YY
					SS Sleeve	RTPP50G+9S**YY	RBPP50G+9S**YY	RZPP50G+9S**YY
					SS BB	RTPP50G+2S**YY	RBPP50G+2S**YY	RZPP50G+2S**YY
		Polymadic™	350		Delrin	RTPP50G+55**YY	RBPP50G+55**YY	RZPP50G+55**YY
					SS Prec. BB	RTPP50GI4S**YY	RBPP50GI4S**YY	RZPP50GI4S**YY
		Polymadic™	350		Delrin	RTPM50GM5A**YY	RBPM50GM5A**YY	RZPM50GM5A**YY
		Stainless Disc	300		Delrin	RTPM50GM5A**YY	RBPM50GM5A**YY	RZPM50GM5A**YY
		Conductive	300		Ball	RTUS50GLA3**YY	RBUS50GLA3**YY	RZUS50GLA3**YY
		DuraLastomer™	275		^Precision	RTCN50GH44**YY	RBCN50GH44**YY	RZCN50GH44**YY
		Hard Rubber	350		SS Sleeve	RTSU50GL9S**YY	RBSU50GL9S**YY	RZSU50GL9S**YY
		Polyolefin	350	B,Z	SS Sleeve	RTSR50GB82**YY	RBSR50GB82**YY	RZSR50GB82**YY
			350	J,Z	Plain	RTHR50GB82**YY	RBHR50GB82**YY	RZHR50GB82**YY
		H.D. Polyolefin	350	B,E	Plain	RTPO50G+82**YY	RBPO50G+82**YY	RZPO50G+82**YY
		Nylon	350		SS Sleeve	RTPO50G+9S**YY	RBPO50G+9S**YY	RZPO50G+9S**YY
					SS Prec. BB	RTNY50GE9S**YY	RBNY50GE9S**YY	RZNY50GE9S**YY
		Phenolic	350		SS Sleeve	RTNY50GE4S**YY	RBNY50GE4S**YY	RZNY50GE4S**YY
		H.T. Phenolic	350		SS Top Hat	RTPH50GB97**YY	RBPH50GB97**YY	RZPH50GB97**YY
		BrimStone™	350		SS Top Hat	RTHT50GQ97**YY	RBHT50GQ97**YY	RZHT50GQ97**YY
					SS Top Hat	RTGN50GQ97**YY	RBGN50GQ97**YY	RZGN50GQ97**YY
6"	1-1/4"	Yoke only				RTZZ60GZ82**YY	RBZZ60GZ82**YY	RZZZ60GZ82**YY
		Thermo-Pro™	300	T,Y	^Precision	RTPP60GI44**YY	RBTP60GI44**YY	RZTP60GI44**YY
						RTPP60G+47**YY	RBTP60G+47**YY	RZTP60G+47**YY
					SS Sleeve	RTPP60G+9S**YY	RBTP60G+9S**YY	RZTP60G+9S**YY
		Poly-Pro™	350	I,A	^Precision	RTSU50GL9S**YY	RBSU50GL9S**YY	RZSU50GL9S**YY
				T,Y		RTPP60G+44**YY	RBPP60G+44**YY	RZPP60G+44**YY
				K,W,P	SS Sleeve	RTPP60G+47**YY	RBPP60G+47**YY	RZPP60G+47**YY
					SS BB	RTPP60G+9S**YY	RBPP60G+9S**YY	RZPP60G+9S**YY
		Polyolefin	350		SS BB	RTPP60G+2S**YY	RBPP60G+2S**YY	RZPP60G+2S**YY
			350	J,Z	SS Sleeve	RTPO60GZ82**YY	RBPO60GZ82**YY	RZPO60GZ82**YY
					SS Sleeve	RTPO60G+9S**YY	RBPO60G+9S**YY	RZPO60G+9S**YY



B1/B2/B3 Highly Polished Stainless Steel Casters - 1250LB



BRBRG11	BRBRG57	DLSPJ12	DLBRG57
			
(72)	(S4)	PRBRGS6	SRBSS05
			
Top Lock Brake(TY)	4 Position Locks(PY)		
			

Only Superior Casters are Durable! 44



B1/B2/B3 Highly Polished Stainless Steel Casters - 1250LB

- Formed from Grade 304 Stainless Steel, 1/4" thickness
- Mechanically polished and buffed to a smooth mirror-like reflective surface
- Stainless Steel Ball Bearings dual raceway integrated seal as standard
- Zerk fitting on the raceway. Seal temperature range is -10 to +250°F
- High-Temp grease available
- Grade 304 Stainless 5/8" kingbolt/nut
- 1/2" diameter, stainless steel zerk axle is standard
- NSF and ROHS Compliant

Applications:

- Food processing (chicken / slaughter plants)
- Pharmaceutical
- Medical waste disposal
- Around water – boating environments: fisheries, cruise ships, etc...
- Some clean rooms
- Bakeries – the larger 'dough troughs'
- Autoclaves

Fastening Pattern			
Plate Code	Overall Dimension	Bolt Hole Pattern	Mounting Bolt Size
17	4 x 4-1/2	2-5/8 x 3-5/8 to 3x3	3/8"

Size	Overall Height	Swivel Radius(B1)	Swivel Radius(B3)
4	5-5/8	3-3/8	5-5/16"
5	6-1/2	4	5-11/16"
6	7-1/2	4-1/2	5-11/16"
8	9-1/2	6	6-5/8"





B1/B2/B3 Highly Polished Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color			
					Replace ** with desired wheel bearing			
					SWIVEL	RIGID	TOTAL LOCK	Load Cap.
4	2				B1ZZ40JZ8317YY	B2ZZ40JZ8317YY	B3ZZ40JZ8317YY	
		Super-Soft	05,6S,57,12		B1SF40JIC##17YY	B2SF40JI##17YY	B3SF40JI##17YY	150
		Neo-Energizer™	05,6S,57,S4,12		B1EN40JB##17YY	B2EN40JB##17YY	B3EN40JB##17YY	500
		Ergo Blue Rubber	05,6S,57,12		B1BL40JL##17YY	B2BL40JL##17YY	B3BL40JL##17YY	400
		Nomadic™	05,6S,57,12	I,A	B1NM40J+##17YY	B2NM40J+##17YY	B3NM40J+##17YY	400
		Xtreme	S2		B1LS40JAS217YY	B2LS40JAS217YY	B3LS40JAS217YY	200
		Rubber on Nylon	05,6S,57,12		B1NR40JB##17YY	B2NR40JB##17YY	B3NR40JB##17YY	400
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y	B1TP40J+##17YY	B2TP40J+##17YY	B3TP40J+##17YY	300
		Polyolefin	05,6S,57,12	B,E	B1PO40J+##17YY	B2PO40J+##17YY	B3PO40J+##17YY	500
		Nylon	05,6S,57,12		B1NY40JE##17YY	B2NY40JE##17YY	B3NY40JE##17YY	800
		Ironman	05,6S,57,72,12	B,I	B1NX40JB##17YY	B2NX40JB##17YY	B3NX40JB##17YY	1250
		RokHard™	05,6S,57,12		B1HI40JB##17YY	B2HI40JB##17YY	B3HI40JB##17YY	800
		BrimStone™	05,6S	B,Q	B1GN40J+##17YY	B2GN40J+##17YY	B3GN40J+##17YY	800
		Epoxy	05,6S		B1OV40JQ##17YY	B2OV40JQ##17YY	B3OV40JQ##17YY	800
		MaxRok™	05,6S,57,72,12		B1MA40JB##17YY	B2MA40JB##17YY	B3MA40JB##17YY	800
		Phenolic	05,6S,57,12		B1PH40JB##17YY	B2PH40JB##17YY	B3PH40JB##17YY	800
		Phenolic(Straight Sided)	05,6S,57,12		B1PH40TB##17YY	B2PH40TB##17YY	B3PH40TB##17YY	1000
		High-Temp Pnenolic	05,6S		B1HT40JQ##17YY	B2HT40JQ##17YY	B3HT40JQ##17YY	600
		Polygon MaxRok™	05,6S,57,12	G,K	B1MU40J+##17YY	B2MU40J+##17YY	B3MU40J+##17YY	700
		Poly-Pro™	05,6S,57,12	D,K,M,U,W	B1PP40J+##17YY	B2PP40J+##17YY	B3PP40J+##17YY	500
			72		B1PP40JM7217YY	B2PP40JM7217YY	B3PP40JM7217YY	500
		Polymadic™	05,6S,57,72	I,M	B1PM40J+##17YY	B2PM40J+##17YY	B3PM40J+##17YY	600
		DuraLastomer™	6S,57,12		B1SU40JL##17YY	B2SU40JL##17YY	B3SU40JL##17YY	750
		Super Elastomer	72		B1SX40JI7217YY	B2SX40JI7217YY	B3SX40JI7217YY	1000
		ErgoLastomer™	05,6S,57,S4,12		B1HU40JI##17YY	B2HU40JI##17YY	B3HU40JI##17YY	1000
		Ultraflex™	72		B1UX40JO7217YY	B2UX40JO7217YY	B3UX40JO7217YY	900
		MaxRok™	05,6S,57,12		B1MA40JT##17YY	B2MA40JT##17YY	B3MA40JT##17YY	800

Only Superior Casters are Durable! 46



B1/B2/B3 Highly Polished Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color			
					Replace ** with desired wheel bearing			
					SWIVEL	RIGID	TOTAL LOCK	Load Cap.
5	2	Yoke Only			B1ZZ50JZ8317YY	B2ZZ50JZ8317YY	B3ZZ50JZ8317YY	
		Neo-Energizer™	05,6S,57,S4,12		B1EN50JB##17YY	B2EN50JB##17YY	B3EN50JB##17YY	550
		Ergo Blue Rubber	05,6S,57,12		B1BL50JL##17YY	B2BL50JL##17YY	B3BL50JL##17YY	500
		Nomadic™	05,6S,57,12	A,I	B1NM50J+##17YY	B2NM50J+##17YY	B3NM50J+##17YY	500
		Xtreme	S2		B1LS50JAS217YY	B2LS50JAS217YY	B3LS50JAS217YY	250
		Rubber on Nylon	05,6S,57,12		B1NR50JB##17YY	B2NR50JB##17YY	B3NR50JB##17YY	450
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y	B1TP50J+##17YY	B2TP50J+##17YY	B3TP50J+##17YY	350
		Polyolefin	05,6S,57,12	B,E	B1PO50J+##17YY	B2PO50J+##17YY	B3PO50J+##17YY	650
		Nylon	05,6S,57,12		B1NY50JE##17YY	B2NY50JE##17YY	B3NY50JE##17YY	900
		Ironman	05,6S,57,72	B,I	B1NX50J+##17YY	B2NX50J+##517YY	B3NX50JB##17YY	1250
		RokHard™	05,6S,57,12		B1HI50JB##17YY	B2HI50JB##17YY	B3HI50JB##17YY	900
		BrimStone™	05,6S	B,Q	B1GN50J+##17YY	B2GN50J+##17YY	B3GN50J+##17YY	1000
		Epoxy	05,6S		B1OV50JQ##17YY	B2OV50JQ##17YY	B3OV50JQ##17YY	1000
		MaxRok™	05,6S,57,72,12		B1MA50JB##17YY	B2MA50JB##17YY	B3MA50JB##17YY	1000
		Phenolic	05,6S,57,12		B1PH50JB##17YY	B2PH50JB##17YY	B3PH50JB##17YY	1000
		Phenolic Straight-side			B1PH50TB##17YY	B2PH50TB##17YY	B3PH50TB##17YY	1200
		H-Temp Phenolic	05,6S		B1HT50JQ##17YY	B2HT50JQ##17YY	B3HT50JQ##17YY	750
		Sterollizer™	Bronze		B1SL50JCB217YY	B2SL50JCB217YY	B3SL50JCB217YY	450
		Polyon MaxRok™	05,6S,57,12	G,K	B1MU50J+##17YY	B2MU50J+##17YY	B3MU50J+##17YY	1000
		Polyon-C	05,6S,57		B1PR50JL##17YY	B2PR50JL##17YY	B3PR50JL##17YY	900
		Poly-Pro™	05,72,57,12	B,C,D,K,U	B1PP50J+##17YY	B2PP50J+##17YY	B3PP50J+##17YY	600
			72VVV		B1PP50JM7217YY	B2PP50JM7217YY	B3PP50JM7217YY	
			72		B1PP50JM7217YY	B2PP50JM7217YY	B3PP50JM7217YY	600
			72		B1PP50JH7217YY	B2PP50JH7217YY	B3PP50JH7217YY	
		Polymadic™	05,6S,57,72,12	I,M	B1PM50J+##17YY	B2PM50J+##17YY	B3PM50J+##17YY	750
		DuraLastomer™	05,6S,57,12		B1SU50JL##17YY	B2SU50JL##17YY	B3SU50JL##17YY	800
		Super Elastomer	72		B1SX50JI7217YY	B2SX50JI7217YY	B3SX50JI7217YY	1000
		ErgoLastomer™	05,6S,57,S4,12		B1HU50JI##17YY	B2HU50JI##17YY	B3HU50JI##17YY	1250
		Ultraflex™	S4		B1UX50JOS417YY	B2UX50JOS417YY	B3UX50JOS417YY	900



B1/B2/B3 Highly Polished Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color			
					Replace ** with desired wheel bearing			
					SWIVEL	RIGID	TOTAL LOCK	Load Cap.
6	2	Yoke Only			B1ZZ60JZ8317YY	B2ZZ60JZ8317YY	B3ZZ60JZ8317YY	
		Super-Soft	05,6S,57,12		B1SF60JI##17YY	B2SF60JI##17YY	B3SF60JI##17YY	150
		Neo-Energizer™	04,05,6S,S4		B1EN60JB##17YY	B2EN60JB##17YY	B3EN60JB##17YY	600
		Ergo Blue Rubber	04,05,6S		B1BL60JL##17YY	B2BL60JL##17YY	B3BL60JL##17YY	600
		Dura-Cushion™ Wheel	04,05,6S,72	X,Z	B1BC60J##17YY	B2BC60J##17YY	B3BC60J##17YY	350
		Nomadic™	05,6S,57,12		B1NM60JB##17YY	B2NM60JB##17YY	B3NM60JB##17YY	600
		Xtreme	S2	A,I,X	B1LS60J+S217YY	B2LS60J+S217YY	B3LS60J+S217YY	350
		Rubber on Nylon	05,6S,57,12		B1NR60JB##17YY	B2NR60JB##17YY	B3NR60JB##17YY	550
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y	B1TP60J+##17YY	B2TP60J+##17YY	B3TP60J+##17YY	500
		Polyolefin	05,6S,57,12	B,E	B1PO60J+##17YY	B2PO60J+##17YY	B3PO60J+##17YY	700
		Nylon	05,6S,57,12		B1NY60JE##17YY	B2NY60JE##17YY	B3NY60JE##17YY	1000
			72		B1NY60JE7217YY	B2NY60JE7217YY	B3NY60JE7217YY	1200
		Ironman	05,6S,57,72,12	B,I	B1NX60JB##17YY	B2NX60JB##17YY	B3NX60JB##17YY	1250
		RokHard™	05,6S,57,12		B1HI60JB##17YY	B2HI60JB##17YY	B3HI60JB##17YY	1000
		BrimStone™	05,6S	B,Q	B1GN60J+##17YY	B2GN60J+##17YY	B3GN60J+##17YY	1100
		Epoxy	05,6S		B1OV60JQ##17YY	B2OV60JQ##17YY	B3OV60JQ##17YY	1100
		MaxRok™	05,6S,57,72,12		B1MA60JB##17YY	B2MA60JB##17YY	B3MA60JB##17YY	1200
		Phenolic	05,6S,57,12		B1PH60JB##17YY	B2PH60JB##17YY	B3PH60JB##17YY	1200
		Phenolic Straight-side			B1PH60TB##17YY	B2PH60TB##17YY	B3PH60TB##17YY	1250
		High-Temp Pnenolic	05,6S		B1HT60JQ##17YY	B2HT60JQ##17YY	B3HT60JQ##17YY	900
		Poly MaxRok™	05,6S,57,12	G,K	B1MU60J+##17YY	B2MU60J+##17YY	B3MU60J+##17YY	1200
		Polygon-C	05,6S,57,12		B1PR60JL##17YY	B2PR60JL##17YY	B3PR60JL##17YY	1200
		Poly-Pro™	05,6S,57,72,12	D,I,K,M,W,U	B1PP60J+##17YY	B2PP60J+##17YY	B3PP60J+##17YY	720
			72		B1PP60JM7217YY	B2PP60JM7217YY	B3PP60JM7217YY	720
			72		B1PP60JP7217YY	B2PP60JP7217YY	B3PP60JP7217YY	800
			72		B1PP60JH7217YY	B2PP60JH7217YY	B3PP60JH7217YY	
		Polymadic™	05,6S,57,72,12	I,M	B1PM60J+##17YY	B2PM60J+##17YY	B3PM60J+##17YY	900
		DuraLastomer™	05,6S,57		B1SU60JL##17YY	B2SU60JL##17YY	B3SU60JL##17YY	900
		Super Elastomer	72		B1SX60JI7217YY	B2SX60JI7217YY	B3SX60JI7217YY	1100
		ErgoLastomer™	05,6S,57,S4,12		B1HU60JI##17YY	B2HU60JI##17YY	B3HU60JI##17YY	1250
		Ultraflex™	S4		B1UX60JOS417YY	B2UX60JOS417YY	B3UX60JOS417YY	1000

Only Superior Casters are Durable! 48




B1/B2/B3 Highly Polished Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color			
					Replace ** with desired wheel bearing			
					SWIVEL	RIGID	TOTAL LOCK	Load Cap.
8	2	Yoke Only			B1ZZ80JZ8317YY	B2ZZ80JZ8317YY	B3ZZ80JZ8317YY	
		Super-Soft	05,6S,57,12		B1SF80JI##17YY	B2SF80JI##17YY	B3SF80JI##17YY	175
		Neo-Energizer™	05,6S,57,S4,12		B1EN80JB##17YY	B2EN80JB##17YY	B3EN80JB##17YY	600
		Ergo Blue Rubber	05,6S,57,72,12		B1BL80JL##17YY	B2BL80JL##17YY	B3BL80JL##17YY	700
		Dura-Cushion™ Wheel	05,6S,57,72,12	X,Z	B1BC80J+##17YY	B2BC80J+##17YY	B3BC80J+##17YY	450
		Nomadic™	05,6S,57,12	A,B,X	B1NM80J+##17YY	B2NM80J+##17YY	B3NM80J+##17YY	700
		Xtreme	S2		B1LS80JAS217YY	B2LS80JAS217YY	B3LS80JAS217YY	450
		Rubber on Nylon	05,6S,57,12		B1NR80JB##17YY	B2NR80JB##17YY	B3NR80JB##17YY	600
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	B1TP80J+##17YY	B2TP80J+##17YY	B3TP80J+##17YY	600
		Polyolefin	05,6S,57,12	B,E	B1PO80J+##17YY	B2PO80J+##17YY	B3PO80J+##17YY	900
		Nylon	05,6S,57,12		B1NY80JE##17YY	B2NY80JE##17YY	B3NY80JE##17YY	1100
			72		B1NY80JE7217YY	B2NY80JE7217YY	B3NY80JE7217YY	1300
		Ironman	05,6S,57,72,12	B,I	B1NX80JB##17YY	B2NX80JB##17YY	B3NX80JB##17YY	1250
		RokHard™	05,6S,57,12		B1HI80JB##17YY	B2HI80JB##17YY	B3HI80JB##17YY	1100
		BrimStone™	05,6S	B,Q	B1GN80J+##17YY	B2GN80J+##17YY	B3GN80J+##17YY	1200
		Epoxy	05,6S		B1OV80JQ##17YY	B2OV80JQ##17YY	B3OV80JQ##17YY	1200
		MaxRok™	05,6S,57,72,12		B1MA80JB##17YY	B2MA80JB##17YY	B3MA80JB##17YY	1250
		Phenolic	05,6S,57		B1PH80JB##17YY	B2PH80JB##17YY	B3PH80JB##17YY	1250
		High-Temp Pnenolic	05,6S		B1HT80JQ##17YY	B2HT80JQ##17YY	B3HT80JQ##17YY	1100
		Poly MaxRok™	05,6S,57,12	G,K	B1MU80J+##17YY	B2MU80J+##17YY	B3MU80J+##17YY	1250
		Poly-Pro™	05,6S,57,72,12	C,D,I,K,M,U,W	B1PP80J+##17YY	B2PP80J+##17YY	B3PP80J+##17YY	800
			72		B1PP80JM7217YY	B2PP80JM7217YY	B3PP80JM7217YY	800
			72		B1PP80JP7217YY	B2PP80JP7217YY	B3PP80JP7217YY	1000
			72		B1PP80JH7217YY	B2PP80JH7217YY	B3PP80JH7217YY	1000
		Polymadic™	05,6S,57,72,12	I,M	B1PM80J+##17YY	B2PM80J+##17YY	B3PM80J+##17YY	1000
		DuraLastomer™	05,6S,57,12		B1SU80JL##17YY	B2SU80JL##17YY	B3SU80JL##17YY	1000
		Super Elastomer	72		B1SX80JI7217YY	B2SX80JI7217YY	B3SX80JI7217YY	1200
		ErgoLastomer™	05,6S,57,S4,12		B1HU80JI##17YY	B2HU80JI##17YY	B3HU80JI##17YY	1250
		Ultraflex™	S4		B1UX80JOS417YY	B2UX80JOS417YY	B3UX80JOS417YY	1200



31/32/TS Medium Duty Stainless Steel Casters - 1250LB

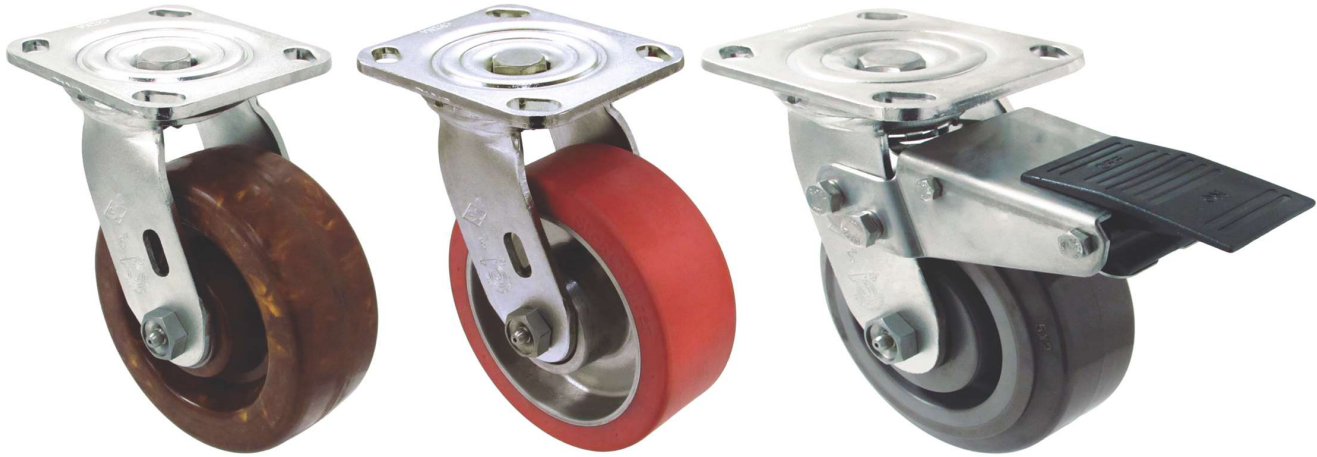

- Formed from Grade 304 Stainless Steel, 1/4" thickness
- 5/8" Kingbolt/nut
- Electrolytic polishing to a shining and smooth finish
- Stainless Steel Ball Bearings dual raceway
- Zerk fitting on the raceway
- Grade 304 Stainless king bolt/nut
- 1/2" diameter, stainless steel zerk axle as standard
- NSF and ROHS Compliant

Applications:

- Food processing (chicken / slaughter plants)
- Pharmaceutical, medical/hospital and Laboratories
- Medical waste disposal
- Around water – boating environments, fisheries, cruise ship, etc...
- Some clean rooms
- Bakeries – the larger 'dough troughs'
- Autoclaves

Fastening Pattern			
Plate Code	Overall Dimension	Bolt Hole Pattern	Mounting Bolt Size
17	4 x 4-1/2	2-5/8 x 3-5/8 to 3x3	3/8

Size	Overall Height	Swivel Radius(31)	Swivel Radius(TS)
4	5-5/8	3-3/16	6-1/4
5	6-1/2	4	6-1/4
6	7-1/2	4-9/16	6-1/4
8	9-1/2	6	7-1/8

Only Superior Casters are Durable! 50



31/32/TS Medium Duty Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (**)	Color (+)	Replace + with a desired wheel color			
					Replace ** with desired wheel bearing			
					SWIVEL	RIGID	TOTAL LOCK	Load Cap.
4	2				31ZZ40JZ8317YY	32ZZ40JZ8317YY	TSZZ40JZ8317YY	
		Super-Soft	05,6S,57,12		31SF40JI**17YY	32SF40JI**17YY	TSSF40JI**17YY	150
		Neo-Energizer™	05,6S,57,S4,12		31EN40JB**17YY	32EN40JB**17YY	TSEN40JB**17YY	500
		Ergo Blue Rubber	05,6S,57,12		31BR40JL**17YY	32BR40JL**17YY	TSBR40JL**17YY	400
		Nomadic™	05,6S,57,12	I,X,A,Z	31NM40J+**17YY	32NM40J+**17YY	TSNM40J+**17YY	400
		Xtreme	S2		31LS40JAS217YY	32LS40JAS217YY	TSLS40JAS217YY	350
		Rubber on Nylon	05,6S,57,12		31NR40JB**17YY	32NR40JB**17YY	TSNR40JB**17YY	400
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	31TP40J+**17YY	32TP40J+**17YY	TSTP40J+**17YY	300
		Polyolefin	05,6S,57,12	B,E	31PO40J+**17YY	32PO40J+**17YY	TSPO40J+**17YY	500
		Nylon	05,6S,57,12		31NY40JE**17YY	32NY40JE**17YY	TSNY40JE**17YY	800
		Ironman	05,6S,57,72,12	B,I	31NX40JB**17YY	32NX40JB**17YY	TSNX40JB**17YY	1250
		RokHard™	05,6S,57,12		31HI40JB**17YY	32HI40JB**17YY	TSHI40JB**17YY	800
		BrimStone™	05,6S,57,12	B,Q	31GN40J+**17YY	32GN40J+**17YY	TSGN40J+**17YY	800
		Epoxy	05,6S,57,12		31OV40JQ**17YY	32OV40JQ**17YY	TSOV40JQ**17YY	800
		MaxRok™	05,6S,57,72,12		31MA40JB**17YY	32MA40JB**17YY	TSMA40JB**17YY	800
		Phenolic	05,6S,57,12		31PH40JB**17YY	32PH40JB**17YY	TSPH40JB**17YY	800
		Phenolic(Straight Sided)	05,6S,57,12		31PH40TB**17YY	32PH40TB**17YY	TSPH40TB**17YY	1000
		High-Temp Pnenolic	05,6S,57,12		31HT40JQ**17YY	32HT40JQ**17YY	TSHT40JQ**17YY	600
		Polygon MaxRok™	05,6S,57,12	G,K	31MU40J+**17YY	32MU40J+**17YY	TSMU40J+**17YY	700
		Poly-Pro™	05,6S,57,12	D,K,M,U,W	31PP40J+**17YY	32PP40J+**17YY	TSPP40J+**17YY	500
					31PP40JM7217YY	32PP40JM7217YY	TSPP40JM7217YY	500
		Polymadic™	05,6S,57,72,12	I,M	31PM40J+**17YY	32PM40J+**17YY	TSPM40J+**17YY	600
		DuraLastomer™	6S,57,12		31SU40JL**17YY	32SU40JL**17YY	TSSU40JL**17YY	750
		Super Elastomer	72		31SX40JI7217YY	32SX40JI7217YY	TSSX40JI7217YY	1000
		ErgoLastomer™	05,6S,57,S4,12		31HU40JI**17YY	32HU40JI**17YY	TSHU40JI**17YY	1000
		Ultraflex™	72		31UX40JO7217YY	32UX40JO7217YY	TSUX40JO7217YY	900
		MaxRok™	05,6S,57,12		31MV40JT**17YY	32MV40JT**17YY	TSMV40JT**17YY	800



31/32/TS Medium Duty Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (**)	Color (+)	Replace + with a desired wheel color			
					Replace ** with desired wheel bearing			
					SWIVEL	RIGID	TOTAL LOCK	Load Cap.
					Part #			
5	2	Yoke Only			31ZZ50JZ8317YY	32ZZ50JZ8317YY	TSZZ50JZ8317YY	
		Neo-Energizer™	05,6S,57,S4,12		31EN50JB**17YY	32EN50JB**17YY	TSEN50JB**17YY	550
		Ergo Blue Rubber	05,6S,57,12		31BR50JL**17YY	32BR50JL**17YY	TSBR50JL**17YY	500
		Super-Soft	05,6S,57,12		31SF50JI**17YY	32SF50JI**17YY	TSSF50JI**17YY	150
		Nomadic™	05,6S,57,12	B,I	31NM50J+**17YY	32NM50J+**17YY	TSNM50J+**17YY	500
		Xtreme	S2		31LS50JAS217YY	32LS50JAS217YY	TSLS50JAS217YY	400
		Rubber on Nylon	05,6S,57,12		31NR50JB**17YY	32NR50JB**17YY	TSNR50JB**17YY	450
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	31TP50J+**17YY	32TP50J+**17YY	TSTP50J+**17YY	350
		Polyolefin	05,6S,57,12	B,E	31PO50J+**17YY	32PO50J+**17YY	TSPO50J+**17YY	650
		Nylon	05,6S,57,12		31NY50JE**17YY	32NY50JE**17YY	TSNY50JE**17YY	900
		Ironman	05,6S,57,72,12	B,I	31NX50JB**17YY	32NX50JB**517YY	TSNX50JB**17YY	1250
		RokHard™	05,6S,57,12		31HI50JB**17YY	32HI50JB**17YY	TSHI50JB**17YY	900
		BrimStone™	05,6S,57,12	B,Q	31GN50J+**17YY	32GN50J+**17YY	TSGN50J+**17YY	1000
		Epoxy	05,6S,57,12		31OV50JQ**17YY	32OV50JQ**17YY	TSOV50JQ**17YY	1000
		MaxRok™	05,6S,57,72,12		31MA50JB**17YY	32MA50JB**17YY	TSMA50JB**17YY	1000
		Phenolic	05,6S,57,12		31PH50JB**17YY	32PH50JB**17YY	TSPH50JB**17YY	1000
		Phenolic Straight-side			31PH50TB**17YY	32PH50TB**17YY	TSPH50TB**17YY	1200
		High-Temp Phenolic	05,6S,57,12		31HT50JQ**17YY	32HT50JQ**17YY	TSHT50JQ**17YY	750
		Sterollizer™			31SL50JCB217YY	32SL50JCB217YY	TSSL50JCB217YY	450
		Polygon MaxRok™	05,6S,57,12	G,K	31MU50J+**17YY	32MU50J+**17YY	TSMU50J+**17YY	1000
		Polygon-C	05,6S,57,12		31PR50JL**17YY	32PR50JL**17YY	TSPR50JL**17YY	900
		Poly-Pro™	05,6S,57,12	B,C,D,K,U,M,W	31PP50J+**17YY	32PP50J+**17YY	TSPP50J+**17YY	600
					31PP50JM7217YY	32PP50JM7217YY	TSPP50JM7217YY	600
					31PP50JP7217YY	32PP50JP7217YY	TSPP50JP7217YY	700
					31PP50JH7217YY	32PP50JH7217YY	TSPP50JH7217YY	
		Polymadic™	05,6S,57,72,12	I,M	31PM50J+**17YY	32PM50J+**17YY	TSPM50J+**17YY	750
		DuraLastomer™	05,6S,57,12		31SU50JL**17YY	32SU50JL**17YY	TSSU50JL**17YY	800
		Super Elastomer			31SX50JI7217YY	32SX50JI7217YY	TSSX50JI7217YY	1000
		ErgoLastomer™	05,6S,57,S4,12		31HU50JI**17YY	32HU50JI**17YY	TSHU50JI**17YY	1250
		Ultraflex™	S4		31UX50JOS417YY	32UX50JOS417YY	TSUX50JOS417YY	900

Only Superior Casters are Durable! 52



31/32/TS Medium Duty Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (**)	Color (+)	Replace + with a desired wheel color			
					Replace ** with desired wheel bearing			
					SWIVEL	RIGID	TOTAL LOCK	Load Cap.
					Part #			
6	2	Yoke Only			31ZZ60JZ8317YY	32ZZ60JZ8317YY	TSZZ60JZ8317YY	
		Super-Soft	05,6S,57,12		31SF60JI**17YY	32SF60JI**17YY	TSSF60JI**17YY	150
		Neo-Energizer™	04,05,6S,S4		31EN60JB**17YY	32EN60JB**17YY	TSEN60JB**17YY	600
		Ergo Blue Rubber	04,05,6S		31BR60JL**17YY	32BR60JL**17YY	TBR60JL**17YY	600
		Dura-Cushion™ Wheel	04,05,6S,72	X,Z	31BC60J+**17YY	32BC60J+**17YY	TSBC60J+**17YY	650
		Nomadic™	05,6S,57,12		31NM60JB**17YY	32NM60JB**17YY	TSNM60JB**17YY	600
		Xtreme	S2		31LS60JAS217YY	32LS60JAS217YY	TSLS60JAS217YY	550
		Rubber on Nylon	05,6S,57,12		31NR60JB**17YY	32NR60JB**17YY	TSNR60JB**17YY	550
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	31TP60J+**17YY	32TP60J+**17YY	TSTP60J+**17YY	500
		Polyolefin	05,6S,57,12	B,E	31PO60J+**17YY	32PO60J+**17YY	TSPO60J+**17YY	700
		Nylon	05,6S,57,12		31NY60JE**17YY	32NY60JE**17YY	TSNY60JE**17YY	1000
			72		31NY60JE7217YY	32NY60JE7217YY	TSNY60JE7217YY	1200
		Ironman	05,6S,57,72,12	B,I	31NX60JB**17YY	32NX60JB**17YY	TSNX60JB**17YY	1250
		RokHard™	05,6S,57,12		31HI60JB**17YY	32HI60JB**17YY	TSHI60JB**17YY	1000
		BrimStone™	05,6S,57,12	B,Q	31GN60J+**17YY	32GN60J+**17YY	TSGN60J+**17YY	1100
		Epoxy	05,6S,57,12		31OV60JQ**17YY	32OV60JQ**17YY	TSOV60JQ**17YY	1100
		MaxRok™	05,6S,57,72,12		31MA60JB**17YY	32MA60JB**17YY	TSMA60JB**17YY	1200
		Phenolic	05,6S,57,12		31PH60JB**17YY	32PH60JB**17YY	TSPH60JB**17YY	1200
		Phenolic Straight-side			31PH60TB**17YY	32PH60TB**17YY	TSPH60TB**17YY	1250
		High-Temp Phenolic	05,6S,57,12		31HT60JQ**17YY	32HT60JQ**17YY	TSHT60JQ**17YY	900
		Poly MaxRok™	05,6S,57,12	G,K	31MU60J+**17YY	32MU60J+**17YY	TSMU60J+**17YY	1200
		Polygon-C	05,6S,57,12		31PR60JL**17YY	32PR60JL**17YY	TSPR60JL**17YY	1200
		Poly-Pro™	05,6S,57,72,12	D,I,K,M,W,U	31PP60J+**17YY	32PP60J+**17YY	TSPP60J+**17YY	720
					31PP60JM7217YY	32PP60JM7217YY	TSPP60JM7217YY	720
					31PP60JP7217YY	32PP60JP7217YY	TSPP60JP7217YY	800
					31PP60JH7217YY	32PP60JH7217YY	TSPP60JH7217YY	
		Polymadic™	05,6S,57,72,12	I,M	31PM60J+**17YY	32PM60J+**17YY	TSPM60J+**17YY	900
		DuraLastomer™	05,6S,57,12		31SU60JL**17YY	32SU60JL**17YY	TSSU60JL**17YY	900
		Super Elastomer	72		31SX60JI7217YY	32SX60JI7217YY	TSSX60JI7217YY	1100
		ErgoLastomer™	05,6S,57,S4,12		31HU60JI**17YY	32HU60JI**17YY	TSHU60JI**17YY	1250
		Ultraflex™	S4		31UX60JOS417YY	32UX60JOS417YY	TSUX60JOS417YY	1000



31/32/TS Medium Duty Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (**)	Color (+)	Replace + with a desired wheel color			
					Replace ** with desired wheel bearing			
					SWIVEL	RIGID	TOTAL LOCK	Load Cap.
					Part #			
8	2	Yoke Only			31ZZ80JZ8317YY	32ZZ80JZ8317YY	TSZZ80JZ8317YY	
		Super-Soft	05,6S,57,12		31SF80JI**17YY	32SF80JI**17YY	TSSF80JI**17YY	175
		Neo-Energizer™	05,6S,57,S4,12		31EN80JB**17YY	32EN80JB**17YY	TSEN80JB**17YY	600
		Ergo Blue Rubber	05,6S,57,72,12		31BR80JL**17YY	32BR80JL**17YY	TSBR80JL**17YY	700
		Dura-Cushion™ Wheel	05,6S,57,72,12		31BC80J+***17YY	32BC80J+***17YY	TSBC80J+***17YY	700
		Nomadic™	05,6S,57,12	B,I	31NM80J+***17YY	32NM80J+***17YY	TSNM80J+***17YY	700
		Xtreme	S2		31LS80JAS217YY	32LS80JAS217YY	TSLS80JAS217YY	650
		Rubber on Nylon	05,6S,57,12		31NR80JB**17YY	32NR80JB**17YY	TSNR80JB**17YY	600
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	31TP80J+***17YY	32TP80J+***17YY	TSTP80J+***17YY	600
		Polyolefin	05,6S,57,12	B,E	31PO80J+***17YY	32PO80J+***17YY	TSPO80J+***17YY	900
		Nylon	05,6S,57,12		31NY80JE**17YY	32NY80JE**17YY	TSNY80JE**17YY	1100
			72		31NY80JE7217YY	32NY80JE7217YY	TSNY80JE7217YY	1250
		Ironman	05,6S,57,72,12	B,I	31NX80JB**17YY	32NX80JB**17YY	TSNX80JB**17YY	1250
		RokHard™	05,6S,57,12		31HI80JB**17YY	32HI80JB**17YY	TSHI80JB**17YY	1100
		BrimStone™	05,6S,57,12	B,Q	31GN80J+***17YY	32GN80J+***17YY	TSGN80J+***17YY	1200
		Epoxy	05,6S,57,12		31OV80JQ**17YY	32OV80JQ**17YY	TSOV80JQ**17YY	1200
		MaxRok™	05,6S,57,72,12		31MA80JB**17YY	32MA80JB**17YY	TSMA80JB**17YY	1250
		Phenolic	05,6S,57,12		31PH80JB**17YY	32PH80JB**17YY	TSPH80JB**17YY	1250
		High-Temp Phenolic	05,6S,57,12		31HT80JQ**17YY	32HT80JQ**17YY	TSHT80JQ**17YY	1100
		Poly MaxRok™	05,6S,57,12	G,K	31MU80J+***17YY	32MU80J+***17YY	TSMU80J+***17YY	1250
		Poly-Pro™	05,6S,57,72,12	C,D,I,K,M,U,W	31PP80J+***17YY	32PP80J+***17YY	TSPP80J+***17YY	800
					31PP80JM7217YY	32PP80JM7217YY	TSPP80JM7217YY	800
			72		31PP80JP7217YY	32PP80JP7217YY	TSPP80JP7217YY	1000
			72		31PP80JH7217YY	32PP80JH7217YY	TSPP80JH7217YY	1000
		Polymadic™	05,6S,57,72,12	I,M	31PM80J+***17YY	32PM80J+***17YY	TSPM80J+***17YY	1000
		DuraLastomer™	05,6S,57,12		31SU80JL**17YY	32SU80JL**17YY	TSSU80JL**17YY	1000
		Super Elastomer	72		31SX80JI7217YY	32SX80JI7217YY	TSSX80JI7217YY	1200
		ErgoLastomer™	05,6S,57,S4,12		31HU80JI**17YY	32HU80JI**17YY	TSHU80JI**17YY	1250
		Ultraflex™	S4		31UX80JOS417YY	32UX80JOS417YY	TSUX80JOS417YY	1200

Only Superior Casters are Durable! 54



S5/S6 Medium Duty Kingpinless SS Casters - 1250LB



- Legs formed from 1/4" thick 304 SS and double welded to the outer raceway for maximum strength
- 1/4" thick 304 SS top plate
- Precisely machined from 304 Stainless steel
- 2-3/8" diameter raceway with 3/8" stainless ball bearings
- Electrolytic polishing to a shining and smooth finish
- Zerk fitting on the raceway
- 1/2" diameter, stainless steel zerk axle as standard
- NSF and ROHS Compliant
- 100% washable

Applications:

- Food processing (chicken / slaughter plants)
- Pharmaceutical, medical/hospital and Laboratories
- Medical waste disposal
- Around water – boating environments, fisheries, cruise ship, etc...
- Some clean rooms
- Bakeries – the larger 'dough troughs'
- Autoclaves

Fastening Pattern			
Plate Code	Overall Dimension	Bolt Hole Pattern	Mounting Bolt Size
17	4 x 4-1/2	2-5/8 x 3-5/8 to 3x3	3/8

Size	Overall Height	Swivel Radius
4	5-5/8	3-1/8
5	6-1/2	3-7/8
6	7-1/2	4-1/2
8	9-1/2	5-15/16



S5/S6 Medium Duty Kingpinless SS Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color		
					Replace ## with desired wheel bearing		
					SWIVEL	RIGID	Load Cap.
					Part #		
4	2				S5ZZ40JZ8317YY	S6ZZ40JZ8317YY	
		Super-Soft	05,6S,57,12		S5SF40JI##17YY	S6SF40JI##17YY	150
		Neo-Energizer™	05,6S,57,S4,12		S5EN40JB##17YY	S6EN40JB##17YY	500
		Ergo Blue Rubber	05,6S,57,12		S5BR40JL##17YY	S6BR40JL##17YY	400
		Nomadic™	05,6S,57,12	I,X,A,Z	S5NM40J+##17YY	S6NM40J+##17YY	400
		Xtreme	S2		S5LS40JAS217YY	S6LS40JAS217YY	350
		Rubber on Nylon	05,6S,57,12		S5NR40JB##17YY	S6NR40JB##17YY	400
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	S5TP40J+##17YY	S6TP40J+##17YY	300
		Polyolefin	05,6S,57,12	B,E	S5PO40J+##17YY	S6PO40J+##17YY	500
		Nylon	05,6S,57,12		S5NY40JE##17YY	S6NY40JE##17YY	800
		Ironman	05,6S,57,72,12	B,I	S5NX40JB##17YY	S6NX40JB##17YY	1250
		RokHard™	05,6S,57,12		S5HI40JB##17YY	S6HI40JB##17YY	800
		BrimStone™	05,6S	B,Q	S5GN40J+##17YY	S6GN40J+##17YY	800
		Epoxy	05,6S		S5OV40JQ##17YY	S6OV40JQ##17YY	800
		MaxRok™	05,6S,57,72,12		S5MA40JB##17YY	S6MA40JB##17YY	800
		Phenolic	05,6S,57,12		S5PH40JB##17YY	S6PH40JB##17YY	800
		Phenolic Straight-Side	05,6S,57,12		S5PH40TB##17YY	S6PH40TB##17YY	1000
		High-Temp Phenolic	05,6S		S5HT40JQ##17YY	S6HT40JQ##17YY	600
		Polyon MaxRok™	05,6S,57,12	G,K	S5MU40J+##17YY	S6MU40J+##17YY	700
		Poly-Pro™	05,6S,57,12	D,K,M,U,W	S5PP40J+##17YY	S6PP40J+##17YY	500
			72		S5PP40JM7217YY	S6PP40JM7217YY	500
		Polymadic™	05,6S,57,72,12	I,M	S5PM40J+##17YY	S6PM40J+##17YY	600
		DuraLastomer™	6S,57,12		S5SU40JL##17YY	S6SU40JL##17YY	750
		Super Elastomer	72		S5SX40JI7217YY	S6SX40JI7217YY	1000
		ErgoLastomer™	05,6S,57,S4,12		S5HU40JI##17YY	S6HU40JI##17YY	1000
		Ultraflex™	72		S5UX40JO7217YY	S6UX40JO7217YY	900
		MaxRok™ V-Groove	05,6S,57,12		S5MV40JT##17YY	S6MV40JT##17YY	800

Only Superior Casters are Durable! 56



S5/S6 Medium Duty Kingpinless SS Casters - 1250LB

Wheel Diameter	Thread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color		
					Replace ## with desired wheel bearing		
					SWIVEL	RIGID	Load Cap.
					Part #		
5	2	Yoke Only			S5ZZ50JZ8317YY	S6ZZ50JZ8317YY	
		Neo-Energizer™	05,6S,57,S4,12		S5EN50JB##17YY	S6EN50JB##17YY	550
		Ergo Blue Rubber	05,6S,57,12		S5BR50JL##17YY	S6BR50JL##17YY	500
		Super-Soft	05,6S,57,12		S5SF50JI##17YY	S6SF50JI##17YY	150
		Nomadic™	05,6S,57,12	B,I	S5NM50J+##17YY	S6NM50J+##17YY	500
		Xtreme	S2		S5LS50JAS217YY	S6LS50JAS217YY	400
		Rubber on Nylon	05,6S,57,12		S5NR50JB##17YY	S6NR50JB##17YY	450
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	S5TP50J+##17YY	S6TP50J+##17YY	350
		Polyolefin	05,6S,57,12	B.E	S5PO50J+##17YY	S6PO50J+##17YY	650
		Nylon	05,6S,57,12		S5NY50JE##17YY	S6NY50JE##17YY	900
		Ironman	05,6S,57,72,12	B,I	S5NX50JB##17YY	S6NX50JB##17YY	1250
		RokHard™	05,6S,57,12		S5HI50JB##17YY	S6HI50JB##17YY	900
		BrimStone™	05,6S	B,Q	S5GN50J+##17YY	S6GN50J+##17YY	1000
		Epoxy	05,6S		S5OV50JQ##17YY	S6OV50JQ##17YY	1000
		MaxRok™	05,6S,57,72,12		S5MA50JB##17YY	S6MA50JB##17YY	1000
		Phenolic	05,6S,57,12		S5PH50JB##17YY	S6PH50JB##17YY	1000
		Phenolic Straight-Side			S5PH50TB##17YY	S6PH50TB##17YY	1200
		Hi-Temp Phenolic	05,6S		S5HT50JQ##17YY	S6HT50JQ##17YY	750
		Sterollizer™	Bronze		S5SL50JCB217YY	S6SL50JCB217YY	450
		Polygon MaxRok™	05,6S,57,12	G,K	S5MU50J+##17YY	S6MU50J+##17YY	1000
		Polygon-C	05,6S,57,12		S5PR50JL##17YY	S6PR50JL##17YY	900
		Poly-Pro™	05,6S,57,12	B,C,D,K,U,M,W	S5PP50J+##17YY	S6PP50J+##17YY	600
			72		S5PP50JM7217YY	S6PP50JM7217YY	600
			72		S5PP50JP7217YY	S6PP50JP7217YY	700
			72		S5PP50JH7217YY	S6PP50JH7217YY	
		Polymadic™	05,6S,57,72,12	I,M	S5PM50J+##17YY	S6PM50J+##17YY	750
		DuraLastomer™	05,6S,57,12		S5SU50JL##17YY	S6SU50JL##17YY	800
		Super Elastomer	72		S5SX50JI7217YY	S6SX50JI7217YY	1000
		ErgoLastomer™	05,6S,57,S4,12		S5HU50JI##17YY	S6HU50JI##17YY	1250
		Ultraflex™	S4		S5UX50JOS417YY	S6UX50JOS417YY	900



S5/S6 Medium Duty Kingpinless SS Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color		
					Replace ## with desired wheel bearing		
					SWIVEL	RIGID	Load Cap.
					Part #		
6	2	Yoke Only			S5ZZ60JZ8317YY	S6ZZ60JZ8317YY	
		Super-Soft	05,6S,57,12		S5SF60JI##17YY	S6SF60JI##17YY	150
		Neo-Energizer™	04,05,6S,S4		S5EN60JB##17YY	S6EN60JB##17YY	600
		Ergo Blue Rubber	04,05,6S		S5BR60JL##17YY	S6BR60JL##17YY	600
		Dura-Cushion™ Wheel	04,05,6S,72	X,Z	S5BC60J+##17YY	S6BC60J+##17YY	650
		Nomadic™	05,6S,57,12		S5NM60JB##17YY	S6NM60JB##17YY	600
		Xtreme	S2		S5LS60JAS217YY	S6LS60JAS217YY	550
		Rubber on Nylon	05,6S,57,12		S5NR60JB##17YY	S6NR60JB##17YY	550
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	S5TP60J+##17YY	S6TP60J+##17YY	500
		Polyolefin	05,6S,57,12	B,E	S5PO60J+##17YY	S6PO60J+##17YY	700
		Nylon	05,6S,57,12		S5NY60JE##17YY	S6NY60JE##17YY	1000
			72		S5NY60JE7217YY	S6NY60JE7217YY	1200
		Ironman	05,6S,57,72,12	B,I	S5NX60JB##17YY	S6NX60JB##17YY	1250
		RokHard™	05,6S,57		S5HI60JB##17YY	S6HI60JB##17YY	1000
		BrimStone™	05,6S	B,Q	S5GN60J+##17YY	S6GN60J+##17YY	1100
		Epoxy	05,6S		S5OV60JQ##17YY	S6OV60JQ##17YY	1100
		MaxRok™	05,6S,57,72,12		S5MA60JB##17YY	S6MA60JB##17YY	1200
		Phenolic	05,6S,57		S5PH60JB##17YY	S6PH60JB##17YY	1200
		Phenolic Straight-Side			S5PH60TB##17YY	S6PH60TB##17YY	1250
		High-Temp Phenolic	05,6S		S5HT60JQ##17YY	S6HT60JQ##17YY	900
		Poly MaxRok™	05,6S,57,12	G,K	S5MU60J+##17YY	S6MU60J+##17YY	1200
		Polygon-C	05,6S,57,12		S5PR60JL##17YY	S6PR60JL##17YY	1200
		Poly-Pro™	05,6S,57,72,12	D,I,K,M,W,U	S5PP60J+##17YY	S6PP60J+##17YY	720
			72		S5PP60JM7217YY	S6PP60JM7217YY	720
			72		S5PP60JP7217YY	S6PP60JP7217YY	800
			72		S5PP60JH7217YY	S6PP60JH7217YY	
		Polymadic™	05,6S,57,72,12	I,M	S5PM60J+##17YY	S6PM60J+##17YY	900
		DuraLastomer™	05,6S,57,12		S5SU60JL##17YY	S6SU60JL##17YY	900
		Super Elastomer	72		S5SX60JI7217YY	S6SX60JI7217YY	1100
		ErgoLastomer™	05,6S,57,S4,12		S5HU60JI##17YY	S6HU60JI##17YY	1250
		Ultraflex™	S4		S5UX60JOS417YY	S6UX60JOS417YY	1000

Only Superior Casters are Durable! 58



S5/S6 Medium Duty Kingpinless SS Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color		
					Replace ## with desired wheel bearing		
					SWIVEL	RIGID	Load Cap.
					Part #		
8	2	Yoke Only			S5ZZ80JZ8317YY	S6ZZ80JZ8317YY	
		Super-Soft	05,6S,57,12		S5SF80JL##17YY	S6SF80JL##17YY	175
		Neo-Energizer™	05,6S,57,S4,12		S5EN80JB##17YY	S6EN80JB##17YY	600
		Ergo Blue Rubber	05,6S,57,72,12		S5BR80JL##17YY	S6BR80JL##17YY	700
		Dura-Cushion™ Wheel	05,6S,57,72,12		S5BC80J+##17YY	S6BC80J+##17YY	700
		Nomadic™	05,6S,57,12	B,I	S5NM80J+##17YY	S6NM80J+##17YY	700
		Xtreme	S2		S5LS80JAS217YY	S6LS80JAS217YY	650
		Rubber on Nylon	05,6S,57,12		S5NR80JB##17YY	S6NR80JB##17YY	600
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	S5TP80J+##17YY	S6TP80J+##17YY	600
		Polyolefin	05,6S,57,12	B,E	S5PO80J+##17YY	S6PO80J+##17YY	900
		Nylon	05,6S,57,12		S5NY80JE##17YY	S6NY80JE##17YY	1100
			72		S5NY80JE7217YY	S6NY80JE7217YY	1250
		Ironman	05,6S,57,72,12	B,I	S5NX80JB##17YY	S6NX80JB##17YY	1250
		RokHard™	05,6S,57,12		S5HI80JB##17YY	S6HI80JB##17YY	1100
		BrimStone™	05,6S	B,Q	S5GN80J+##17YY	S6GN80J+##17YY	1200
		Epoxy	05,6S		S5OV80JQ##17YY	S6OV80JQ##17YY	1200
		MaxRok™	05,6S,57,72,12		S5MA80JB##17YY	S6MA80JB##17YY	1250
		Phenolic	05,6S,57,12		S5PH80JB##17YY	S6PH80JB##17YY	1250
		High-Temp Phenolic	05,6S		S5HT80JQ##17YY	S6HT80JQ##17YY	1100
		Poly MaxRok™	05,6S,57,12	G,K	S5MU80J+##17YY	S6MU80J+##17YY	1250
		Poly-Pro™	05,6S,57,72,12	C,D,I,K,M,U,W	S5PP80J+##17YY	S6PP80J+##17YY	800
			72		S5PP80JM7217YY	S6PP80JM7217YY	800
			72		S5PP80JP7217YY	S6PP80JP7217YY	1000
			72		S5PP80JH7217YY	S6PP80JH7217YY	1000
		Polymadic™	05,6S,57,72,12	I,M	S5PM80J+##17YY	S6PM80J+##17YY	1000
		DuraLastomer™	05,6S,57,12		S5SU80JL##17YY	S6SU80JL##17YY	1000
		Super Elastomer	72		S5SX80JI7217YY	S6SX80JI7217YY	1200
		ErgoLastomer™	05,6S,57,S4,12		S5HU80JL##17YY	S6HU80JL##17YY	1250
		Ultraflex™	S4		S5UX80JOS417YY	S6UX80JOS417YY	1200



4S Modular Kingpinless Stainless Steel Casters - 1250LB



- Modular design offers flexibility with a variety of standard and hard to find stem options
- Precisely machined from 304 Stainless steel
- 2-3/8" diameter raceway with 3/8" stainless ball bearings and zerk fitting
- 3/4" hexagon mounting hole to secure the modular stem
- Electrolytic polishing to a shining and smooth finish
- 1/2" diameter, stainless steel zerk axle as standard
- NSF and ROHS Compliant

Applications:

- Food processing (chicken / slaughter plants)
- Pharmaceutical, medical/hospital and laboratories
- Around water – boating environments, fisheries, cruise ship, etc...
- Some clean rooms
- Bakeries – the larger 'dough troughs'
- Autoclaves

Fastening Pattern		
Stem Code	Overall Dimension	Stem Part #
ZZ	3/4" Hexagon Hole	ZZ
S1	1/2 - 13 X 4	4SSTS1
T1	3/4 - 10 X 2.5	4SSTT1
S7	3/4 - 10 X 4	4SSTS7
D7	3/4 - 10 X 4.5	4SSTD7
S3	3/4 - 10 X 6	4SSTS3
T2	1 - 8 X 2.5	4SSTT2
C7	1 - 8 X 4	4SSTC7
D1	1 - 8 X 6.25	4SSTD1

Size	Overall Height	Swivel Radius
4	5-7/16	3-1/4
5	6-5/16	3-7/8
6	7-5/16	4-9/16
8	9-5/16	5-15/16

Only Superior Casters are Durable! 60



4S Modular Kingpinless Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color	
					Replace ## with desired wheel bearing	
					SWIVEL	Load Cap.
					Part #	
4	2				4SZZ40JZ83**YY	
		Super-Soft	05,6S,57,12		4SSF40JL##**YY	150
		Neo-Energizer™	05,6S,57,S4,12		4SEN40JB##**YY	500
		Ergo Blue Rubber	05,6S,57,12		4SBR40JL##**YY	400
		Nomadic™	05,6S,57,12	I,X,A,Z	4SNM40J+##**YY	400
		Xtreme	S2		4SLS40JAS2**YY	350
		Rubber on Nylon	05,6S,57,12		4SNR40JB##**YY	400
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	4STP40J+##**YY	300
		Polyolefin	05,6S,57,12	B,E	4SPO40J+##**YY	500
		Nylon	05,6S,57,12		4SNY40JE##**YY	800
		Ironman	05,6S,57,72,12	B,I	4SNX40JB##**YY	1250
		RokHard™	05,6S,57,12		4SHI40JB##**YY	800
		BrimStone™	05,6S	B,Q	4SGN40J+##**YY	800
		Epoxy	05,6S		4SOV40JQ##**YY	800
		MaxRok™	05,6S,57,72,12		4SMA40JB##**YY	800
		Phenolic	05,6S,57,12		4SPH40JB##**YY	800
		Phenolic Straight-Side	05,6S,57,12		4SPH40TB##**YY	1000
		High-Temp Phenolic	05,6S		4SHT40JQ##**YY	600
		Polyon MaxRok™	05,6S,57,12	G,K	4SMU40J+##**YY	700
		Poly-Pro™	05,6S,57,12	D,K,M,U,W	4SPP40J+##**YY	500
			72		4SPP40JM72**YY	500
		Polymadic™	05,6S,57,72,12	I,M	4SPM40J+##**YY	600
		DuraLastomer™	6S,57,12		4SSU40JL##**YY	750
		Super Elastomer	72		4SSX40JI72**YY	1000
		ErgoLastomer™	05,6S,57,S4,12		4SHU40JI##**YY	1000
		Ultraflex™	72		4SUX40JO72**YY	900
		MaxRok™	05,6S,57,12		4SMA40JT##**YY	800



4S Modular Kingpinless Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color	
					Replace ## with desired wheel bearing	
					SWIVEL	Load Cap.
					Part #	
5	2	Yoke Only			4SZZ50JZ83**YY	
		Neo-Energizer™	05,6S,57,S4,12		4SEN50JB##**YY	550
		Ergo Blue Rubber	05,6S,57,12		4SBR50JL##**YY	500
		Super-Soft	05,6S,57,12		4SSF50JH##**YY	150
		Nomadic™	05,6S,57,12	B,I	4SNM50J+##**YY	500
		Xtreme	S2		4SL4S0JAS2**YY	400
		Rubber on Nylon	05,6S,57,12		4SNR50JB##**YY	450
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	4STP50J+##**YY	350
		Polyolefin	05,6S,57,12	B,E	4SPO50J+##**YY	650
		Nylon	05,6S,57,12		4SNY50JE##**YY	900
		Ironman	05,6S,57,72,12	B,I	4SNX50JB##**YY	1250
		RokHard™	05,6S,57,12		4SHI50JB##**YY	900
		BrimStone™	05,6S	B,Q	4SGN50J+##**YY	1000
		Epoxy	05,6S		4SOV50JQ##**YY	1000
		MaxRok™	05,6S,57,72,12		4SMA50JB##**YY	1000
		Phenolic	05,6S,57,12		4SPH50JB##**YY	1000
		Phenolic Straight-Side			4SPH50TB##**YY	1200
		High-Temp Phenolic	05,6S		4SHT50JQ##**YY	750
		Sterollizer™	Bronze		4SSL50JCB2**YY	450
		Polyon MaxRok™	05,6S,57,12	G,K	4SMU50J+##**YY	1000
		Polyon-C	05,6S,57,12		4SPR50JL##**YY	900
		Poly-Pro™	05,6S,57,12	B,C,D,K,U,M,W	4SPP50J+##**YY	600
			72		4SPP50JM72*8YY	600
			72		4SPP50JP72**YY	700
			72		4SPP50JH72**YY	
		Polymadic™	05,6S,57,72,12	I,M	4SPM50J+##**YY	750
		DuraLastomer™	05,6S,57,12		4SSU50JL##**YY	800
		Super Elastomer	72		4SSX50JI72**YY	1000
		ErgoLastomer™	05,6S,57,S4,12		4SHU50JI##**YY	1250
		Ultraflex™	S4		4SUX50JOS4**YY	900

Only Superior Casters are Durable! 62



4S Modular Kingpinless Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color	
					Replace ## with desired wheel bearing	
					SWIVEL	Load Cap.
					Part #	
6	2	Yoke Only			4SZZ60JZ83**YY	
		Super-Soft	05,6S,57,12		4SSF60JI##**YY	150
		Neo-Energizer™	04,05,6S,S4		4SEN60JB##**YY	600
		Ergo Blue Rubber	04,05,6S		4SBR60JL##**YY	600
		Dura-Cushion™ Wheel	04,05,6S,72	X,Z	4SBC60J+##**YY	650
		Nomadic™	05,6S,57,12		4SNM60JB##**YY	600
		Xtreme	S2		4SLS60JAS2**YY	550
		Rubber on Nylon	05,6S,57,12		4SNR60JB##**YY	550
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	4STP60J+##**YY	500
		Polyolefin	05,6S,57,12	B,E	4SPO60J+##**YY	700
		Nylon	05,6S,57,12		4SNY60JE##**YY	1000
			72		4SNY60JE72**YY	1200
		Ironman	05,6S,57,72,12	B,I	4SNX60JB##**YY	1250
		RokHard™	05,6S,57,12		4SHI60JB##**YY	1000
		BrimStone™	05,6S	B,Q	4SGN60J+##**YY	1100
		Epoxy	05,6S		4SOV60JQ##**YY	1100
		MaxRok™	05,6S,57,72,12		4SMA60JB##**YY	1200
		Phenolic	05,6S,57,12		4SPH60JB##**YY	1200
		Phenolic Straight-Side			4SPH60TB##**YY	1250
		High-Temp Phenolic	05,6S		4SHT60JQ##**YY	900
		Poly MaxRok™	05,6S,57,12	G,K	4SMU60J+##**YY	1200
		Polyon-C	05,6S,57,12		4SPR60JL##**YY	1200
		Poly-Pro™	05,6S,57,72,12	D,I,K,M,W,U	4SPP60J+##**YY	720
			72		4SPP60JM72**YY	720
			72		4SPP60JP72**YY	800
			72		4SPP60JH72**YY	
		Polymadic™	05,6S,57,72,12	I,M	4SPM60J+##**YY	900
		DuraLastomer™	05,6S,57,12		4SSU60JL##**YY	900
		Super Elastomer	72		4SSX60JI72**YY	1100
		ErgoLastomer™	05,6S,57,S4,12		4SHU60JI##**YY	1250
		Ultraflex™	S4		4SUX60JOS4**YY	1000



4S Modular Kingpinless Stainless Steel Casters - 1250LB

Wheel Diameter	Tread Width	Wheel Type	Available Bearing Options (##)	Color (+)	Replace + with a desired wheel color	
					Replace ## with desired wheel bearing	
					SWIVEL	Load Cap.
					Part #	
8	2	Yoke Only			4SZZ80JZ83**YY	
		Super-Soft	05,6S,57,12		4SSF80JI##**YY	175
		Neo-Energizer™	05,6S,57,S4,12		4SEN80JB##**YY	600
		Ergo Blue Rubber	05,6S,57,72,12		4SBR80JL##**YY	700
		Dura-Cushion™ Wheel	05,6S,57,72,12		4SBC80J+##**YY	700
		Nomadic™	05,6S,57,12	B,I	4SNM80J+##**YY	700
		Xtreme	S2		4SLS80JAS2**YY	650
		Rubber on Nylon	05,6S,57,12		4SNR80JB##**YY	600
		Thermo-Pro™	05,6S,57,12	A,I,X,T,Y,Z	4STP80J+##**YY	600
		Polyolefin	05,6S,57,12	B,E	4SPO80J+##**YY	900
		Nylon	05,6S,57,12		4SNY80JE##**YY	1100
			72		4SNY80JE72**YY	1250
		Ironman	05,6S,57,72,12	B,I	4SNX80JB##**YY	1250
		RokHard™	05,6S,57,12		4SHI80JB##**YY	1100
		BrimStone™	05,6S	B,Q	4SGN80J+##**YY	1200
		Epoxy	05,6S		4SOV80JQ##**YY	1200
		MaxRok™	05,6S,57,72,12		4SMA80JB##**YY	1250
		Phenolic	05,6S,57,12		4SPH80JB##**YY	1250
		High-Temp Phenolic	05,6S		4SHT80JQ##**YY	1100
		Poly MaxRok™	05,6S,57,12	G,K	4SMU80J+##**YY	1250
		Poly-Pro™	05,6S,57,72,12	C,D,I,K,M,U,W	4SPP80J+##**YY	800
			72		4SPP80JM72**YY	800
			72		4SPP80JP72**YY	1000
			72		4SPP80JH72**YY	1000
		Polymadic™	05,6S,57,72,12	I,M	4SPM80J+##**YY	1000
		DuraLastomer™	05,6S,57,12		4SSU80JL##**YY	1000
		Super Elastomer	72		4SSX80JI72**YY	1200
		ErgoLastomer™	05,6S,57,S4,12		4SHU80JI##**YY	1250
		Ultraflex™	S4		4SUX80JOS4**YY	1200

Only Superior Casters are Durable! 64



Stainless Steel Floor Locks



- Easy to operate foot activated braking option for equipment and carts
- Enhance the stationary position of carts during loading and parking
- NSF and ROHS Compliant

Applications:

- Food processing (chicken / slaughter plants)
- Pharmaceutical, medical/hospital and laboratories
- Medical waste disposal
- Around water – boating environments, fisheries, cruise ship, etc...
- Some clean rooms
- Bakeries – the larger 'dough troughs'
- Autoclaves

Part #	Style	Correlated Caster Size	For use with Caster Series	Extended Height	Retracted Height
FL40S17	Pedal Lever	4	31/32/TS, B1/B2/B3, S5/S6	5-7/8	4-5/8
FL50S17		5		6-3/4	5-1/2
FL60S17		6		7-3/4	6-1/2
FL80S17		8		9-1/2	8-1/2

Disclaimer: Floor lock is not designed for direct support of weight



S57/S58 SS Kingpinless Heavy Duty Caster - Challenger™



- Constructed with a 3/8" thick top plate from 304 SS and welded to 304 SS raceway
- Integrated 3" diameter, precisely machined single raceway and 1/2" stainless ball bearings
- Grease fitting on raceway and axle
- 3/8" thick 304 stainless steel legs double welded both inside and outside
- NSF and ROHS Compliant
- Electrolytic polishing to a shining finish
- Stainless 3/4" axle

Applications:

- Marine environment, fisheries, etc...
- Heavy duty stainless machinery
- Autoclaves
- Chemical environment

Fastening Pattern			
Plate Code	Overall Size	Bolt Hole Pattern	Mounting Bolt size
19	4-1/2 x 6-1/4	2-7/16 x 4-15/16 slotted to 3-3/8 x 5-1/4	1/2

Wheel Diameter	Overall Height	Swivel Radius
6	7-1/2	5-1/2
8	10-1/8	6-5/16
10	11-1/2	7-1/2

Only Superior Casters are Durable! 66



S57/S58 SS Kingpinless Heavy Duty Caster - Challenger™

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Bearing Type	Swivel Caster Part No.	Rigid Caster Part No.
6	YOKE ONLY				S57ZZ60LZ8819YY	S58ZZ60LZ8819YY
	2x1.5	Dual-Wheel	3000	SS Prec. B	S57DW60LBS619YY	S58DW60LBS619YY
			3000	SS Prec. B	S57DW60LGS619YY	S58DW60LGS619YY
			3000	SS Prec. B	S57DW60CBS619YY	S58DW60CBS619YY
		Super-Ergo™	1300	SS Prec. B	S57DU60LRS519YY	S58DU60LRS519YY
	3	Ergolastomer™	2500	41, S5	S57HU60LI##19YY	S58HU60LI##19YY
		Elastomer™	2000	S5	S57SX60LIS519YY	S58SX60LIS519YY
		Ironman™	3000	SS Prec. B	S57NX60LBS519YY	S58NX60LBS519YY
		Ironman™ V-groove	3000	SS Prec. B	S57NV60LTS519YY	S58NV60LTS519YY
			3000	SS Prec. B	S57NV60LWS519YY	S58NV60LWS519YY
8	YOKE ONLY				S57ZZ80LZ8819YY	S58ZZ80LZ8819YY
	2x1.5	Dual-Wheel	3000	SS Prec. B	S57DW80LBS619YY	S58DW80LBS619YY
			3000	SS Prec. B	S57DW80LGS619YY	S58DW80LGS619YY
			3000	SS Prec. B	S57DW80LRS619YY	S58DW80LRS619YY
			3000	SS Prec. B	S57DW80CBS619YY	S58DW80CBS619YY
	3	Poly-Pro™	1150	41, B8,58	S57PP80LM##19YY	S58PP80LM##19YY
		Super™	450	SS Prec. B	S57SP80LI3S19YY	S58SP80LI3S19YY
		Ergolastomer™	3000	41, S5,B8	S57HU80LI##19YY	S58HU80LI##19YY
		Elastomer™	2200	SS Prec. B	S57SX80LIS519YY	S58SX80LIS519YY
		Maxrok™	1600	41, B8, S5	S57MA80LB##19YY	S58MA80LB##19YY
		Brimstone™	2000	SS Roller B	S57GN80LQ4119YY	S58GN80LQ4119YY
		Ironman™	3000	SS Prec. B	S57NX80LBS519YY	S58NX80LBS519YY
		Ironman™ V-groove	3000	SS Prec. B	S57NV80LTS519YY	S58NV80LTS519YY
			3000	SS Prec. B	S57NV80LWS519YY	S58NV80LWS519YY
	Epoxy	1900	41, B8	S57OV80LQ##19YY	S58OV80LQ##19YY	
10	YOKE ONLY				S57ZZ10LZ8819YY	S58ZZ10LZ8819YY
	2x1.5	Dual-Wheel	3000	SS Prec. B	S57DW10LBS619YY	S58DW10LBS619YY
			3000	SS Prec. B	S57DW10LGS619YY	S58DW10LGS619YY
			3000	SS Prec. B	S57DW10CBS619YY	S58DW10CBS619YY
	3	Poly-Pro™	1250	41, B8,58	S57PP10LM##19YY	S58PP10LM##19YY
		Super™	500	SS Prec. B	S57SP10LI3S19YY	S58SP10LI3S19YY
		Ergolastomer™	3000	41, S5, B8	S57HU10LI##19YY	S58HU10LI##19YY
		Maxrok™	2000	41, S5, B8	S57MA10LB##19YY	S58MA10LB##19YY
		Ironman™	3000	SS Prec. B	S57NX10LBS519YY	S58NX10LBS519YY
		Ironman™ V-groove	3000	SS Prec. B	S57NV10LWS519YY	S58NV10LWS519YY
Epoxy			2400	41, B8	S57OV10LQ##19YY	S58OV10LQ##19YY



S61/S62 SS Kingpinless Heavy Duty Caster - Challenger™



- Constructed with a 3/8" top plate from 304 SS and welded to 304 SS raceway
- Integrated 3" diameter, precisely machined single raceway and 1/2" stainless ball bearings
- Grease fitting on raceway and axle
- 3/8" thick 304 stainless steel legs double welded both inside and outside
- Electrolytic polishing to a shining finish
- NSF and ROHS Compliant
- Stainless 3/4" axle

Applications:

- Marine Environment, fisheries, etc...
- Heavy duty stainless machinery
- Autoclaves
- Chemical environment

Fastening Pattern			
Plate Code	Overall Size	Bolt Hole Pattern	Mounting Bolt Size
25	5-1/4 x 7-1/4	3-3/8 x 5-1/4 slotted to 4-1/8 x 6-1/8	1/2

Wheel Diameter	Overall Height	Swivel Radius
6	8	4-3/4
8	10-1/2	6-1/2
10	12-1/2	8-1/32

Only Superior Casters are Durable! 68



S61/S62 SS Kingpinless Heavy Duty Caster - Challenger™

Wheel Diameter	Tread Width	Wheel Type	Load Capacity	Bearing Type	Swivel Caster Part No.	Rigid Caster Part No.
6	YOKE ONLY				S61ZZ60LZ8825YY	S62ZZ60LZ8825YY
	2x1.5	Dual-Wheel	3000	SS Prec. B	S61DW60LBS625YY	S62DW60LBS625YY
			3000	SS Prec. B	S61DW60LGS625YY	S62DW60LGS625YY
			3000	SS Prec. B	S61DW60CBS625YY	S62DW60CBS625YY
		Super-Ergo™	1300	SS Prec. B	S61DU60LRS525YY	S62DU60LRS525YY
	3	Ergolastomer™	2500	41, S5	S61HU60LI##25YY	S62HU60LI##25YY
		Elastomer™	2000	S5	S61SX60LIS525YY	S62SX60LIS525YY
		Ironman™	3000	SS Prec. B	S61NX60LBS525YY	S62NX60LBS525YY
		Ironman™ V-groove	3000	SS Prec. B	S61NV60LTS525YY	S62NV60LTS525YY
			3000	SS Prec. B	S61NV60LWS525YY	S62NV60LWS525YY
8	YOKE ONLY				S61ZZ80LZ8825YY	S62ZZ80LZ8825YY
	2X1.5	Dual-Wheel	3000	SS Prec. B	S61DW80LBS625YY	S62DW80LBS625YY
			3000	SS Prec. B	S61DW80LGS625YY	S62DW80LGS625YY
			3000	SS Prec. B	S61DW80LRS625YY	S62DW80LRS625YY
			3000	SS Prec. B	S61DW80CBS625YY	S62DW80CBS625YY
	3	Poly-Pro™	1150	41, B8,58	S61PP80LM##25YY	S62PP80LM##25YY
		Super™	450	SS Prec. B	S61SP80LI3S25YY	S62SP80LI3S25YY
		Ergolastomer™	3000	41, S5,B8	S61HU80LI##25YY	S62HU80LI##25YY
		Elastomer™	2200	SS Prec. B	S61SX80LIS525YY	S62SX80LIS525YY
		Maxrok™	1600	41, B8, S5	S61MA80LB##25YY	S62MA80LB##25YY
		Brimstone™	2000	SS Roller B	S61GN80LQ4125YY	S62GN80LQ4125YY
		Ironman™	3000	SS Prec. B	S61NX80LBS525YY	S62NX80LBS525YY
		Ironman™ V-groove	3000	SS Prec. B	S61NV80LTS525YY	S62NV80LTS525YY
			3000	SS Prec. B	S61NV80LWS525YY	S62NV80LWS525YY
	Expoxy	1900	41, B8	S61OV80LQ##25YY	S62OV80LQ##25YY	
10	YOKE ONLY				S61ZZ10LZ8825YY	S62ZZ10LZ8825YY
	2x1.5	Dual-Wheel	3000	SS Prec. B	S61DW10LBS625YY	S62DW10LBS625YY
			3000	SS Prec. B	S61DW10LGS625YY	S62DW10LGS625YY
			3000	SS Prec. B	S61DW10CBS625YY	S62DW10CBS625YY
	3	Poly-Pro™	1250	41, B8,58	S61PP10LM##25YY	S62PP10LM##25YY
		Super™	500	SS Prec. B	S61SP10LI3S25YY	S62SP10LI3S25YY
		Ergolastomer™	3000	41, S5, B8	S61HU10LI##25YY	S62HU10LI##25YY
		Maxrok™	2000	41, S5, B8	S61MA10LB##25YY	S62MA10LB##25YY
		Ironman™	3000	SS Prec. B	S61NX10LBS525YY	S62NX10LBS525YY
		Ironman™ V-groove	3000	SS Prec. B	S61NV10LWS525YY	S62NV10LWS525YY
Expoxy	2400	41, B8	S61OV10LQ##25YY	S62OV10LQ##25YY		



Stainless LVS-LEVELING SERIES

- Internal leveling mechanism
- Die casted body made from stainless grade S304, w/ swivel head from S316L stainless steel, with S304 axle
- Electrolytic shining finish
- Dial with rubber pad
- Ultra strong and non-marking nylon wheel




Wheel Diameter	Tread Width	Part No.	Load Capacity	Overall Height	Adjustment Range	Fastening Specification	Attaching Bolt Size
2	0.88	LVS300V4	600	3.23"	+.47	Plate 2.87 SQ. Hole Space 2.28 SQ	1/4"
2	0.88	LVS300V5	600	3.23"	+.47	Threaded Hollow Kingpin M12	12mm
2.44	1.13	LVS600V3	1300	4.02"	+.59	Plated 3.54 SQ, Hole Space 2.77SQ	5/16"
2.44	1.13	LVS600V4	1300	4.02"	+.59	Threaded Hollow Kingpin M12	12mm

Only Superior Casters are Durable! 70



CONDUCTIVE WHEELS

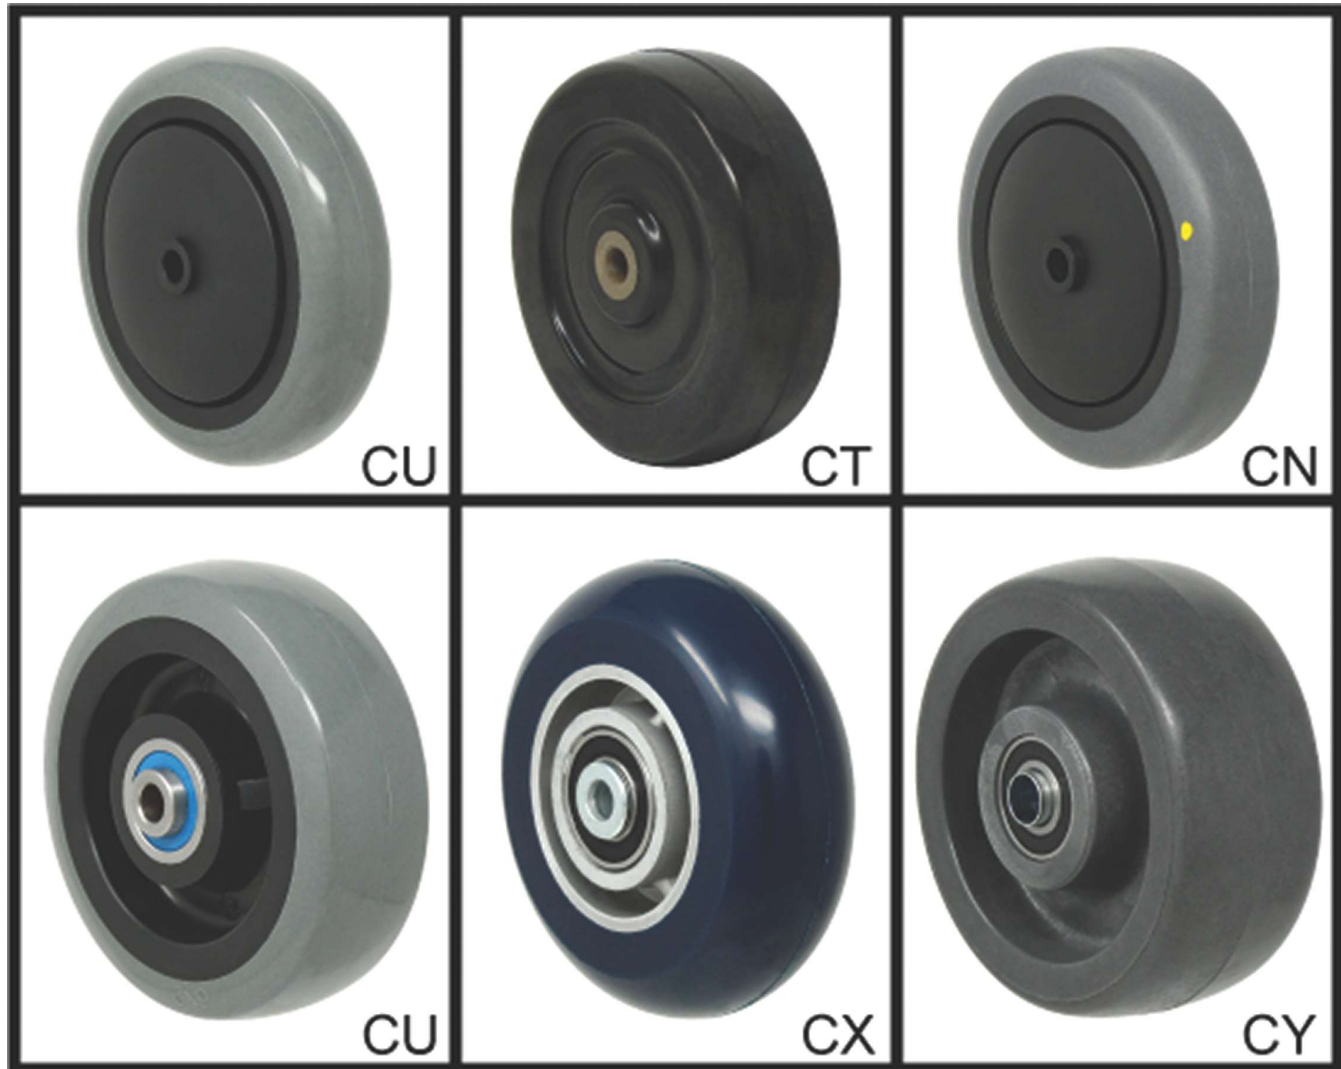

Variety of wheels available for different applications.

CN Thermo rubber wheel

- Shore A 80 +/- 5
- Surface Resistance $> 1 \times 10^3$ but $< 1 \times 10^5$ ohms/square

CU Polyurethane tread interlocked onto a polyolefin core

- Shore A 95 +/- 5
- Surface Resistance $> 1 \times 10^3$ but $< 1 \times 10^5$ ohms/square

CT Solid hard rubber core with cushion rubber tread surface

- Shore A 85 +/- 5
- Surface Resistance $> 1 \times 10^3$ but $< 1 \times 10^5$ ohms/square

CY Nylon wheel

- Shore D 85 for its maximum capacity
- Surface Resistance $> 1 \times 10^3$ but $< 1 \times 10^5$ ohms/square

CX Casted cushion Polyurethane

- Shore A 80 +/- 5
- Surface Resistance $> 1 \times 10^6$ but $< 1 \times 10^9$ ohms/square



CONDUCTIVE WHEELS

Wheel Dia.	Tread Width	Wheel Type	Load Capacity	Bearing Type ##	Caster Part Number			Available Fastening Patterns & Caster Options
					Total Lock	SWIVEL	RIGID	
3"	1-1/4"	CN-Conductive	225	^Precision		15CN30GH44**YY	16CN30GH44**YY	ref Page 15
				SS Precision		15CN30GH4S**YY	16CN30GH4S**YY	ref Page 15
3"	1-1/4"	CN-Conductive	225	^Precision	S7CN30GH44**YY	S9CN30GH44**YY	S8CN30GH44**YY	ref Page 22
				SS Precision	S7CN30GH4S**YY	S9CN30GH4S**YY	S8CN30GH4S**YY	ref Page 22
3"	1-1/4"	CN-Conductive	225	^Precision	7TCN30GH44**YY	73CN30GH44**YY	74CN30GH44**YY	ref Page 28
				SS Precision	7TCN30GH4S**YY	73CN30GH4S**YY	74CN30GH4S**YY	ref Page 28
3"	1-1/4"	CN-Conductive	225	SS BALL	RTCN30GH2S**YY	RZCN30GH2S**YY	RBCN30GH2S**YY	ref Page 33
4"	1-1/4"	CN-Conductive	250	^Precision		15CN40GH44**YY	16CN40GH44**YY	ref Page 15
				SS Precision		15CN40GH4S**YY	16CN40GH4S**YY	ref Page 15
4"	1-1/4"	CN-Conductive	250	^Precision	S7CN40GH44**YY	S9CN40GH44**YY	S8CN40GH44**YY	ref Page 22
				SS Precision	S7CN40GH4S**YY	S9CN40GH4S**YY	S8CN40GH4S**YY	ref Page 22
4"	1-1/4"	CN-Conductive	250	^Precision	7TCN40GH44**YY	73CN40GH44**YY	74CN40GH44**YY	ref Page 28
				SS Precision	7TCN40GH4S**YY	73CN40GH4S**YY	74CN40GH4S**YY	ref Page 28
4"	1-1/4"	CN-Conductive	250	SS BALL	RTCN40GH2S**YY	RZCN40GH2S**YY	RBCN40GH2S**YY	ref Page 40
5"	1-1/4"	CN-Conductive	250	S4, 5A		15CN50GH44**YY	16CN50GH44**YY	ref Page 15
						15CN50GH4S**YY	16CN50GH4S**YY	ref Page 15
5"	1-1/4"	CN-Conductive	250	S4, 5A	S7CN50GH44**YY	S9CN50GH44**YY	S8CN50GH44**YY	ref Page 22
					S7CN50GH4S**YY	S9CN50GH4S**YY	S8CN50GH4S**YY	ref Page 22
5"	1-1/4"	CN-Conductive	250	S4, 5A	7TCN50GH44**YY	73CN50GH44**YY	74CN50GH44**YY	ref Page 28
					7TCN50GH4S**YY	73CN50GH4S**YY	74CN50GH4S**YY	ref Page 28
5"	1-1/4"	CN-Conductive	250	S4, 5A	RTCN50GH2S**YY	RZCN50GH2S**YY	RBCN50GH2S**YY	ref Page 40
4	2"	CN-Conductive	300	4G,05, S6,B5,B1	B3CN40JH##17YY	B1CN40JH##17YY	B2CN40JH##17YY	ref Page 44
4	2"	CN-Conductive	300	4G,05, S6,B5,B1	TSCN40JH##17YY	31CN40JH##17YY	32CN40JH##17YY	ref Page 50
4	2"	CN-Conductive	300	4G,05, S6,B5,B1		S5CN40JH##17YY	S6CN40JH##17YY	ref Page 55
4	2"	CN-Conductive	300	4G,05, S6,B5,B1		4SCN40JH#317YY		ref Page 60
5"	2"	CN-Conductive	325	4G,05, S6,B5,B1	B3CN50JH##17YY	B1CN50JH##17YY	B2CN50JH##17YY	ref Page 44
5"	2"	CN-Conductive	325	4G,05, S6,B5,B1	TSCN50JH##17YY	31CN50JH##17YY	32CN50JH##17YY	ref Page 50
5"	2"	CN-Conductive	325	4G,05, S6,B5,B1		S5CN50JH##17YY	S6CN50JH##17YY	ref Page 55
5"	2"	CN-Conductive	325	4G,05, S6,B5,B1		4SCN50JH#317YY		ref Page 60
6"	2"	CN-Conductive	410	4G,05, S6,B5,B1	B3CN60JH##17YY	B1CN60JH##17YY	B2CN60JH##17YY	ref Page 44
6"	2"	CN-Conductive	410	4G,05, S6,B5,B1	TSCN60JH##17YY	31CN60JH##17YY	32CN60JH##17YY	ref Page 50
6"	2"	CN-Conductive	410	4G,05, S6,B5,B1		S5CN60JH##17YY	S6CN60JH##17YY	ref Page 55
6"	2"	CN-Conductive	410	4G,05, S6,B5,B1		4SCN60JH#317YY		ref Page 60
8"	2"	CN-Conductive	500	4G,05, S6,B5,B1	B3CN80JH##17YY	B1CN80JH##17YY	B2CN80JH##17YY	ref Page 44
8"	2"	CN-Conductive	500	4G,05, S6,B5,B1	TSCN80JH##17YY	31CN80JH##17YY	32CN80JH##17YY	ref Page 50
8"	2"	CN-Conductive	500	4G,05, S6,B5,B1		S5CN80JH##17YY	S6CN80JH##17YY	ref Page 55
8"	2"	CN-Conductive	500	4G,05, S6,B5,B1		4SCN80JH#317YY		ref Page 60

Only Superior Casters are Durable! 72



CONDUCTIVE WHEELS

Wheel Dia.	Tread Width	Wheel Type	Load Capacity	Bearing Type ##	Caster Part Number			Available Fastening Patterns & Caster Options
					Total Lock	SWIVEL	RIGID	
3"	1-1/4"	CU-Conductive	225	^Precision		15CU30GH44**YY	16CU30GH44**YY	ref Page 15
				SS Precision		15CU30GH4S**YY	16CU30GH4S**YY	ref Page 15
3"	1-1/4"	CU-Conductive	225	^Precision	S7CU30GH44**YY	S9CU30GH44**YY	S8CU30GH44**YY	ref Page 22
				SS Precision	S7CU30GH4S**YY	S9CU30GH4S**YY	S8CU30GH4S**YY	ref Page 22
3"	1-1/4"	CU-Conductive	225	^Precision	7TCU30GH44**YY	73CU30GH44**YY	74CU30GH44**YY	ref Page 28
				SS Precision	7TCU30GH4S**YY	73CU30GH4S**YY	74CU30GH4S**YY	ref Page 28
3"	1-1/4"	CU-Conductive	225	SS BALL	RTCU30GH2S**YY	RZCU30GH2S**YY	RBCU30GH2S**YY	ref Page 40
4"	1-1/4"	CU-Conductive	250	^Precision		15CU40GH44**YY	16CU40GH44**YY	ref Page 15
				SS Precision		15CU40GH4S**YY	16CU40GH4S**YY	ref Page 15
4"	1-1/4"	CU-Conductive	250	^Precision	S7CU40GH44**YY	S9CU40GH44**YY	S8CU40GH44**YY	ref Page 22
				SS Precision	S7CU40GH4S**YY	S9CU40GH4S**YY	S8CU40GH4S**YY	ref Page 22
4"	1-1/4"	CU-Conductive	250	^Precision	7TCU40GH44**YY	73CU40GH44**YY	74CU40GH44**YY	ref Page 28
				SS Precision	7TCU40GH4S**YY	73CU40GH4S**YY	74CU40GH4S**YY	ref Page 28
4"	1-1/4"	CU-Conductive	250	SS BALL	RTCU40GH2S**YY	RZCU40GH2S**YY	RBCU40GH2S**YY	ref Page 40
5"	1-1/4"	CU-Conductive	250	S4, 5A		15CU50GH44**YY	16CU50GH44**YY	ref Page 15
						15CU50GH4S**YY	16CU50GH4S**YY	ref Page 15
5"	1-1/4"	CU-Conductive	250	S4, 5A	S7CU50GH44**YY	S9CU50GH44**YY	S8CU50GH44**YY	ref Page 22
					S7CU50GH4S**YY	S9CU50GH4S**YY	S8CU50GH4S**YY	ref Page 22
5"	1-1/4"	CU-Conductive	250	S4, 5A	7TCU50GH44**YY	73CU50GH44**YY	74CU50GH44**YY	ref Page 28
					7TCU50GH4S**YY	73CU50GH4S**YY	74CU50GH4S**YY	ref Page 28
5"	1-1/4"	CU-Conductive	250	S4, 5A	RTCU50GH2S**YY	RZCU50GH2S**YY	RBCU50GH2S**YY	ref Page 40
4	2"	CU-Conductive	300	4G,05, S6,B5,B1	B3CU40JH##17YY	B1CU40JH##17YY	B2CU40JH##17YY	ref Page 44
4	2"	CU-Conductive	300	4G,05, S6,B5,B1	TSCU40JH##17YY	31CU40JH##17YY	32CU40JH##17YY	ref Page 50
4	2"	CU-Conductive	300	4G,05, S6,B5,B1		S5CU40JH##17YY	S6CU40JH##17YY	ref Page 55
4	2"	CU-Conductive	300	4G,05, S6,B5,B1		4SCU40JH#317YY		ref Page 60
5"	2"	CU-Conductive	325	4G,05, S6,B5,B1	B3CU50JH##17YY	B1CU50JH##17YY	B2CU50JH##17YY	ref Page 44
5"	2"	CU-Conductive	325	4G,05, S6,B5,B1	TSCU50JH##17YY	31CU50JH##17YY	32CU50JH##17YY	ref Page 50
5"	2"	CU-Conductive	325	4G,05, S6,B5,B1		S5CU50JH##17YY	S6CU50JH##17YY	ref Page 55
5"	2"	CU-Conductive	325	4G,05, S6,B5,B1		4SCU50JH#317YY		ref Page 60
6"	2"	CU-Conductive	410	4G,05, S6,B5,B1	B3CU60JH##17YY	B1CU60JH##17YY	B2CU60JH##17YY	ref Page 44
6"	2"	CU-Conductive	410	4G,05, S6,B5,B1	TSCU60JH##17YY	31CU60JH##17YY	32CU60JH##17YY	ref Page 50
6"	2"	CU-Conductive	410	4G,05, S6,B5,B1		4SCU60JH#317YY		ref Page 60
8"	2"	CU-Conductive	500	4G,05, S6,B5,B1	B3CU80JH##17YY	B1CU80JH##17YY	B2CU80JH##17YY	ref Page 44
8"	2"	CU-Conductive	500	4G,05, S6,B5,B1	TSCU80JH##17YY	31CU80JH##17YY	32CU80JH##17YY	ref Page 50
8"	2"	CU-Conductive	500	4G,05, S6,B5,B1		S5CU80JH##17YY	S6CU80JH##17YY	ref Page 55
8"	2"	CU-Conductive	500	4G,05, S6,B5,B1		4SCU80JH#317YY		ref Page 60

CONDUCTIVE WHEELS

73 Only Superior Casters are Durable!



Wheel Dia.	Tread Width	Wheel Type	Load Capacity	Bearing Type ##	Caster Part Number			Available Fastening Patterns & Caster Options
					Total Lock	SWIVEL	RIGID	
3"	1-1/4"	CT-Conductive	225	^Precision		15CT30GH44**YY	16CT30GH44**YY	ref Page 15
				SS Precision		15CT30GH4S**YY	16CT30GH4S**YY	ref Page 15
3"	1-1/4"	CT-Conductive	225	^Precision	S7CT30GH44**YY	S9CT30GH44**YY	S8CT30GH44**YY	ref Page 22
				SS Precision	S7CT30GH4S**YY	S9CT30GH4S**YY	S8CT30GH4S**YY	ref Page 22
3"	1-1/4"	CT-Conductive	225	^Precision	7TCT30GH44**YY	73CT30GH44**YY	74CT30GH44**YY	ref Page 28
				SS Precision	7TCT30GH4S**YY	73CT30GH4S**YY	74CT30GH4S**YY	ref Page 28
3"	1-1/4"	CT-Conductive	225	SS BALL	RTCT30GH2S**YY	RZCT30GH2S**YY	RBCT30GH2S**YY	ref Page 40
4"	1-1/4"	CT-Conductive	250	^Precision		15CT40GH44**YY	16CT40GH44**YY	ref Page 15
				SS Precision		15CT40GH4S**YY	16CT40GH4S**YY	ref Page 15
4"	1-1/4"	CT-Conductive	250	^Precision	S7CT40GH44**YY	S9CT40GH44**YY	S8CT40GH44**YY	ref Page 22
				SS Precision	S7CT40GH4S**YY	S9CT40GH4S**YY	S8CT40GH4S**YY	ref Page 22
4"	1-1/4"	CT-Conductive	250	^Precision	7TCT40GH44**YY	73CT40GH44**YY	74CT40GH44**YY	ref Page 28
				SS Precision	7TCT40GH4S**YY	73CT40GH4S**YY	74CT40GH4S**YY	ref Page 28
4"	1-1/4"	CT-Conductive	250	SS BALL	RTCT40GH2S**YY	RZCT40GH2S**YY	RBCT40GH2S**YY	ref Page 40
5"	1-1/4"	CT-Conductive	250	S4, 5A		15CT50GH44**YY	16CT50GH44**YY	ref Page 15
						15CT50GH4S**YY	16CT50GH4S**YY	ref Page 15
5"	1-1/4"	CT-Conductive	250	S4, 5A	S7CT50GH44**YY	S9CT50GH44**YY	S8CT50GH44**YY	ref Page 22
					S7CT50GH4S**YY	S9CT50GH4S**YY	S8CT50GH4S**YY	ref Page 22
5"	1-1/4"	CT-Conductive	250	S4, 5A	7TCT50GH44**YY	73CT50GH44**YY	74CT50GH44**YY	ref Page 28
					7TCT50GH4S**YY	73CT50GH4S**YY	74CT50GH4S**YY	ref Page 28
5"	1-1/4"	CT-Conductive	250	S4, 5A	RTCT50GH2S**YY	RZCT50GH2S**YY	RBCT50GH2S**YY	ref Page 40
4	2"	CX-Conductive	600	72	B3CX40JL7217YY	B1CX40JL7217YY	B2CX40JL7217YY	ref Page 44
4	2"	CX-Conductive	600	72	TSCX40JL7217YY	31CX40JL7217YY	32CX40JL7217YY	ref Page 50
4	2"	CX-Conductive	600	72		S5CX40JL7217YY	S6CX40JL7217YY	ref Page 55
4	2"	CX-Conductive	600	72		4SCX40JL7217YY		ref Page 60
5"	2"	CX-Conductive	700	72	B3CX50JL7217YY	B1CX50JL7217YY	B2CX50JL7217YY	ref Page 44
5"	2"	CX-Conductive	700	72	TSCX50JL7217YY	31CX50JL7217YY	32CX50JL7217YY	ref Page 50
5"	2"	CX-Conductive	700	72		S5CX50JL7217YY	S6CX50JL7217YY	ref Page 55
5"	2"	CX-Conductive	700	72		4SCX50JL7217YY		ref Page 60
6"	2"	CX-Conductive	800	72	B3CX60JL7217YY	B1CX60JL7217YY	B2CX60JL7217YY	ref Page 44
6"	2"	CX-Conductive	800	72	TSCX60JL7217YY	31CX60JL7217YY	32CX60JL7217YY	ref Page 50
6"	2"	CX-Conductive	800	72		S5CX60JL7217YY	S6CX60JL7217YY	ref Page 55
6"	2"	CX-Conductive	800	72		4SCX60JL7217YY		ref Page 60
8"	2"	CX-Conductive	900	72	B3CX80JL7217YY	B1CX80JL7217YY	B2CX80JL7217YY	ref Page 44
8"	2"	CX-Conductive	900	72	TSCX80JL7217YY	31CX80JL7217YY	32CX80JL7217YY	ref Page 50
8"	2"	CX-Conductive	900	72		S5CX80JL7217YY	S6CX80JL7217YY	ref Page 55
8"	2"	CX-Conductive	900	72		4SCX80JL7217YY		ref Page 60

CONDUCTIVE WHEELS

Only Superior Casters are Durable! 74



Wheel Dia.	Tread Width	Wheel Type	Load Capacity	Bearing Type ##	Caster Part Number			Available Fastening Patterns & Caster Options
					Total Lock	SWIVEL	RIGID	
5"	1-1/4"	CY-Conductive	250	S4, 5A	S7CY50GH44**YY	S9CY50GH44**YY	S8CY50GH44**YY	ref Page 22
					S7CY50GH4S**YY	S9CY50GH4S**YY	S8CY50GH4S**YY	ref Page 22
5"	1-1/4"	CY-Conductive	250	S4, 5A	7TCY50GH44**YY	73CY50GH44**YY	74CY50GH44**YY	ref Page 28
					7TCY50GH4S**YY	73CY50GH4S**YY	74CY50GH4S**YY	ref Page 28
5"	1-1/4"	CY-Conductive	250	S4, 5A	RTCY50GH2S**YY	RZCY50GH2S**YY	RBCY50GH2S**YY	ref Page 40
4"	2"	CY-Conductive	300	05, S6,B5,B1	B3CY40JH##17YY	B1CY40JH##17YY	B2CY40JH##17YY	ref Page 44
4"	2"	CY-Conductive	300	05, S6,B5,B1	TSCY40JH##17YY	31CY40JH##17YY	32CY40JH##17YY	ref Page 50
4"	2"	CY-Conductive	300	05, S6,B5,B1		S5CY40JH##17YY	S6CY40JH##17YY	ref Page 55
4"	2"	CY-Conductive	300	05, S6,B5,B1		4SCY40JH#317YY		ref Page 60
5"	2"	CY-Conductive	325	05, S6,B5,B1	B3CY50JH##17YY	B1CY50JH##17YY	B2CY50JH##17YY	ref Page 44
5"	2"	CY-Conductive	325	05, S6,B5,B1	TSCY50JH##17YY	31CY50JH##17YY	32CY50JH##17YY	ref Page 50
5"	2"	CY-Conductive	325	05, S6,B5,B1		S5CY50JH##17YY	S6CY50JH##17YY	ref Page 55
5"	2"	CY-Conductive	325	05, S6,B5,B1		4SCY50JH#317YY		ref Page 60
6"	2"	CY-Conductive	410	05, S6,B5,B1	B3CY60JH##17YY	B1CY60JH##17YY	B2CY60JH##17YY	ref Page 44
6"	2"	CY-Conductive	410	05, S6,B5,B1	TSCY60JH##17YY	31CY60JH##17YY	32CY60JH##17YY	ref Page 50
6"	2"	CY-Conductive	410	05, S6,B5,B1		S5CY60JH##17YY	S6CY60JH##17YY	ref Page 55
6"	2"	CY-Conductive	410	05, S6,B5,B1		4SCY60JH#317YY		ref Page 60
8"	2"	CY-Conductive	500	05, S6,B5,B1	B3CY80JH##17YY	B1CY80JH##17YY	B2CY80JH##17YY	ref Page 44
8"	2"	CY-Conductive	500	05, S6,B5,B1	TSCY80JH##17YY	31CY80JH##17YY	32CY80JH##17YY	ref Page 50
8"	2"	CY-Conductive	500	05, S6,B5,B1		S5CY80JH##17YY	S6CY80JH##17YY	ref Page 55
8"	2"	CY-Conductive	500	05, S6,B5,B1		4SCY80JH#317YY		ref Page 60

Notes



HARDWARE

STAINLESS BRAKES								
TOP LOCK			FACE CONTACT			UNIVERSAL FACE CONTACT		
								
Top Lock Brake			Face contact Brake			Universal Face Contact Brake		
Part #	Wheel Dia.	Series	Part #	Wheel Dia.	Series	Part #	Wheel Dia.	Series
STB30GA	3	S9, 15, 73	FCBS5760	6	S57, S61	UNISF40JA	4	31,32,B1,B2
STB35GA	3.5	S9, 15	FCBS5780	8	S57, S61	UNISF50JA	5	31,32,B1,B2
STB-35GA-73	3.5	73	FCBS5710	10	S57, S61	UNISF60JA	6	31,32,B1,B2
STB40GA	4	S9, 15, 73				UNISF80JA	8	31,32,B1,B2
STB50GA	5	S9, 15, 73				TKB30GA	3	S9,15
STB40JA	4	31, S5				TKB35GA	3.5	S9,15,73
STB50JA	5	31, S5				TKB40GA	4	S9,15,73
STB60JA	6	31, S5				TKB50GA	5	S9,15,73
STB80JA	8	31, S5						
4-POSITION LOCKS								
								
Part #	Series	Part #	Series	Part #	Series			
4PSSWE	S5, 31,S57,S61	4PSL31	S5,31,B1	4PFLB1	S5,31,B1			



THREAD GUARDS



Part #	Outside Dia.	For
TGSS068	68MM	SX40JI72
TGSS090	90MM	SX50JI72
TGSS115	115MM	SX60JI72
TGSS153	153MM	SX80JI72

RUBBER STEM ADAPTORS



Use in Round Tubing I. D.	Expandable Range	Part #	Stem designation when attached to a caster
7/8	.852 - .927	ASP7278	A2
1	.928 - 1.029	ASP7310	A3
1-1/2	1.426 - 1.589	ASP7615	A6
3/4	.720 - .851	ADP7134	71
7/8	.852 - .919	ADP7278	72
15/16	0.920 - .980	ADP7S24	7B
1	.935 - 1.029	ADP7310	73
1-1/16	1.020 - 1.100	ADP7A16	7A
1-1/8	1.030 - 1.140	ADP7418	74
1-3/16	1.178 - 1.303	ADP7814	78
1-3/8	1.360 - 1.425	ADP7538	75
1-1/2	1.426 - 1.589	ADP7615	76
1-7/8	1.790 - 1.850	ADP7717	77

BALL BEARINGS



Part #	Bearing I. D.	Wheel Bore	Wheel Hub Length
PRBRG2S	3/8	1-1/8	1-1/2
PRBRG6S	1/2	1-3/16	2-3/16
PRBRG9S	3/4	1-15/16	3-1/4

77 Only Superior Casters are Durable!

ROLLER BEARINGS

	Part #	Bearing I. D.	Wheel Bore	Bearing Length	Wheel Hub Length
	SRBSS05	3/4	1-3/16	1.875	2-3/16
	SRBSS41	1	1-15/16	3	3-1/4

SPANNER BUSHINGS

	Part #	I. D.	O. D.	Length
	SPSSKUL	3/8	1/2	1-9/16
	SPSSBBL	3/8	1/2	1-5/8
	SPSSBBB	3/8	1/2	1-11/16
	SPSSBBC	3/8	20MM	40MM
	SPSSIRB	1/2	3/4	1-3/4
	SPSSIRJ	1/2	3/4	2-7/16
	SPSSIXJ	17MM	1/2	2-7/16
	SPSSEJK	3/4	1	3

AXLES

	Plain Axle Part #	Zerk Axle Part #	Shoulder Axle Part #	Axle O.D.	Axle Length
	APTA218	AZTA212		3/8	2-1/8
	APTA224	AZTA224		3/8	2-1/4
		AZTA232		3/8	2-5/16
	APTA225	AZTA238		3/8	2-1/2
		AZTA225		3/8	2-1/2
	APT312	AZTB312	AZTS312	1/2	3-1/2
	APTC500			3/4	5



WASHERS



Part #	Washer I. D.	Washer O. D.
STLTRT11	3/4	1-3/16
STLTW20	3/4	1-5/8
FLTRS13	1	1-15/16
FLTRS21	1	2-3/8

PLASTIC SOCKETS



Part #	I. D.	O. D.	Guage	Mouting hole Depth (in)	Stem #	For use in Tubing I. D.
RSK58	0.571	0.688	17	1.25	90, 91, 97	ROUND
RSK34	0.625	0.75	16	1.93	90, 91, 97	ROUND
RSK78	0.777	0.875	18	1.93	90, 91, 97	ROUND
RSK10	0.872	1.062	13	2.125	90, 91, 97	ROUND
SSK34	0.625	3/4X3/4	16	1.93	90, 91, 97	SQUARE
SSK78	0.765	7/8X7/8	16	1.93	90, 91, 97	SQUARE
SSK95	1.87	2X2	16	2.62	95	SQUARE
RSS54	0.571	0.687	17	1.37	90, 91, 97	ROUND

Notes

DURABLE U.S.A. INC.
Corporate Office: 2801 E. Abrams St., Arlington, TX 76010
1-800-848-4517

Sales: [info@durableusa.com](mailto:info@ durableusa.com)
Engineering Support: [engineer@durableusa.com](mailto:engineer@ durableusa.com)



DURABLEUSA.COM

DURABLE U.S.A. INC.
Corporate Office: 2801 E. Abrams St., Arlington, TX 76010
1-800-848-4517

Sales: [info@durableusa.com](mailto:info@ durableusa.com)
Engineering Support: [engineer@durableusa.com](mailto:engineer@ durableusa.com)



DURABLEUSA.COM